

## FEATURES

- Speaker Level Input Accepts Up To 400 Watts RMS
- Bass Enhancer Bass Compensation
- Selectable Auto ON
- 9.5 Volt Pre-out
- 12 Volt Trigger Out
- Dual Amplifier Outputs
- Level Matching Controls
- Dash Remote Level Control

## SPECIFICATIONS

Maximum Speaker Level Input.....	400 watts per channel @4 Ohms
Maximum Preamp Output.....	9.5V RMS / 12V
Dash Level Control Remote.....	+0dB / -19dB
Frequency Response .....	10Hz-100kHz; $\pm$ 1dB
Total Harmonic Distortion .....	0.01%
Signal To Noise Ratio .....	>11dB
Input Impedance .....	20K Ohms
Output Impedance .....	150 Ohms
Power Draw .....	150mA
Recommended Fuse Rating .....	1 Amp



# OWNER'S MANUAL


## AB-LC2X

TWO CHANNEL LINE OUT-PUT  
DIGITAL BASS ENHANCER

### OPERATING INSTRUCTIONS

BEFORE OPERATING THE UNIT, PLEASE READ THIS MANUAL  
THOROUGHLY AND RETAIN IT FOR FUTURE REFERENCE

# FUNCTIONS

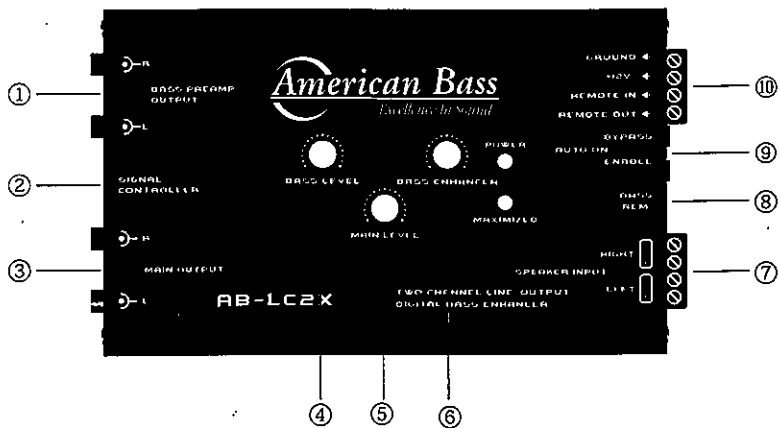

- ① Bass Preamp output
- ② Signal Controller
- ③ Bass Output
- ④ Bass Level
- ⑤ Level Matching Gain Controls
- ⑥ Bass Enhancer
- ⑦ Power Connector
- ⑧ Port for Dash Remote
- ⑨ Auto ON Selector
- ⑩ Speaker Level Input

# SIGNAL CONNECTION

