
CONTENTS Updated 12FEB2024

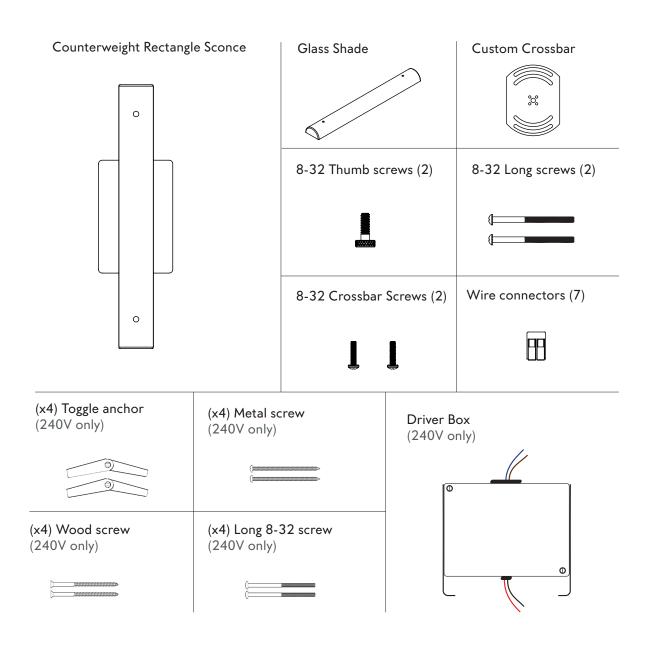

SAFETY INFORMATION

Only suitable for direct mounting on non-combustible surfaces.

Under no circumstances can Counterweight Fixtures be mounted on normally flammable surfaces. Suitable for dry, indoor use only.


Maximum ambient temperatures: 25° C

COUNTERWEIGHT SCONCE INSTALLATION (120V)

Updated 12FEB2024

Note: Please contact a licensed electrician.

- 1. Connect the lead wires from J-box (A) to LED driver (B), with the provided 2-port wagos (C).
- 2. Pull the low voltage wires from the fixture (D), through the center hole of the custom crossbar (E). Then connect the low voltage wires to LED driver with the provided 2-port wagos (F).
- 3. Attach the custom crossbar (E) to J-box (A) with the provided two 8-32 screws (G). Be sure to tuck all the wires into J-box, and not to pinch any wires.
- 4. Secure the fixture (D) to the custom crossbar (E) with the provided two 8-32 long screws (H).

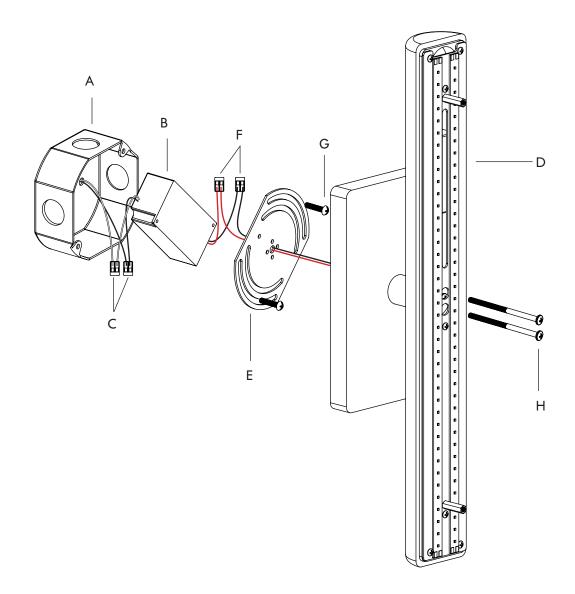


COUNTERWEIGHT SCONCE INSTALLATION (240V)

Updated 12FEB2024

Note: Please contact a licensed electrician.

- 1. Connect the lead wires from 240V driver enclosure (A) with the provided 2-port wagos (B). Then Connect the ground wire with provided 2-port wago (C).
- 2. Pull the low voltage wires from the fixture (D) through the center hole of the crossbar (E).
- 3. Connect the low voltage wires from the fixture to driver enclosure with the provided 2-port wagos (F).
- 4. Secure the custom crossbar (E) to the wall with the provided 8-32 screws or alternative 240V hardware (G).
- 5. Secure the fixture (D) to the custom crossbar (E) with the provided two 8-32 long screws (H).

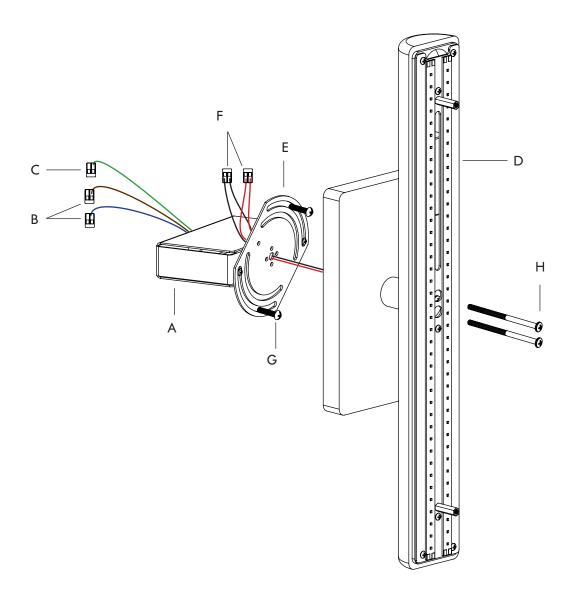

COUNTERWEIGHT SCONCE INSTALLATION

Updated 12FEB2024

Glass Assembly

- 1. Position the holes of the glass (A) over the holes of the standoffs (B) on the fixture.
- 2. Fit the nylon washers (C) into the glass holes. Then screw the 8/32 thumb screws (D) until the glass is firmly pressed against the wood. Do not over tighten or the glass may break.

