




LeonLite | LITE^{edge}

5W Smart Low Voltage Garden Light

User Manual
Notice d'Emploi
Manual De Usuario

*HUB REQUIRED


DOWNLOAD LITEDGE APP




*HUB REQUIRED

PACKAGE CONTENT

INCLUDED

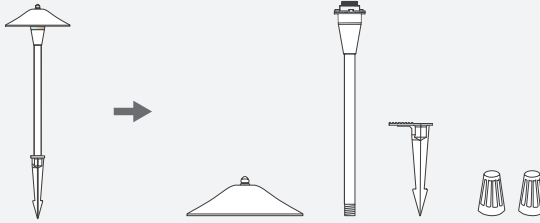

NECESSARY TOOLS (Not included)

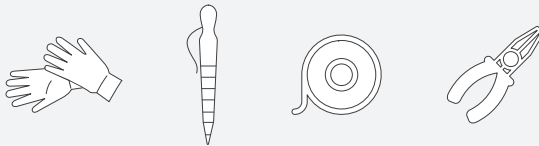

PRODUCT FEATURES



HUB REQUIRED
FOR REMOTE CONTROL



BLUETOOTH



OUTDOOR



ELECTRICIAN
REQUIRED



AC/DC 12-24V
ONLY



IP65
WATERPROOF



-4°F-104°F
WORKING TEMP



0-12 CHILDREN
WARNING


IMPORTANT SAFETY INSTRUCTIONS




- PLEASE READ AND UNDERSTAND THE ENTIRE MANUAL BEFORE OPERATING OR INSTALLING THIS PRODUCT.
- ONLY use this light on 12-24V AC/DC circuits.
- The maximum load (combined total wattage of all lights) should NOT exceed 80% of the total power rating of the transformer.
- The wire is intended for shallow burial (less than 6 inches deep).
- Install ALL lights at least 10ft away from pools, spas, or fountains.
- Keep the lights away from flammable or combustible materials.
- DO NOT touch the lens, guard, or light housing while in use.
- DO NOT operate or install a light with missing or damaged parts.
- DO NOT submerge this light in water as this may damage it.
- Vertically mount the transformer at least 12 inches above the ground.
- Keep this light out of the reach of children under 3 years old.
- DO NOT connect this light to electrical systems that DO NOT have grounding.

INSTALLATION


- !** Turn off the main power switch before installation.




12-24V AC/DC Output




- 1** Screw the stake onto the light pole.

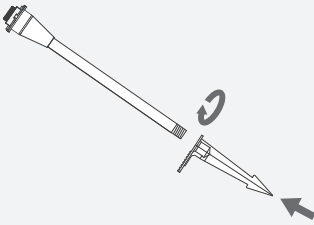


- 2** Screw the light shade onto the light pole.

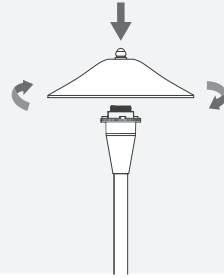

- 3** Modify the power wire.

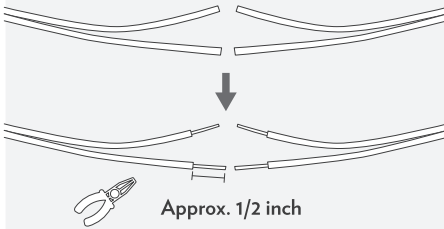


- 4** **Note:** Hide bare wires inside the wire nuts.

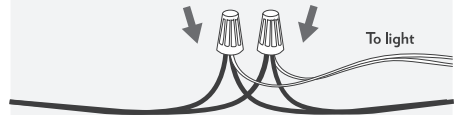


Short Circuit Warning: If you are using a DC system, make sure you group the positive and negative into different wire nuts.


- 5** Fasten the wires tightly together.

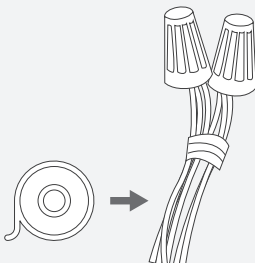

- 6** Connect all remaining lights to the system then install in place.

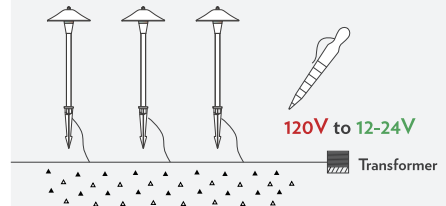

- 7 Flip the switch to bring your lights back to life. Keep an eye out - when it starts blinking, you'll know that it's ready for a connection with your smartphone.

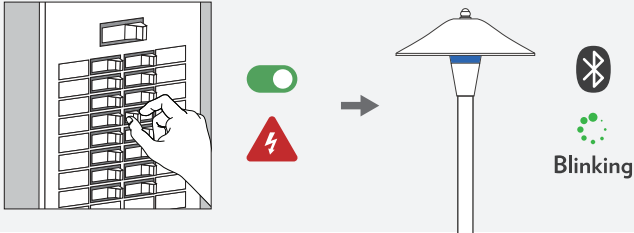


TROUBLESHOOTING

Factory Reset/Re-Enable Pairing Mode


Method 1

- a1 Unscrew the light shade. Press and hold the button for 5 seconds.

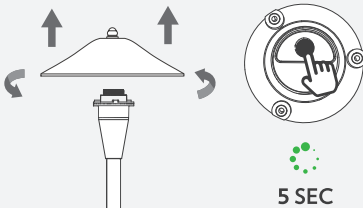


Method 2

- b1 Turn the lights OFF-ON five times.

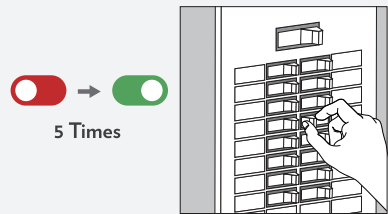

- 2 Ready to connect.

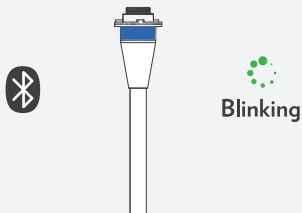

- 3 Link to online quick start guide.



1-800-990-7688 (Toll Free)



www.leonlite.com/contact





TORCHSTAR CORP

LeonLite

LITEdge

3768 Milliken Ave, Suit A
Eastvale, CA 91752

Questions or Comments

1-800-990-7688

info@leonlite.com

www.leonlite.com

© 2022 TORCHSTAR CORP

All rights reserved