


FASCO MOTORS MAY PROVIDE TECHNICAL ASSISTANCE TO OUR CUSTOMERS IN MANY AREAS. HOWEVER, SINCE FASCO MOTOR IS NOT AWARE OF ALL DATA CONCERNING THE USE AND APPLICATION OF THIS MOTOR, THE FITNESS OF THE MOTOR FOR THE APPLICATION MUST BE DETERMINED BY AND IS THE RESPONSIBILITY OF THE CUSTOMER.





THIRD ANGLE PROJECTION

MOTOR SPECIFICATION

808554PVA-A11

Q.R. No.	7605	CUSTOMER NO.	92432
CUSTOMER	SOUTHCORP		
MOTOR RATING	VOLTS	240	Hz 50 Ph 1 Duty AOM
	RPM.	1200	4.1 AMPS
	NOM. OUTPUT	600 WATTS	
ROTATION	CLOCKWISE DRIVE END		
CAPACITOR	START	-----	μF/V RUN 15/440 μF/V
ENCLOSURE	FULLY VENTED		
MOTOR TYPE	CSR	INSULATION CLASS	B130
THERMAL PROTECTION	AUTO RESET OVERLOAD		
APPLICATION	FAN		
BEARING D.E.	6202ZZ	LUBRICATION	LONG LIFE, WIDE RANGE
BEARING N.D.E.	6202ZZ		
SUPPLY LEAD	SINGLE CORE 360±30 BRAIDED SLEEVING		
EARTH PROVISION	VIA SUPPLIED LEAD		
BASIC BUILD SPECIFICATION	305-570-03	PAINT/ COLOUR	P.C. GREY PLAIN E/SHIELDS
PERFORMANCE SPECIFICATION	SP85036-03		
CONNECTION DIAGRAM	393-402-01	RATING LABEL	SSTDAUTO.FMT

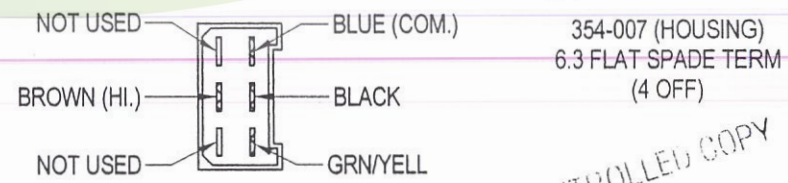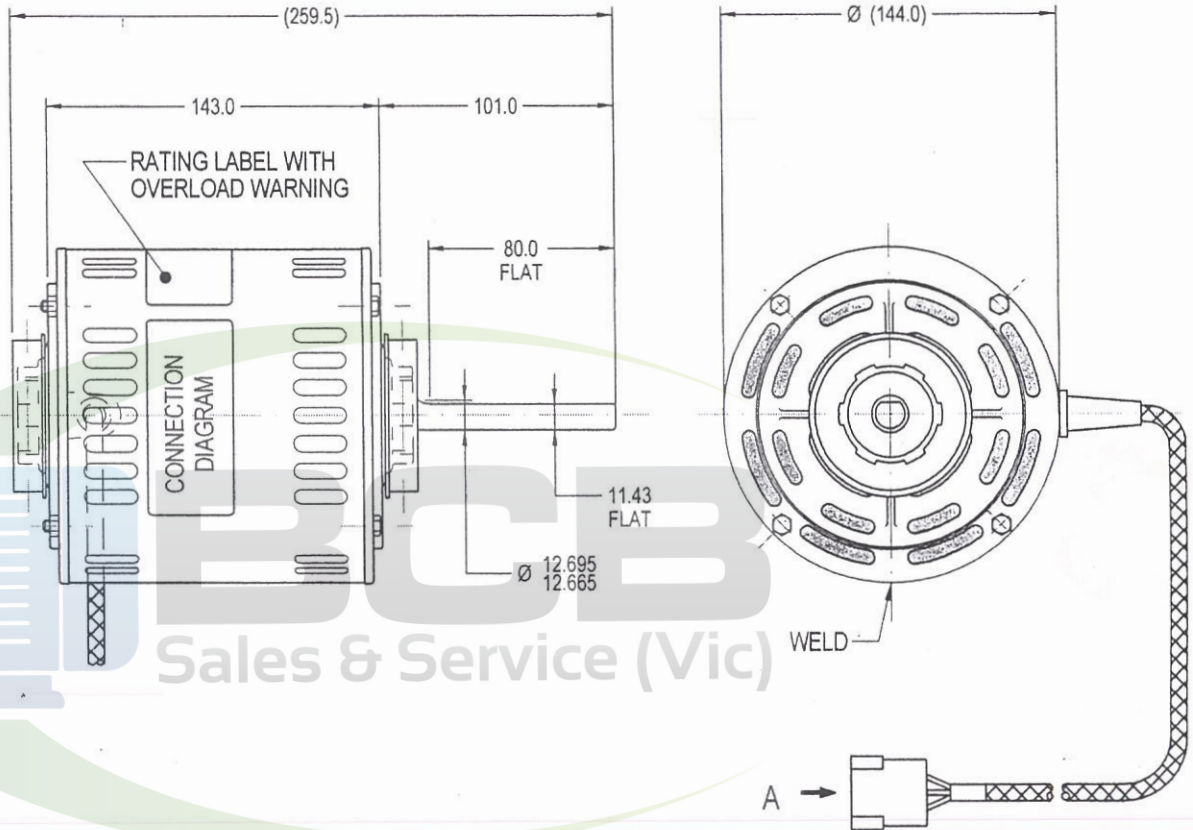

VIEWED IN DIRECTION OF ARROW 'A'

CONTROLLED COPY
12 AUG 2009

FASCO DESIGNED AND MANUFACTURED TO AUSTRALIAN STANDARDS & SPECIFICATIONS

N693

CUST. No. 92432 ddmmyxxxx

MODEL 808554PVA-A11

VOLTS 240	R.P.M. 1200	CLASS B130	Hz 50
WATTS 600	TYPE CSR	μF/V S NIL	Ph 1
AMPS 4.1	DUTY AOM	μF/V R 15/440	PROT. AUTO

WARNING MOTOR FITTED WITH INTERNAL AUTO RESET OVERLOAD AND MAY RESTART WITHOUT WARNING

35.0

87.0

SPECIAL REQUIREMENTS:
1)_CAPACITOR SUPPLIED BY CUSTOMER.

UNLESS OTHERWISE SPECIFIED : DIMENSIONS ARE IN MM. TOLERANCES

DECIMALS	ANGULAR
.X ± 1.0	± 30'
.XX ± 0.5	

THIS DRAWING REMAINS THE PROPERTY OF FASCO MOTORS AND MAY NOT BE USED, COPIED OR ISSUED WITHOUT WRITTEN PERMISSION FROM FASCO MOTORS

BCB SALES & SERVICE
PH : 03 9546 3833
FAX : 03 9546 3356

MATL & FINISH	NUTAPON
DRAWN	PIPAT
CHECKED	KITTI
RELEASED	
SCALE	

NONHABURI 11000 THAILAND

FRAME	MOTOR
STATUS	036:8554V-600-KAD:ILEC
SHEET	DWG. NO. 808554PVA-A11
A3	REVISION J

MIC No. 003766
BY: ORAN
Date: 29/03/01
MIC ADD NAME PLATE AND UPDATE E/SHIELDS
Note: