



Electronic Keyless Deadbolt Lock #11-0421 #11-2421 #11-1421 Bright Brass Satin Chrome Antique Brass

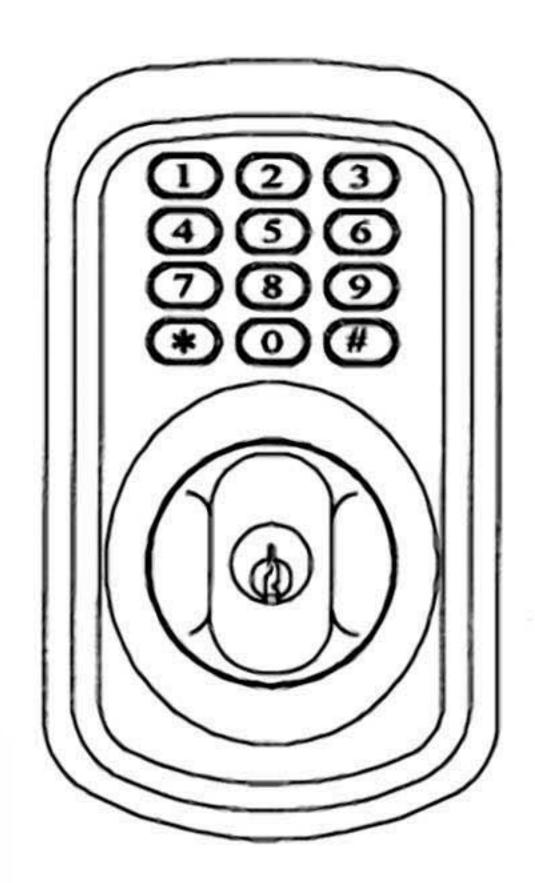

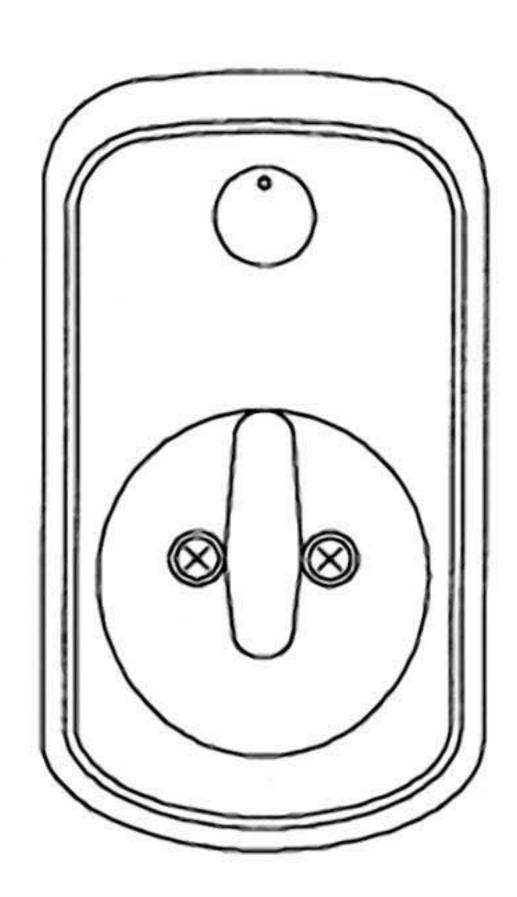

Gino Development Inc. 2140 Ward Ave. Simi Valley, CA 93065

www.ginodevelopment.com Product Support: 855-288-6657 Thank you for your purchase. Your new keyless lock features a unique design for ease of installation, reliable operation, advanced security and key-free convenience. Universal door compatibility ensures installation in any standard door with no modifications.

To preview the installation steps and become familiar with your new lock, please read the manual completely before proceeding to install the lock.

Installation requires a door with a standard pre-drilled opening.


New uncut (blank) doors and uncut doorjams must be drilled with standard openings.

Use the templates on Page 2 as a reference if you will be cutting new openings.


Tools & Batteries Required:


- 1) Philips Screwdriver
- 2) 4x "AA" Alkaline Batteries

Installation Step 1

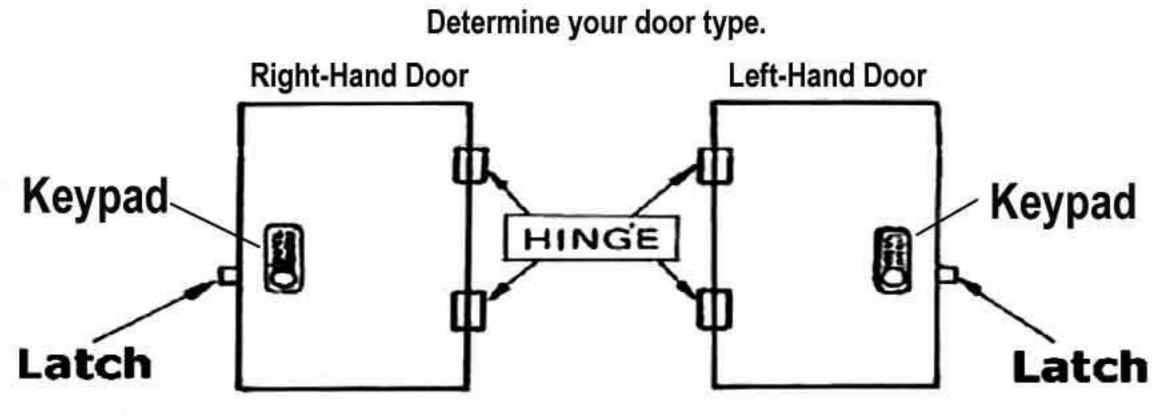


Step 2: Part Assembly by Door Type

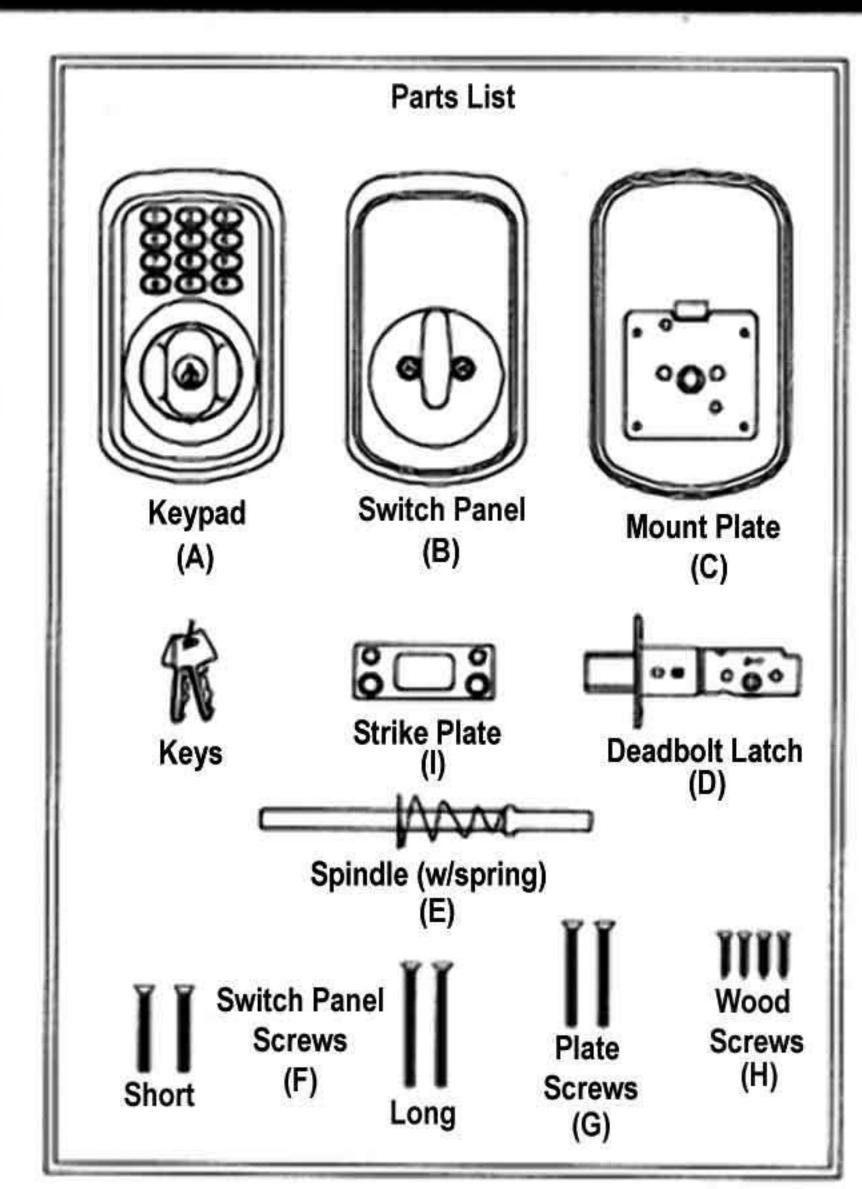


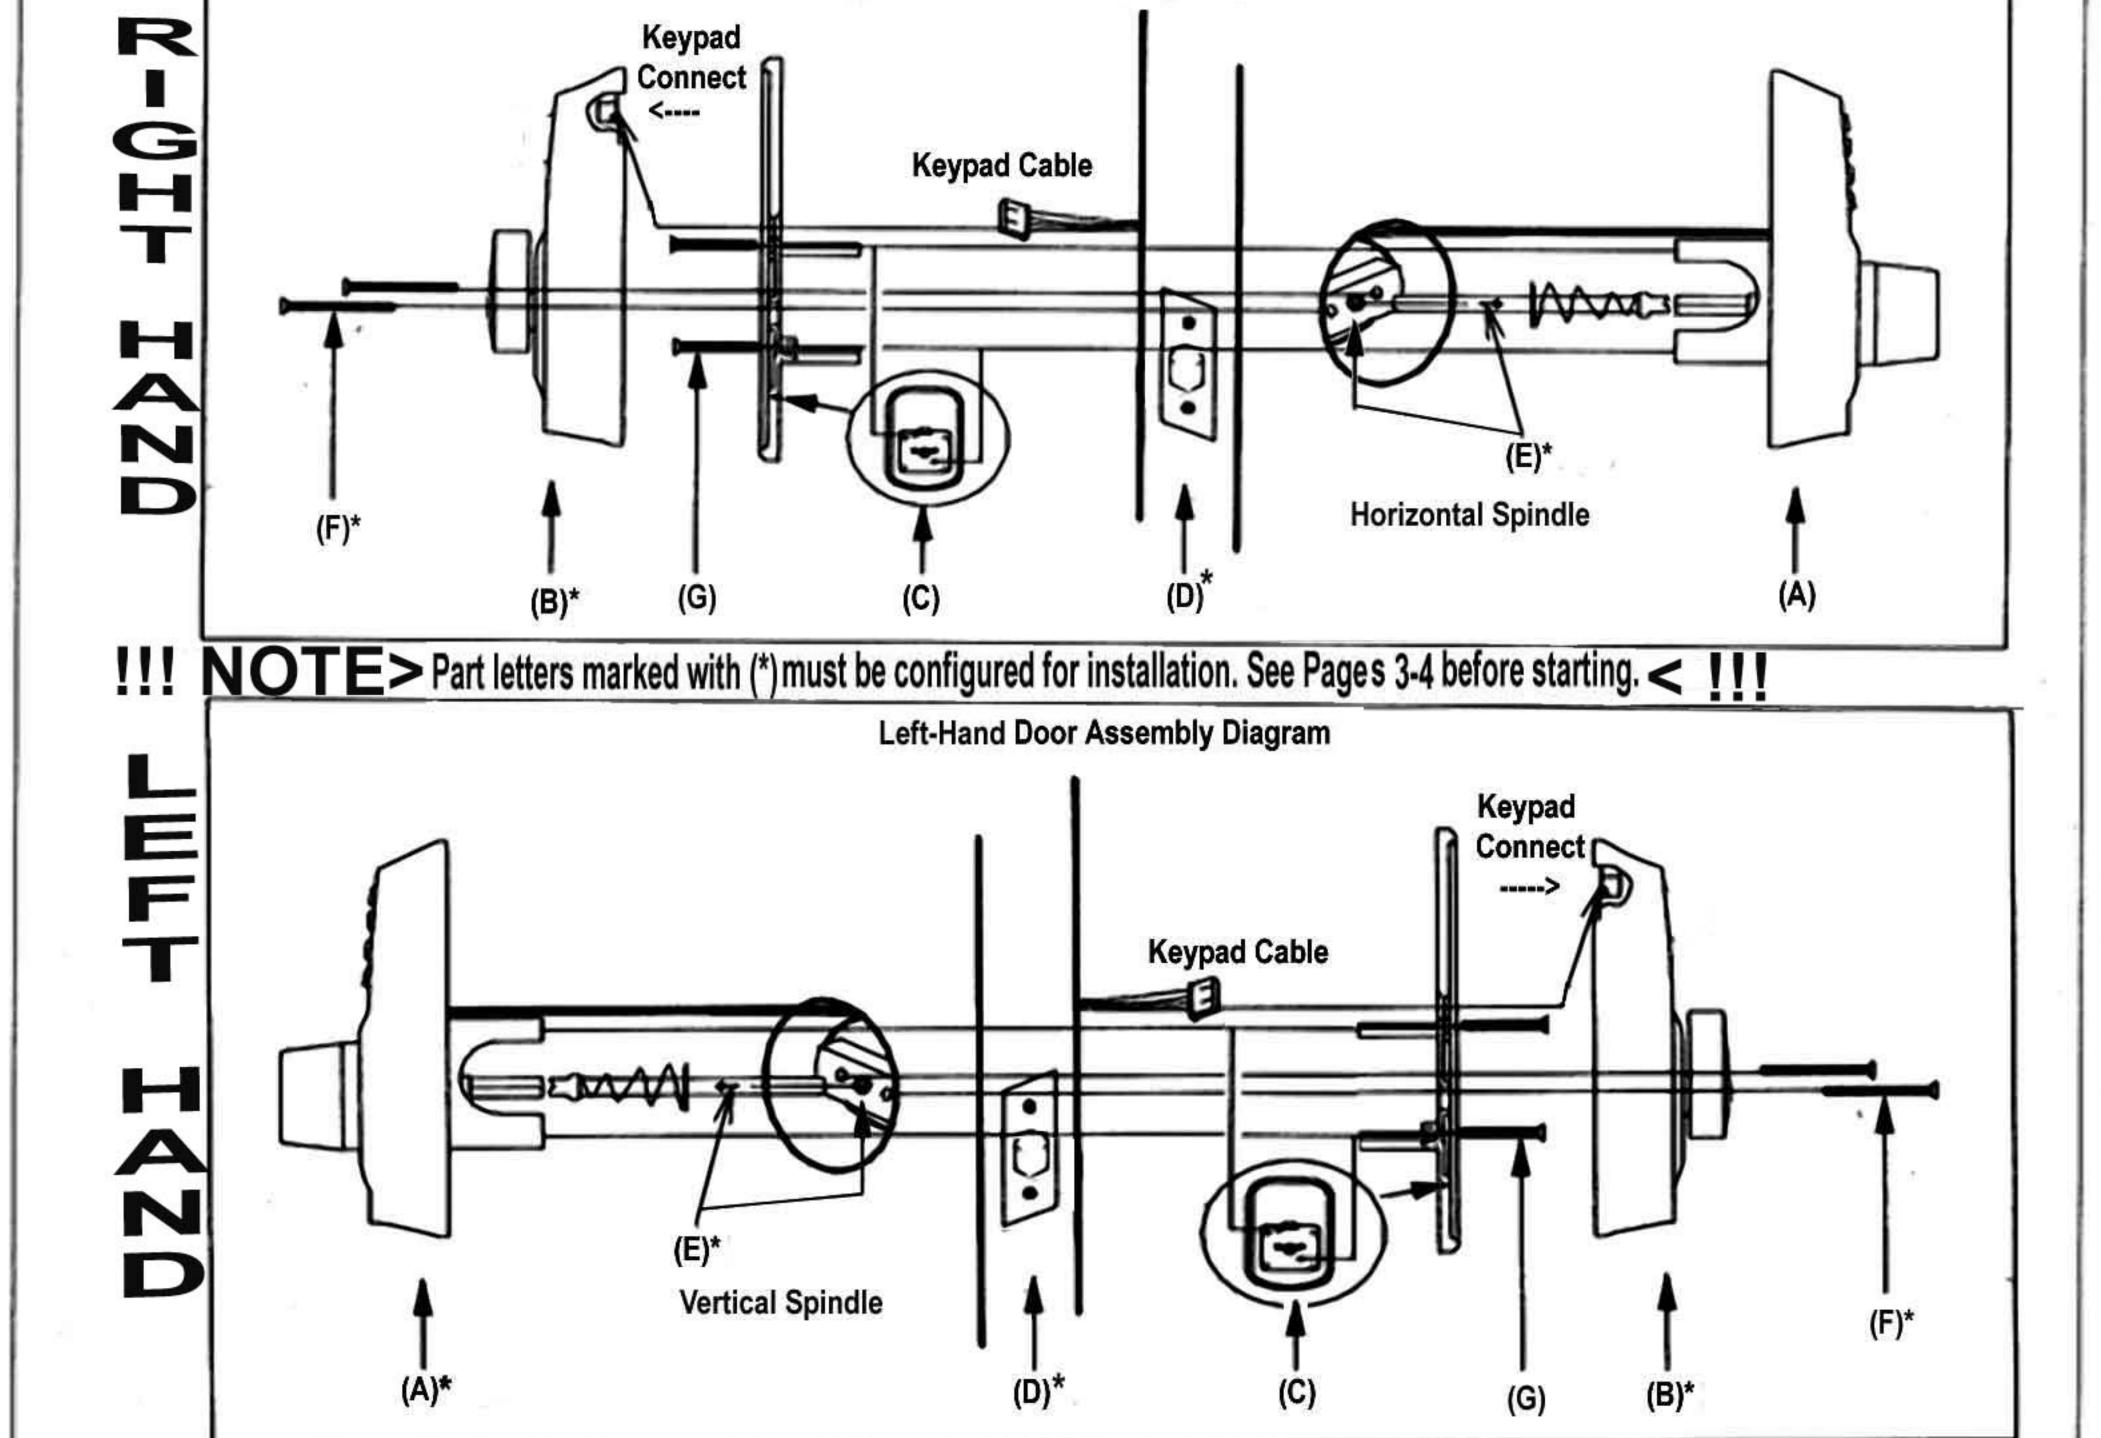

Right-Hand Door Assembly Diagram


Assembly Sequence: 1.Install Latch 2.Insert Spindle into Keypad 3.Position the keypad on door with spindle into latch 4.Run cable through door then into square hole in Mount Plate 5.Attach Mount Plate using Plate Screws 6.Connect Cable and mount Switch Panel using Panel Screws. 7.Attach strike plate to door jam using wood screws 8.Check strike plate for proper alignment with deadbolt and adjust strike plate if necessary.

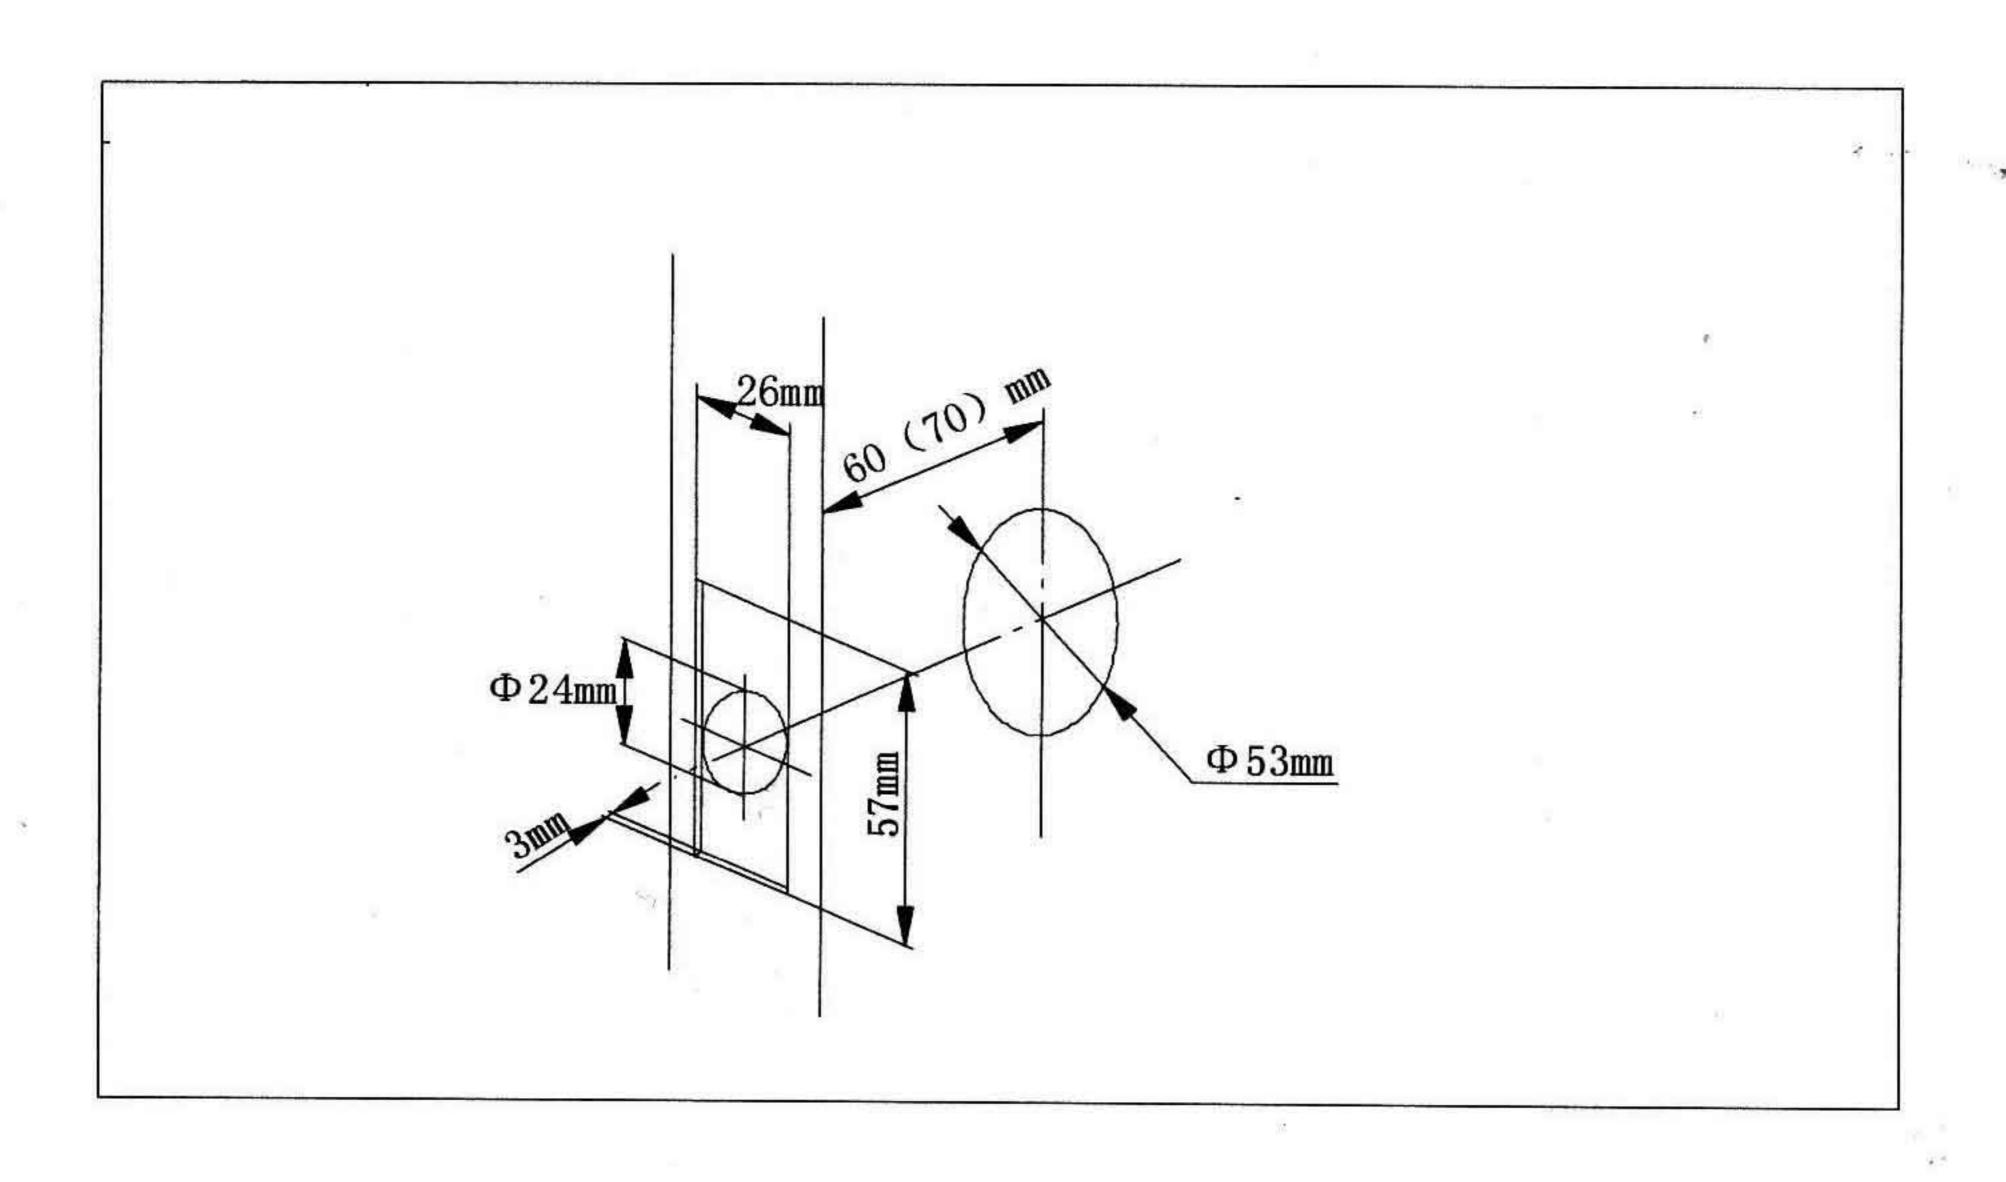


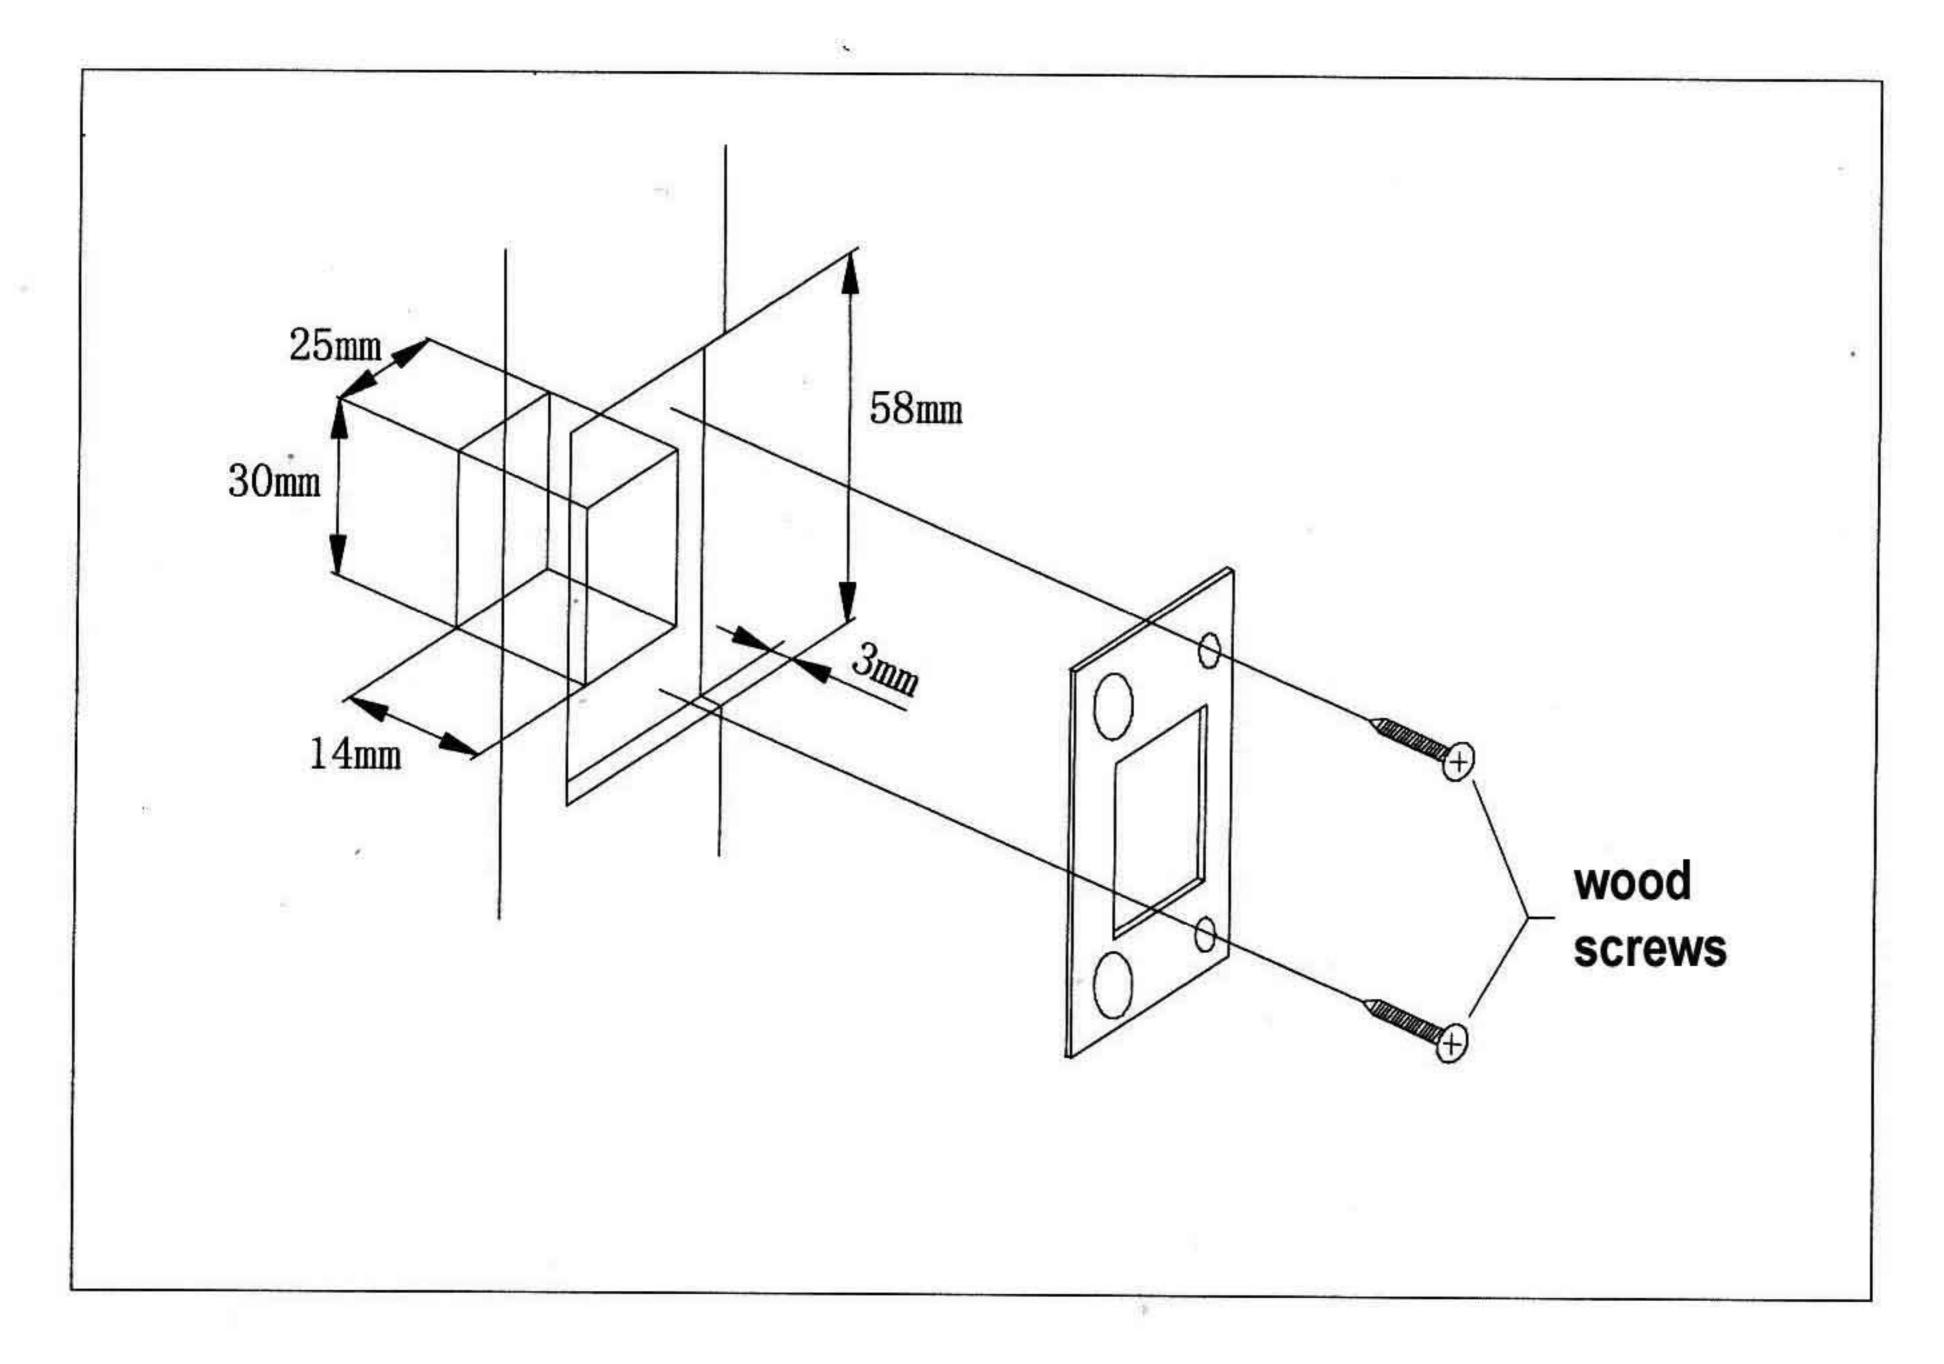


Installation Note (A): Left-Hand Door Handle Rotation Direction


If your door is Left-Hand complete the following steps before mounting the lock.

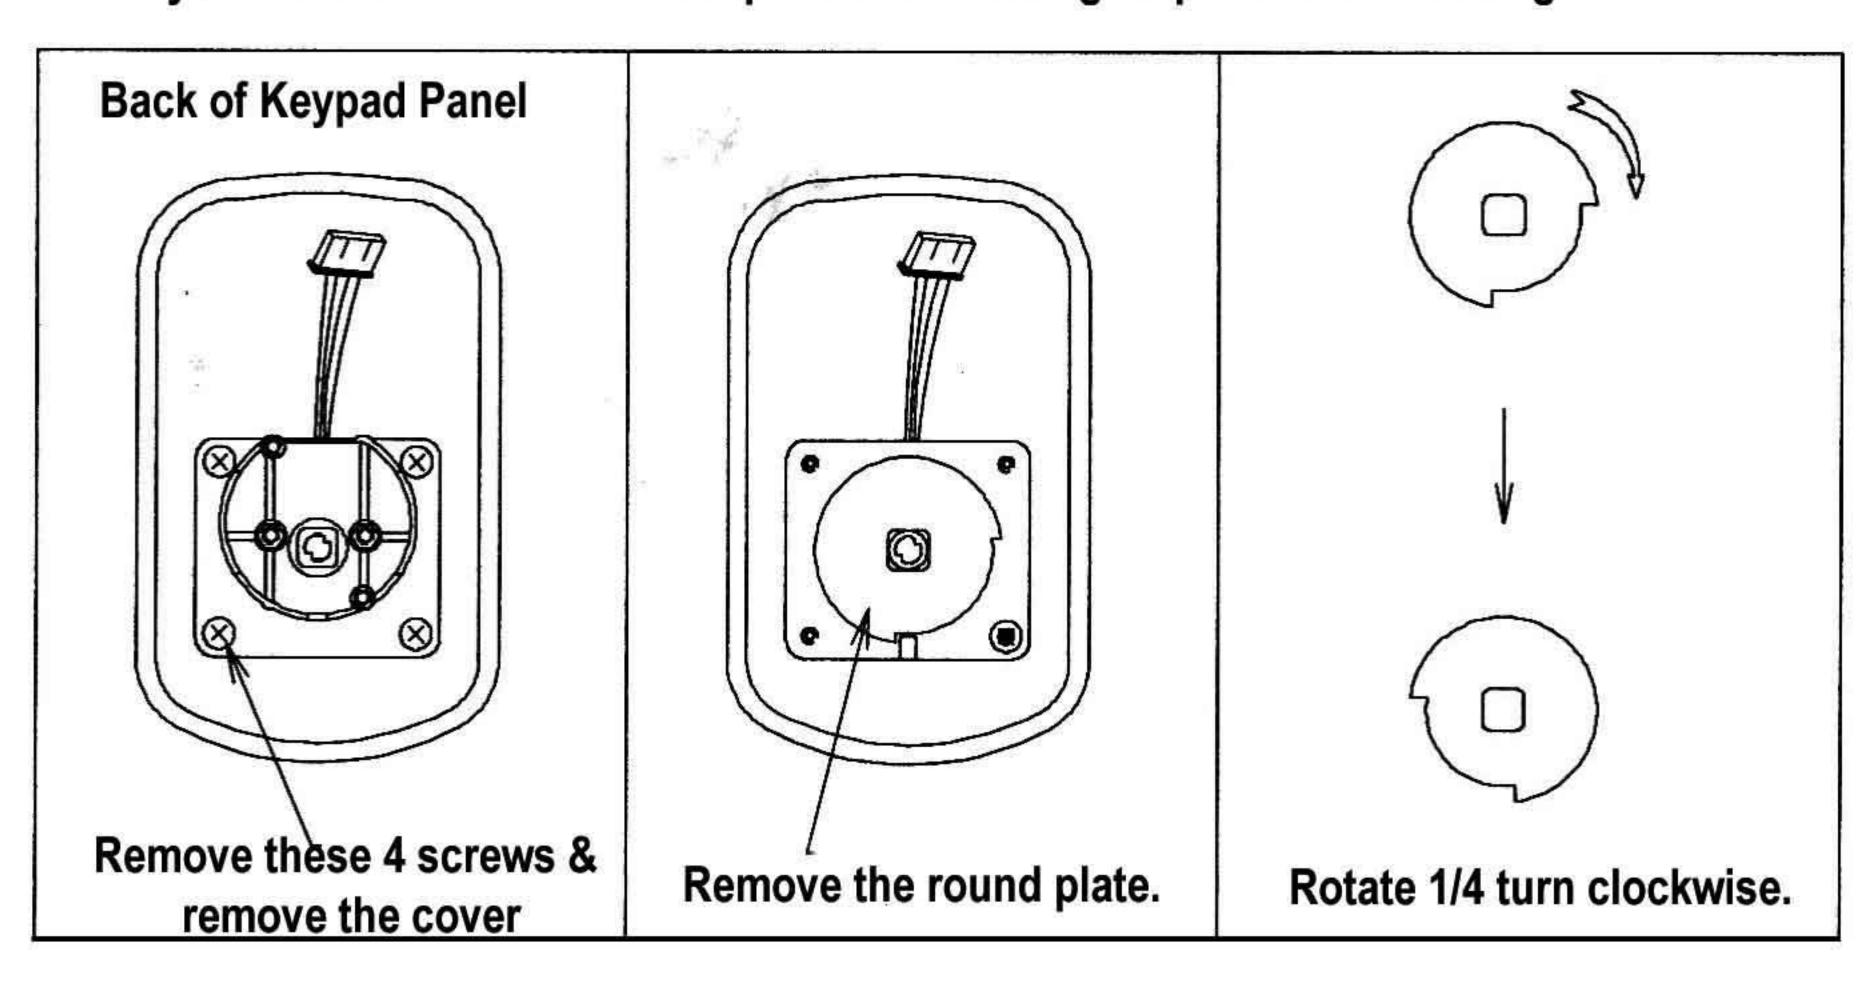


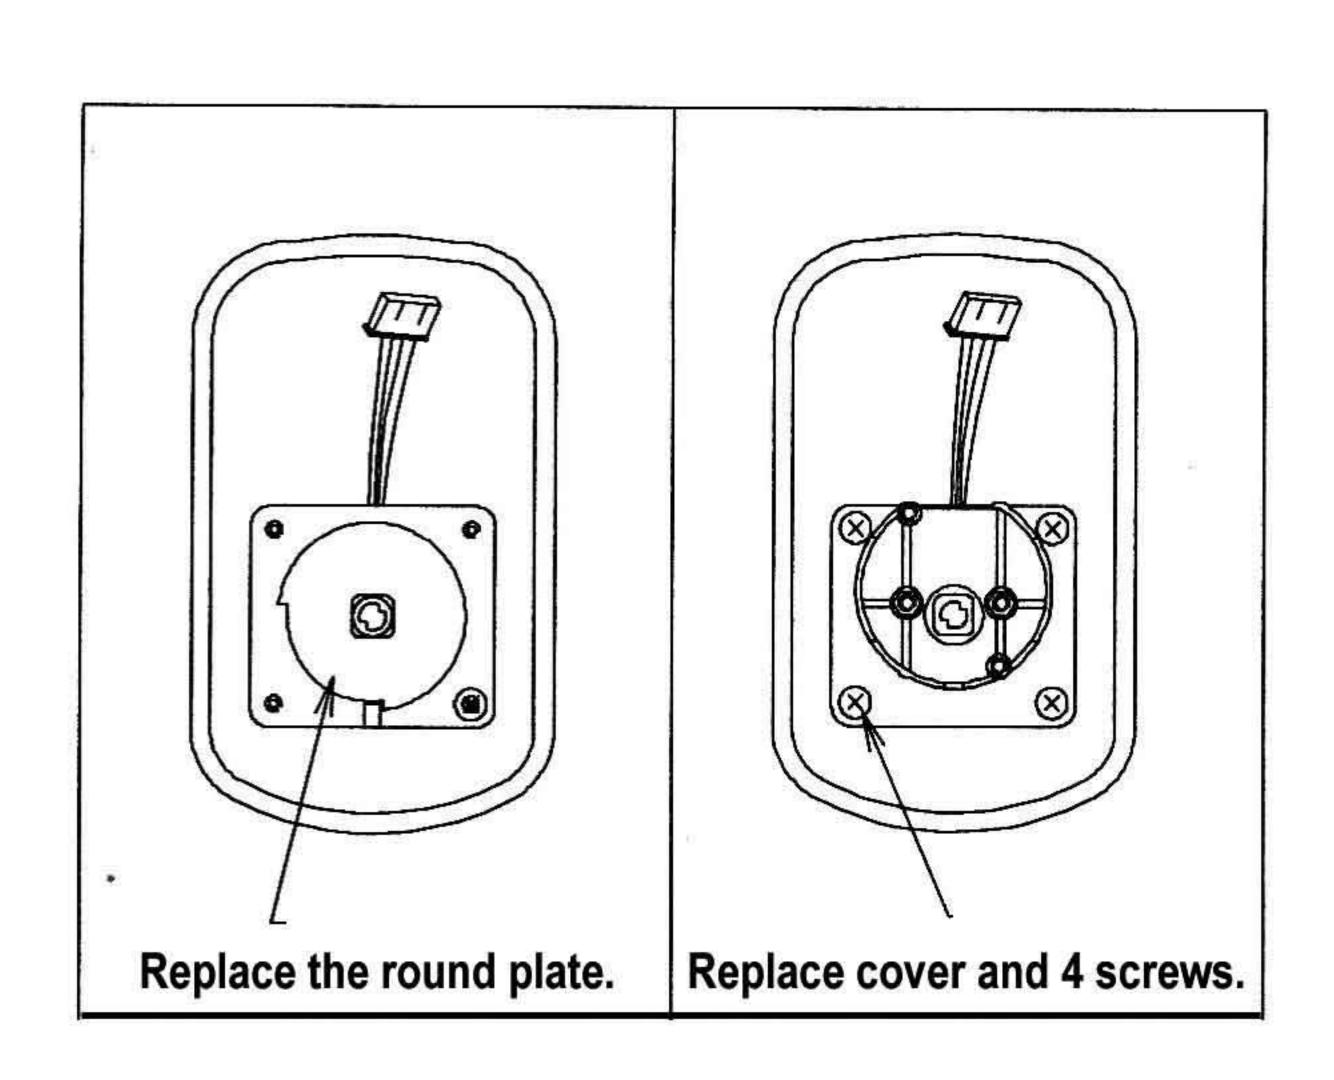

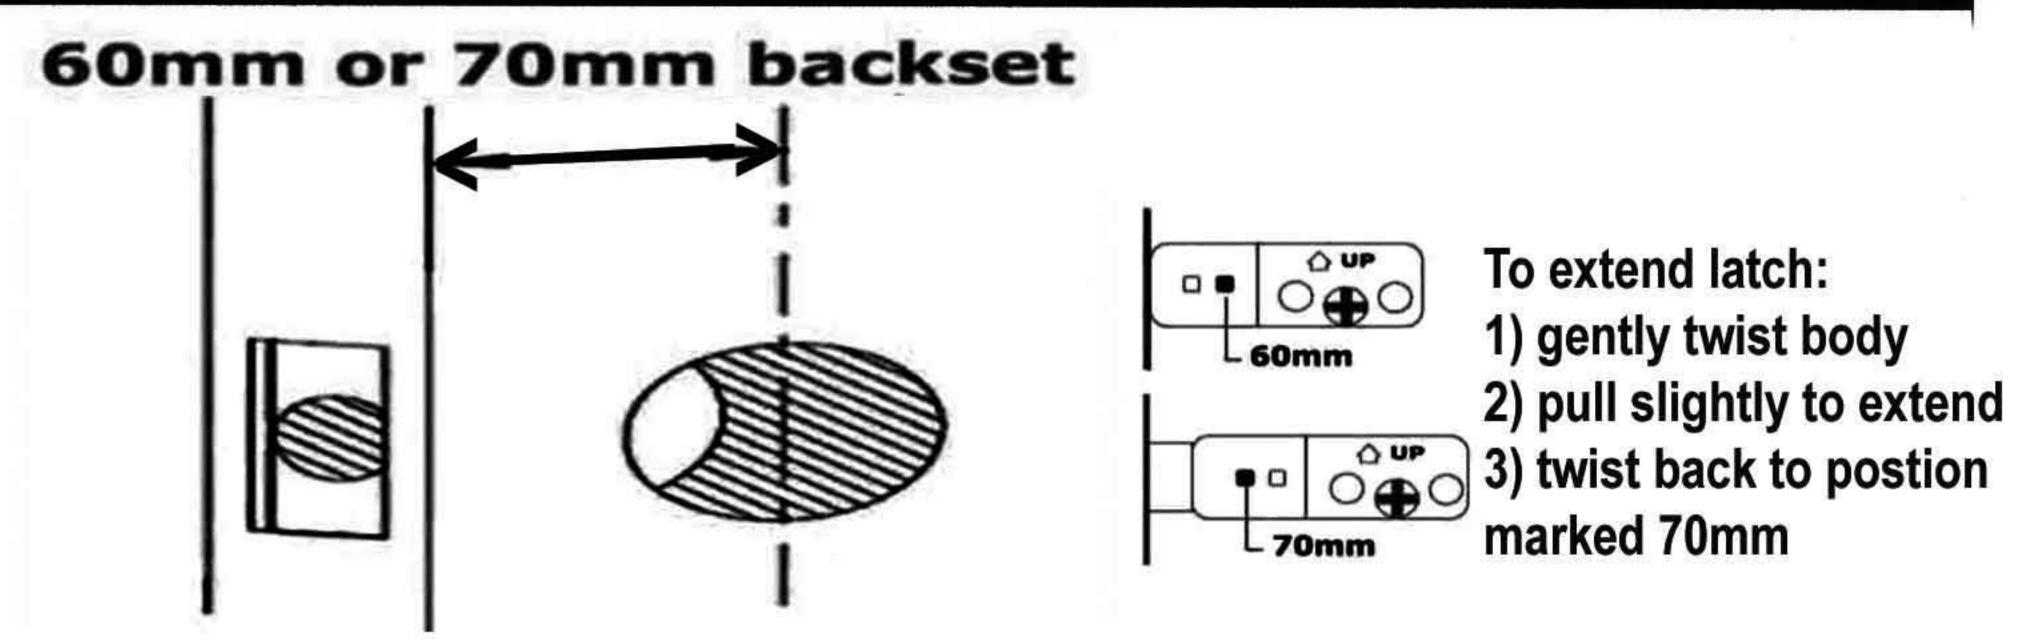

Installation Note (D): Adjust Latch for Backset 60mm or 70mm

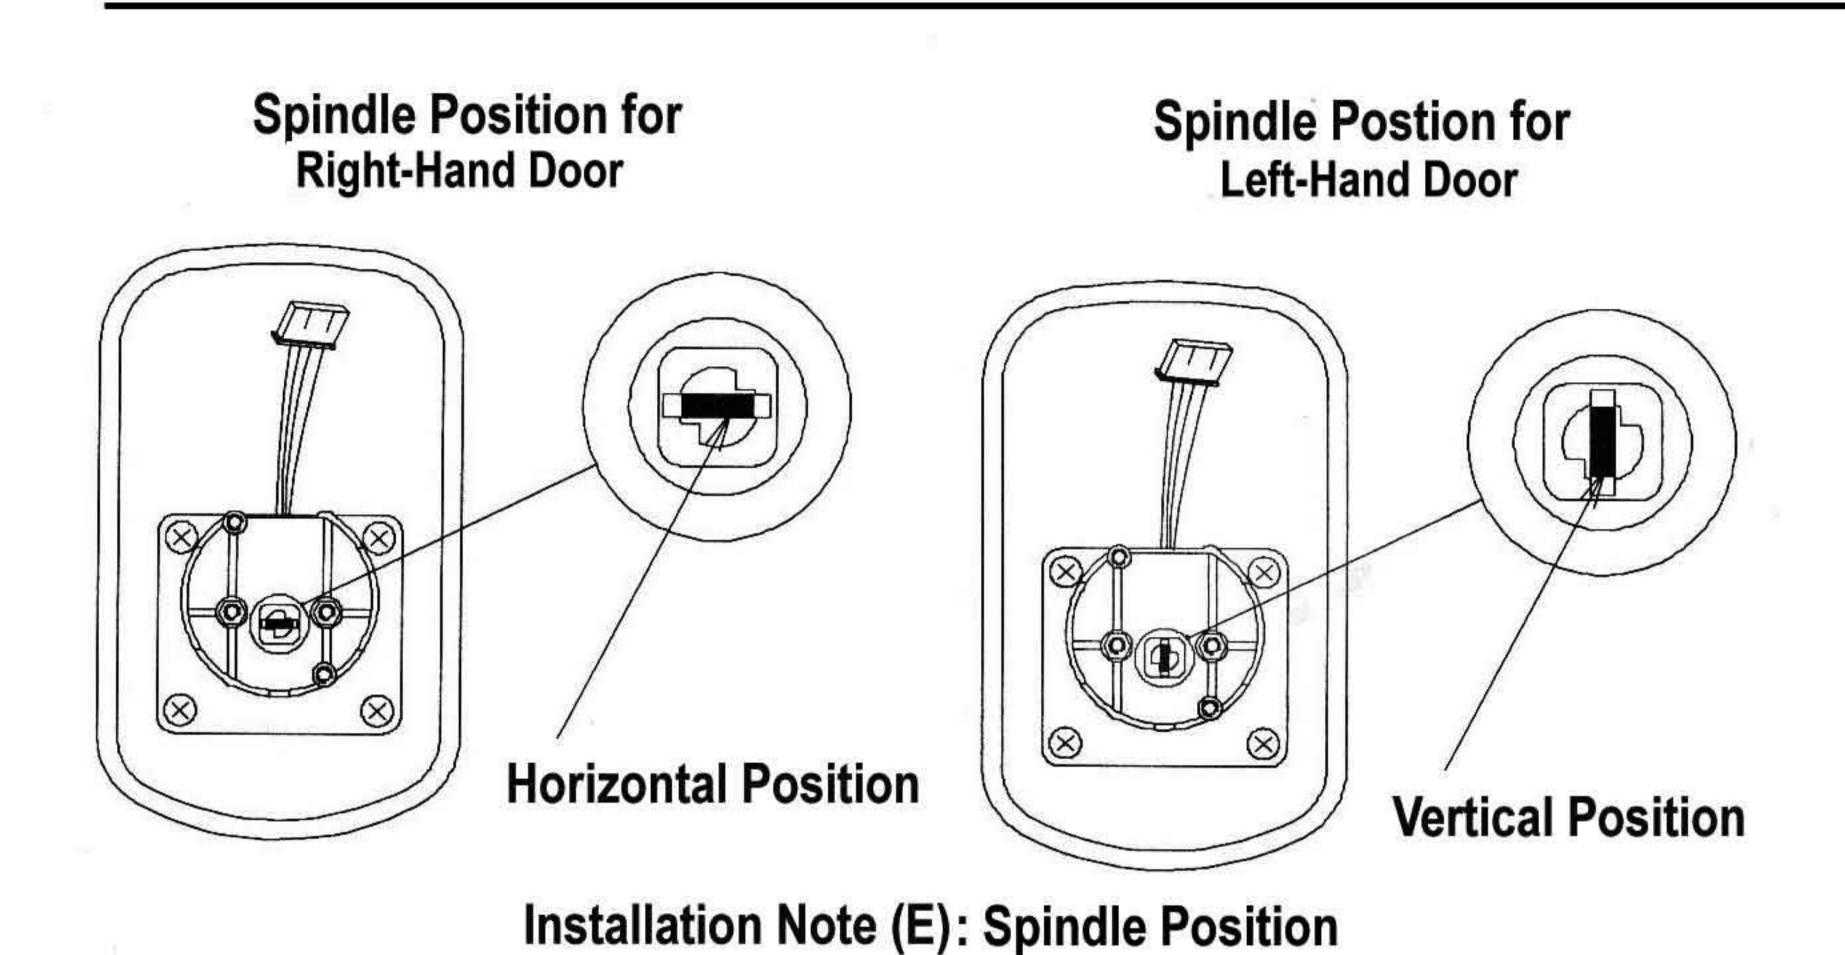

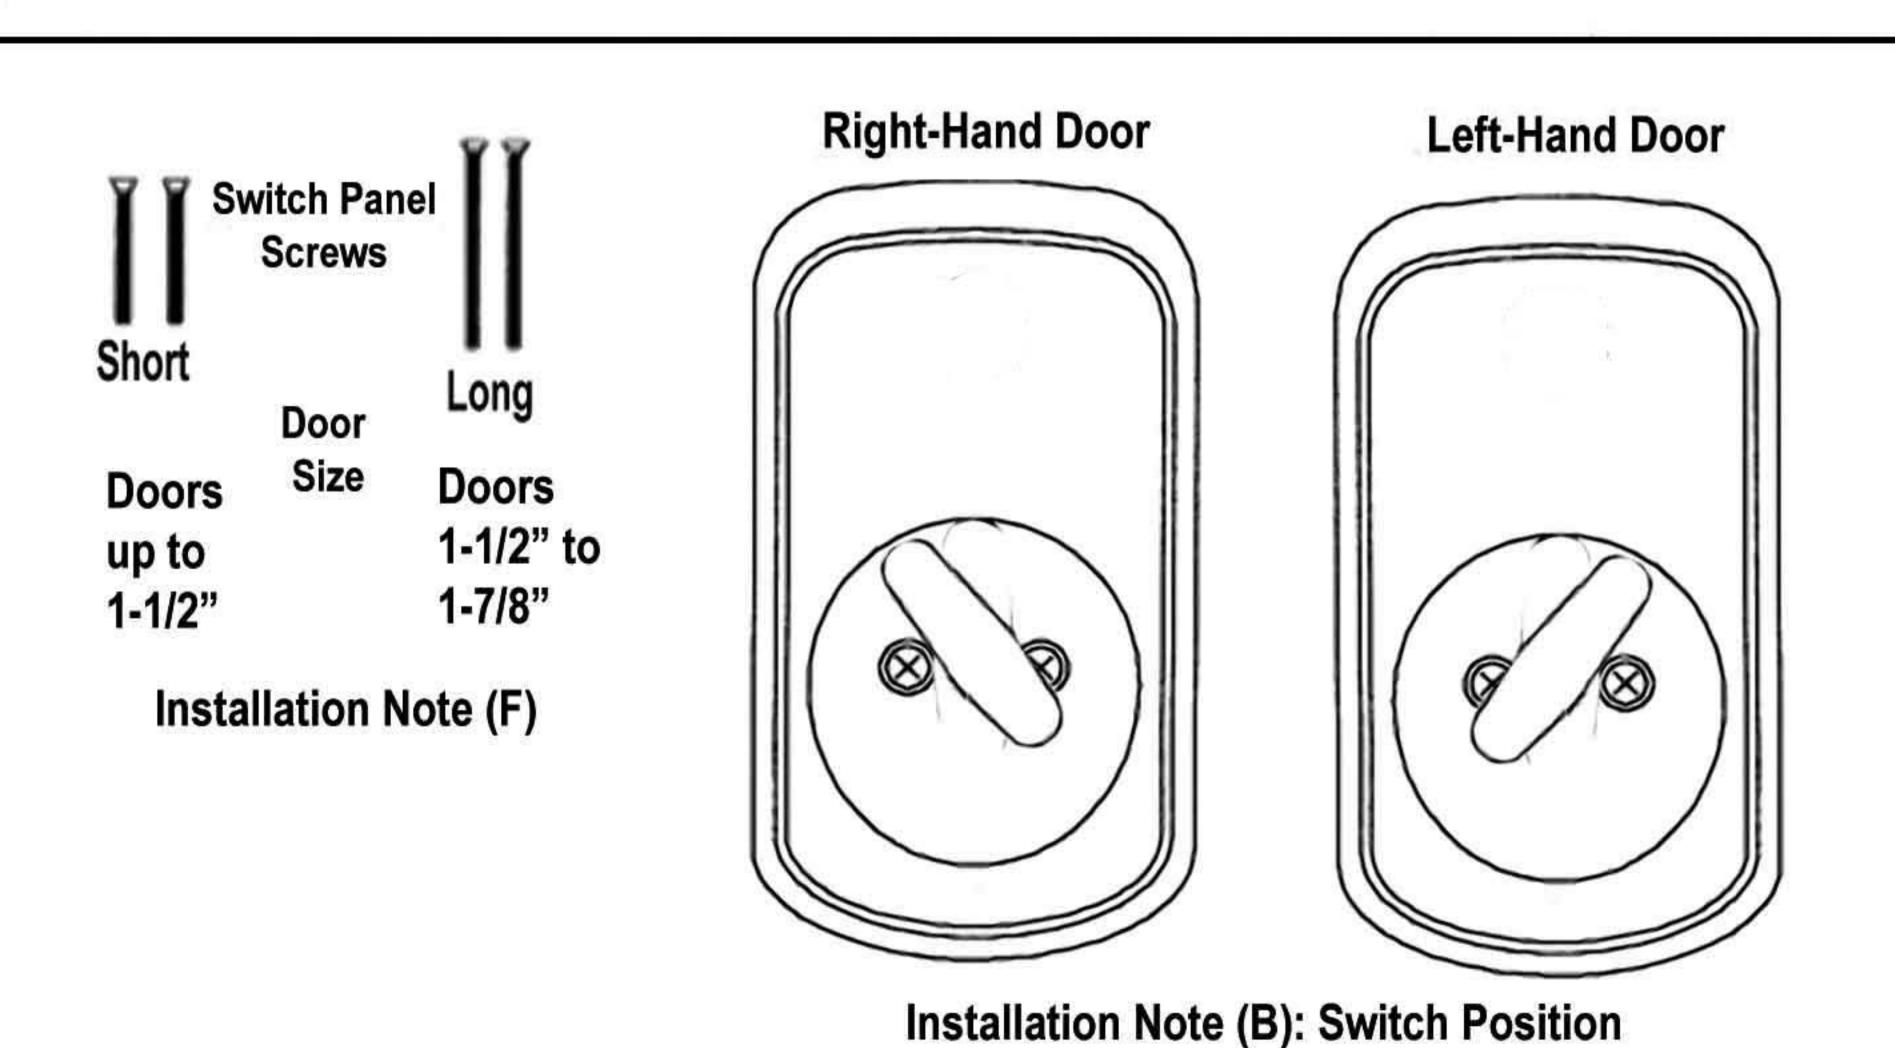

Lock Parts and Function Controls

Please see pg.6 for code programming instructions.


To Lock: Turn handle or thumb switch

Program Button

To Unlock: (1)Enter Code (2)Press # or * (3) Turn Handle

Bypass keys operate in the same way as do standard keys.


Turn Lockout Switch fully clockwise to prevent entry using code or keys.

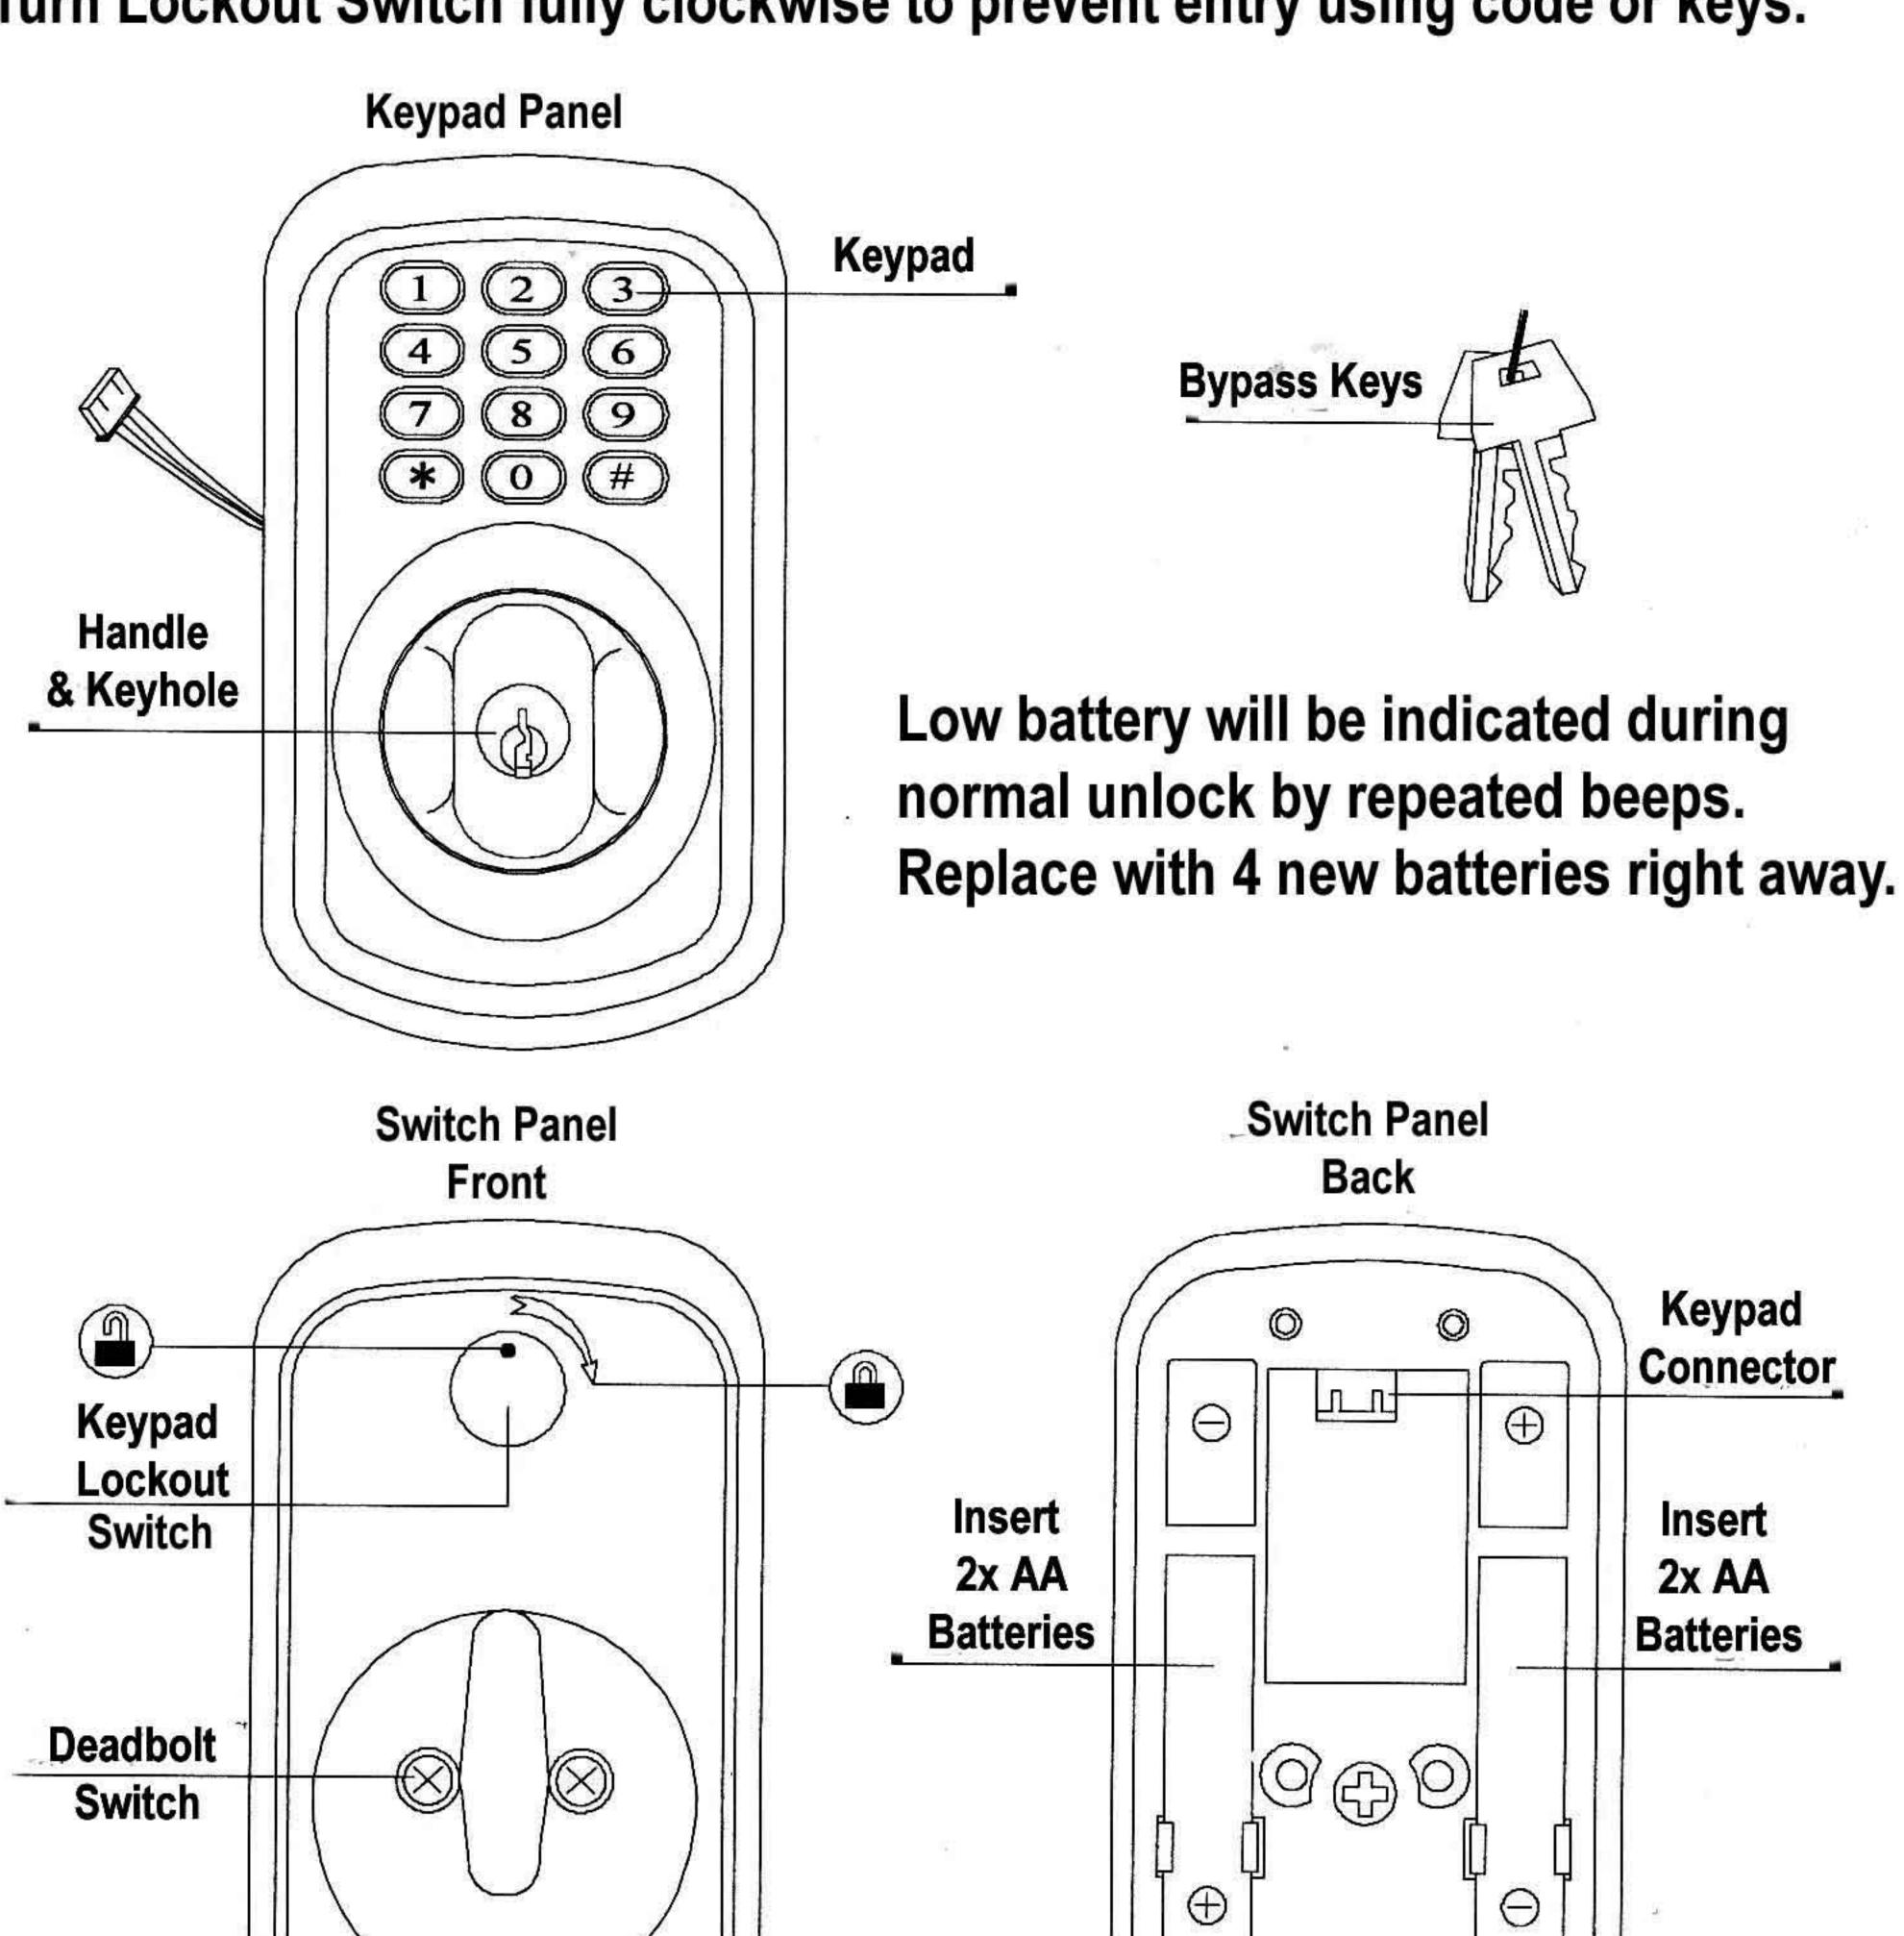


0

Passcode Programming

Starting on the left, follow the steps as indicated to program a Master Passcode for the first time.

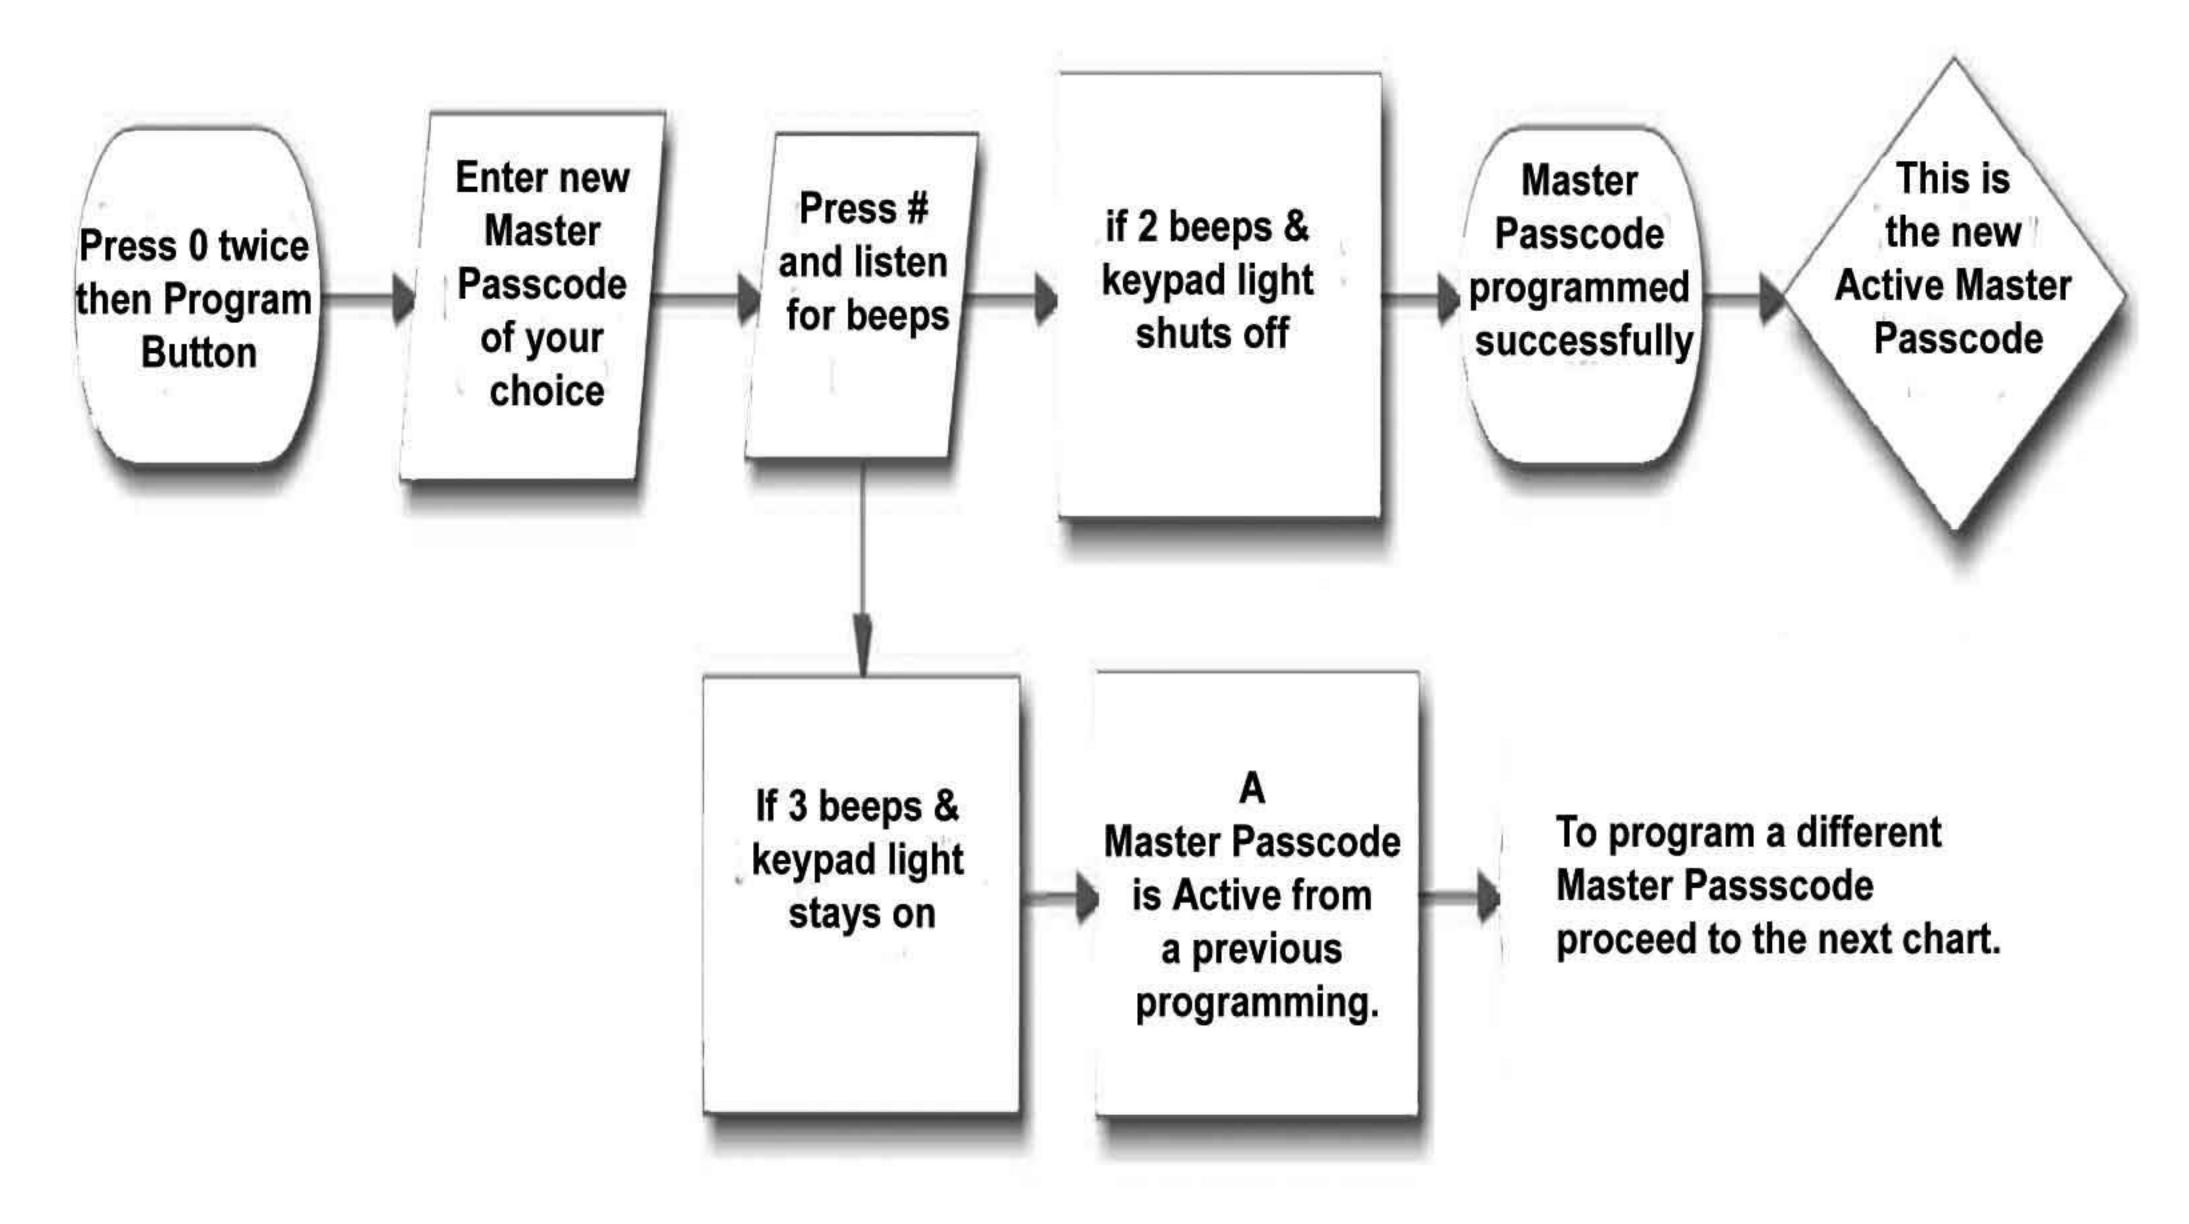

To program a different Master Passcode follow the steps indicated.

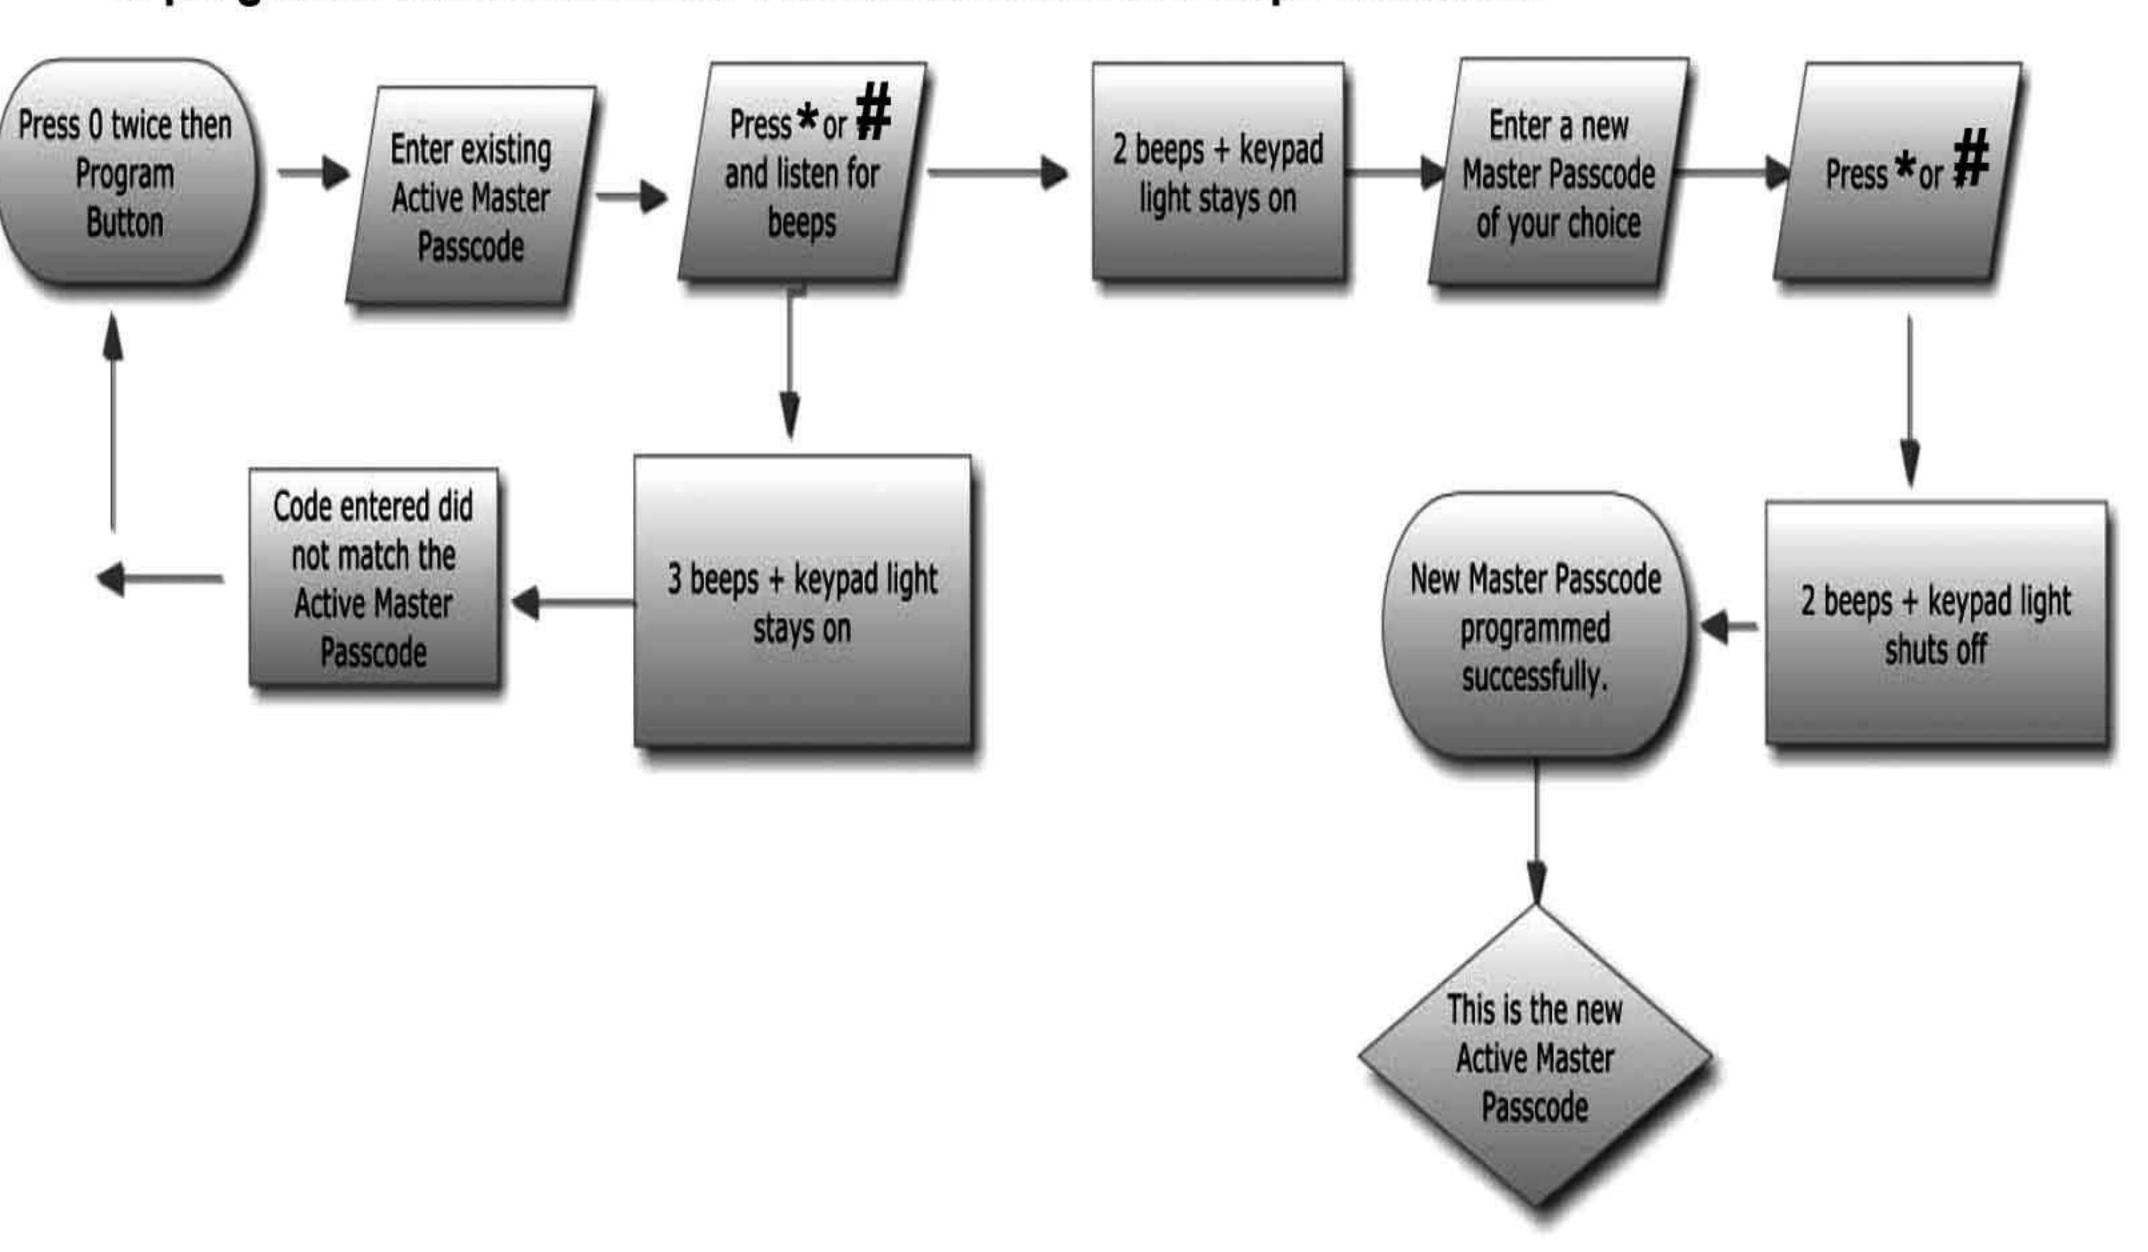

Passcode Programming

To program a User/Guest Passcode follow the steps indicated.

