

URBAN



WiFi App Controlled
Core Smart Plug 10A

USER MANUAL

Quick Start Guide


Thank you for choosing the "CORE Smart Plug 10A" to better use this product, please read the quick start guide carefully before use and properly manage it.

Product Specifications

Product Name: URBAN Core Smart Plug 10A
Model: IBCH009
Rated Parameter: 2500W-10A(Max)250V
WiFi Frequency: 2.4GHz



Product Details

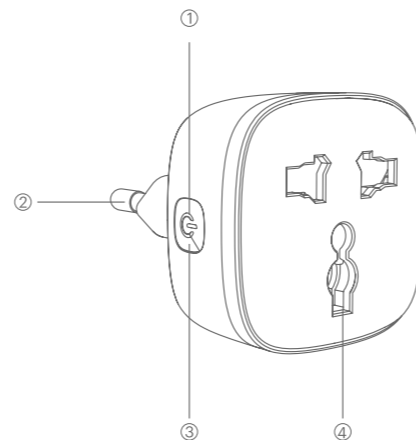

- ① Pilot Lamp
- ② Pin
- ③ Function Button
- ④ Power Jack

Features

- Remote control: One APP control is all kinds of electrical appliances in the home, remote control anytime, anywhere.
- Timing setting: scene timing, such as water heater, night light, fish tank, mosquito coil, charging protection, heater, etc.
- Power-off memory: Set through the "memory function" button on the APP. After the socket is power off and restarted, the state before the power off will be maintained.
- Timing setting: scene timing, such as water heater, night light, fish tank, mosquito coil, charging protection, heater, etc.
- Network disconnection memory: local timing function, set the timing when the network is connected, it can still be executed effectively after the network is disconnected.

Instal the Smart WiFi App


Smart WiFi App controls the actual use operation:

Download the "Smart Life" App on your mobile phone, which can be down load ed for free in all major app stores, and install it directly after the download is successful. (Scan the QR Code to download the App)




Add Device

1. Alter installation, register an account and log in to the interface at the same time;

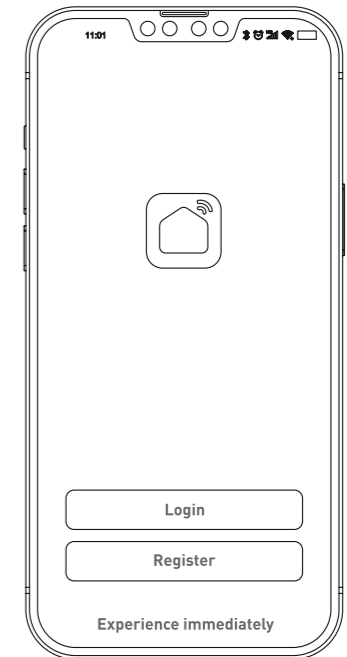


Add Device

2. When the login is successful, press and hold the button of 5-8 seconds at this time Until the LED flashes quickly. Open the App at this time, click on the ADD SYMBOL "+" in the upper right corner, the device name of SCW1050 will automatically pop up The Bluetooth function of the mobile phone is turned on, click "Add", click Next, complete, and connect to the Wi-Fi network (the mobile Wi-Fi must be in the connection state)

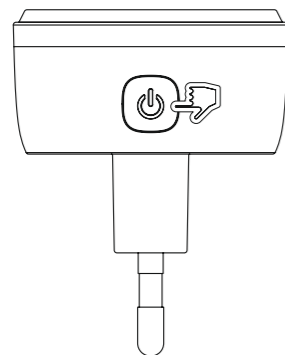


Long Press the button for 5-8 seconds

3. The "Add Device Found" page is displayed.

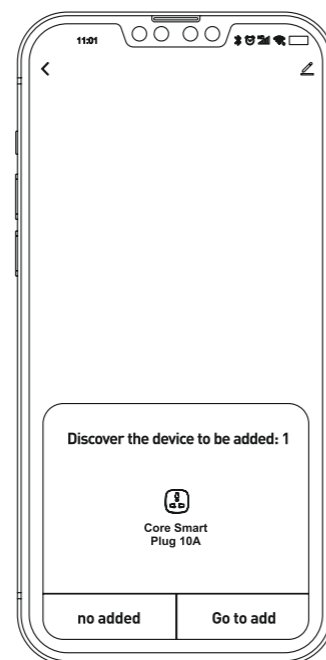


3. After the addition is successful, you can perform remote control socket switch, timing, power-on status settings and other functions on the App.

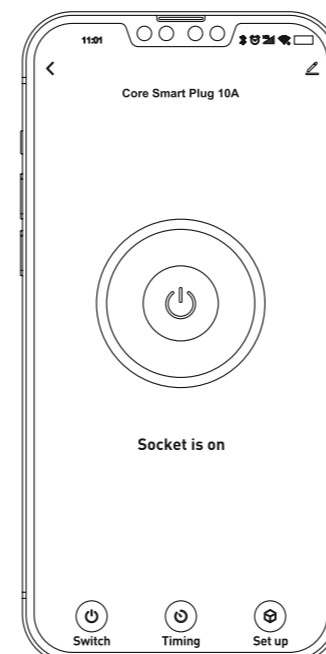

* The socket is successfully connected to the device, and the APP displays "The socket is turned on".

Function Description

Even if the WiFi of the mobile phone is turned off, it can be controlled remotely through data flow. {Note: The WiFi socket must be connected to the Internet}

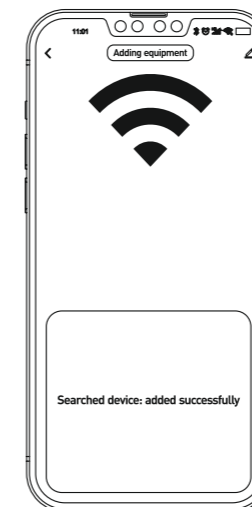

* The socket is connected to the internet successfully, the App page displays "Device added successfully"

* If there are multiple Core Smart Plug 10A for pairing, the phone will only select one of them for pairing. Because each IP address is different, there is no problem of duplicate models.

Attention

- Please do not disassemble, modify short-circuit products, otherwise it will cause electric shock, fire or electrical damage;
- This product is an electronic product, please avoid violently hitting, bumping or dropping the product;
- It is strictly forbidden to expose to excessive heat, cold or humidity. The best use environment temperature of the product is -10°C-40°C;

Please place it in a safe place out of reach of children to prevent danger;

Please use it for electrical products that have passed the national EMC certification to avoid potential safety hazards;

The memory mode or turning on the timing function should use the equipment with automatic protection function, or the device without automatic protection function can be used under artificial control.