


ATLANTIS® FLO-TANK® PRODUCT RANGE

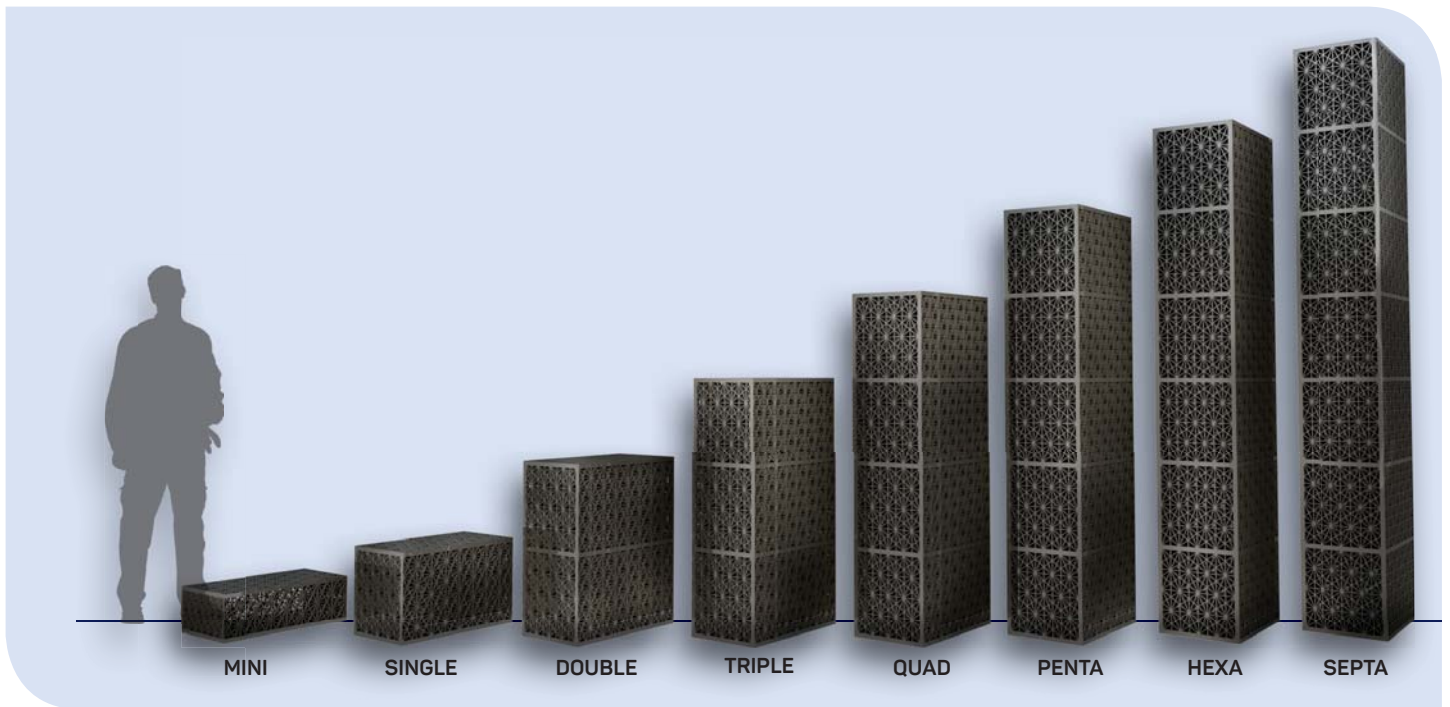

Product Name		MINI	SINGLE	DOUBLE	TRIPLE	QUAD	PENTA	HEXA	SEPTA
Part Number		70010	70003	70004	70005	70006	70007	70008	70009
Height	mm	240	450	880	1,310	1,740	2,170	2,600	3,030
	Inch	9.45	17.71	34.64	51.57	68.50	84.43	102.36	119.29
Gross Volume	Litre	67	126	246	366	486	607	727	847
	US Gal	17.70	33.28	65	96.69	128.39	160.35	192.05	223.75
Storage Capacity	Litre	63.72	119.48	233.65	347.81	461.98	576.15	690.32	804.48
	US Gal	17.2	31.56	61.72	91.88	122.04	152.20	182.36	212.52
Part Weight*	Kg	8	7.28	13.46	19.64	25.82	32.00	38.18	44.36
	Lbs	8.8	16.05	29.67	43.30	56.92	70.55	84.17	97.80
Modules per m3 (35.31 Ft3)		16	7.95	4.06	2.73	2.03	1.65	1.45	1.24
Maximum Flow Rate (per box)		5.9 L/Sec/m	11.5 L/Sec/m @ 1% gradient (3.038 US Gal/sec)						
Ultimate resistance**(Box)		Up to 18.2 Tonnes/m2	Up to 28 Tonnes/m2 (39.82 psi)						
Void Ratio		Volume Void: 95%				Surface Void: 70%			
Material		85 % Recycled polypropulene, 15% Atlantis Proprietary selected materials							
Colour		Black							
Chemical and Biological Resistance		Unaffected by moulds and algae soil-bourne chemicals, bacteria and bitumen							
Service Temperature		-30°C to 120°C (-22 F° to 248 F°)							
Approximate Material Lifespan		100 years + (Note: With underground tank installations)							

* Part weight estimated using 4 internal plate configuration.

**Ultimate resistance estimated using 9 internal plate configuration.

Note: Atlantis® Flo-Tank® products come in different internal plate configurations. Please contact Atlantis for the exact loading specifications.