

# THE DIMMER




Installation Manual

# TABLE OF CONTENTS

- 02 MATERIALS
- 03 STEP 1: GATHER YOUR TOOLS
- 04 STEP 2: TURN OFF POWER
- 05 STEP 3: REMOVE THE OLD SWITCH
- 06 STEP 4: IDENTIFY THE WIRES
- 07 STEP 5: TEST IF YOU DON'T HAVE A VOLTAGE METER
- 08 STEP 6: CONNECT THE WIRES
- 09 STEP 7: SECURE THE WIRES
- 10 STEP 8: MOUNT THE SMART SWITCH
- 11 STEP 9: TURN ON THE POWER
- 12 STEP 10: CONNECT THE SMART SWITCH TO WI-FI
- 13 STEP 11: TEST THE SMART SWITCH



# MATERIALS

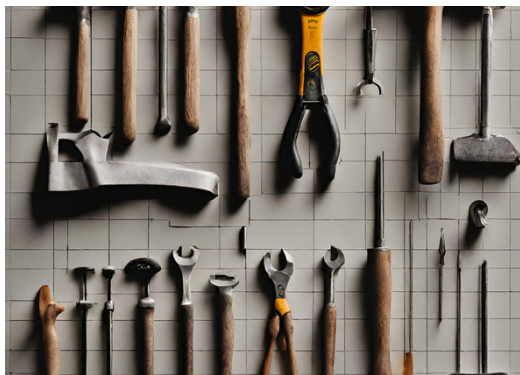

---

## **INCLUDED IN THE BOX:**

1X THE DIMMER SMART LIGHT SWITCH  
4X SCREWS  
4X WIRE CAPS

## **NOT INCLUDED IN THE BOX:**

1X SCREWDRIVER  
1X PLIERS  
1X WIRE STRIPPER



# STEP 1: GATHER YOUR TOOLS

---

BEFORE YOU START, MAKE SURE YOU HAVE THE FOLLOWING TOOLS AND MATERIALS:

- SCREWDRIVER
- PLIERS
- WIRE STRIPPERS
- WIRE CONNECTORS
- SMART LIGHT SWITCH
- INSTRUCTIONS FOR YOUR SPECIFIC SMART LIGHT SWITCH



Wire Connector




Wire Stripper

# STEP 2: TURN OFF THE POWER

---

1. LOCATE THE CIRCUIT BREAKER OR FUSE BOX FOR YOUR HOME.
2. IDENTIFY THE BREAKER OR FUSE THAT CONTROLS THE LIGHT SWITCH YOU WANT TO REPLACE.
3. SWITCH OFF THE BREAKER OR FUSE.



Breaker Box

# STEP 3: REMOVE THE OLD SWITCH

---

1. USE A SCREWDRIVER TO REMOVE THE TWO SCREWS THAT HOLD THE SWITCH PLATE IN PLACE.
2. GENTLY PULL THE SWITCH PLATE AWAY FROM THE WALL.
3. USE A SCREWDRIVER TO LOOSEN THE TWO SCREWS THAT HOLD THE SWITCH IN PLACE.
4. CAREFULLY PULL THE SWITCH OUT OF THE WALL BOX.




Switch Plate


# STEP 4: IDENTIFY THE WIRES

---

1. THERE ARE TYPICALLY THREE OR FOUR WIRES CONNECTED TO A LIGHT SWITCH:
2. HOT WIRE (USUALLY **BLACK**): CARRIES ELECTRICITY FROM THE BREAKER TO THE SWITCH.
3. NEUTRAL WIRE (USUALLY **WHITE**): CARRIES ELECTRICITY FROM THE SWITCH TO THE LIGHT.]
4. GROUND WIRE (USUALLY **GREEN** OR **BARE COPPER**): PROVIDES SAFETY PROTECTION.
5. IF THERE IS A FOURTH WIRE, IT MAY BE A TRAVELER WIRE, WHICH IS USED FOR THREE-WAY SWITCHES.

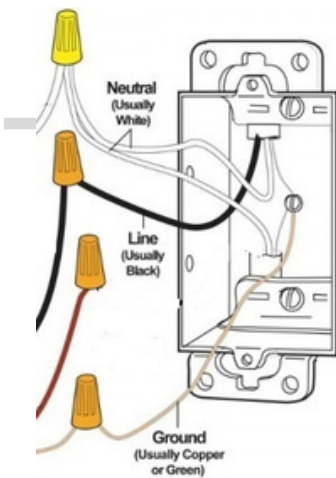

Three Wire

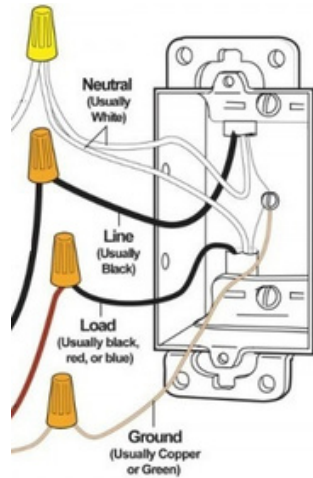

Four Wire

# STEP 5: TEST IF YOU DONT HAVE A VOLTAGE METER

---

- 1.TURN ON THE LIGHT CONTROLLED BY THE SWITCH.
- 2.IF THE LIGHT DOES NOT TURN ON, THE WIRES ARE NOT LIVE AND YOU CAN PROCEED WITH THE NEXT STEP.
- 3.IF THE LIGHT TURNS ON, THE WIRES ARE LIVE AND YOU SHOULD NOT PROCEED. YOU SHOULD HIRE A QUALIFIED ELECTRICIAN TO INSTALL THE SMART LIGHT SWITCH




Voltage Tester




# STEP 6: CONNECT THE WIRES

1. STRIP A SMALL AMOUNT OF INSULATION OFF THE END OF EACH WIRE.
2. CONNECT THE HOT WIRE FROM THE WALL BOX TO THE HOT WIRE ON THE SMART SWITCH.
3. CONNECT THE NEUTRAL WIRE FROM THE WALL BOX TO THE NEUTRAL WIRE ON THE SMART SWITCH.
4. IF THERE IS A GROUND WIRE, CONNECT IT TO THE GROUND WIRE ON THE SMART SWITCH.
5. IF THERE IS A TRAVELER WIRE, CONNECT IT TO THE TRAVELER WIRE ON THE SMART SWITCH.

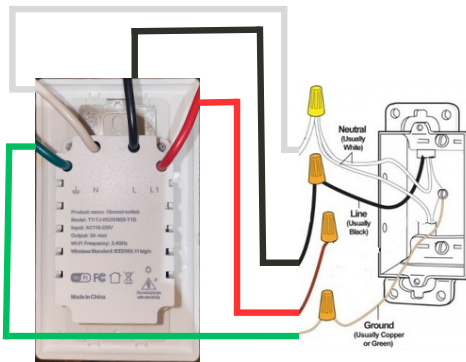

Four Wire Connection

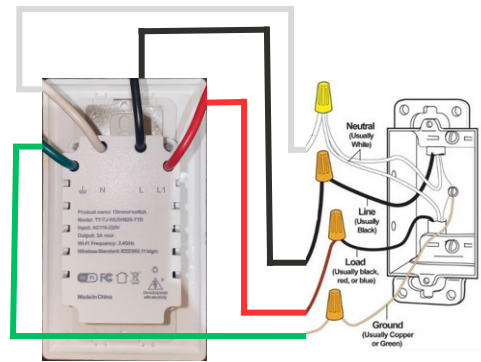

Three Wire Connection

# STEP 7: SECURE THE WIRES

---

1. USE WIRE CONNECTORS TO SECURE THE CONNECTIONS YOU JUST MADE.
2. MAKE SURE THE CONNECTIONS ARE TIGHT AND THERE ARE NO EXPOSED WIRES.




Wire Connector

# STEP 8: MOUNT THE SMART SWITCH

---

- 1.CAREFULLY PUSH THE SMART SWITCH INTO THE WALL BOX.
- 2.USE THE SCREWS PROVIDED TO SECURE THE SMART SWITCH IN PLACE.

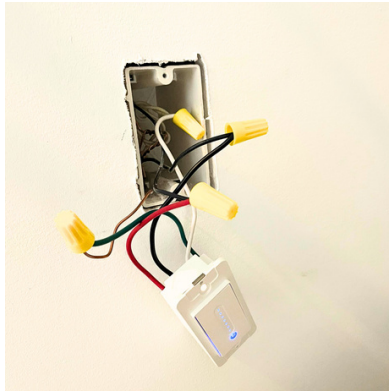

Smart Switch in Wall Box

# STEP 9: TURN ON THE POWER

---

1. RETURN TO THE CIRCUIT BREAKER OR FUSE BOX.
2. SWITCH ON THE BREAKER OR FUSE THAT CONTROLS THE LIGHT SWITCH.

# STEP 10: CONNECT THE SMART SWITCH TO WI-FI


---

1. DOWNLOAD THE **SMART LIFE APP** FOR YOUR SMART LIGHT SWITCH.
2. TAP THE ICON "+" ON THE TOP RIGHT IN THE HOMEPAGE
3. TAP "SWITCH (WI-FI)", AND ADD DEVICE
4. CHOOSE YOUR LOCAL WI-FI AND INPUT THE PASSWORD
5. ON THE SWITCH, PERFORM A LONG PRESS ON ITS BUTTON FOR ABOUT **5 SECONDS**, AND THEN THE INDICATOR WILL BEGIN BLINKING RAPIDLY.



Smart Life App


# STEP 10: CONNECT THE SMART SWITCH TO WI-FI

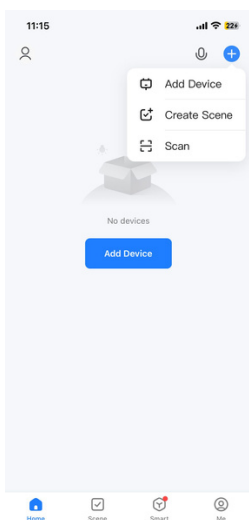

Step 2



Step 3

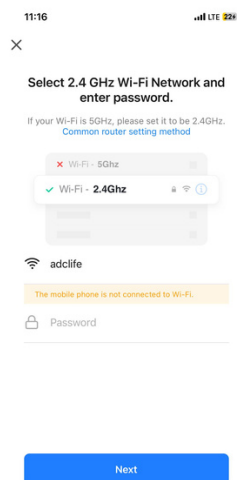

Step 4

# STEP 11: CONNECTING TO ALEXA

---

1. TURN THE SMART SWITCH ON AND OFF TO MAKE SURE IT IS WORKING PROPERLY.
2. YOU SHOULD ALSO BE ABLE TO CONTROL THE LIGHT SWITCH USING THE APP.



**Contact us for  
additional support!**



**[www.adclife.store](http://www.adclife.store)**



**[adc.life@outlook.com](mailto:adc.life@outlook.com)**