


LED Linear Suspension Light

User Manual

01 / WARNING


- Before beginning the installation, READ these instructions thoroughly.
- PLEASE check and make sure there are no signs of physical damage or missing accessories to the products when unpacking. DO NOT install and operate damaged products.
- Due to the risk of fire or electric shock, wire wall-mount installation of this product requires knowledge of electrical systems. If NOT qualified, DO NOT attempt the installation and contact a qualified electrician.
- PLEASE BEFORE ATTEMPTING ANY INSTALLATION OR SERVICING, TURN OFF THE POWER AT THE BREAKER BOX OR FUSE.
- Suitable for use in dry locations ONLY, DO NOT use in areas where water exposure occurs.
- DO NOT mount near gas or electrical heaters.
- The packaging contains small parts that can be swallowed by children.
- THESE LED LINEAR FIXTURES CAN BE JOINED TOGETHER AS NEEDED, BUT THE TOTAL NUMBER OF FIXTURES SHOULD BE NO MORE THAN 7 PCS (INCLUDING 7 PCS).
- ONLY power these LED linear lights from one wire if you install multiple fixtures in a series circuit.

02 / ACCESSORIES

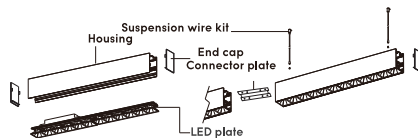

03 / INSTALLATION

Install Suspension Wires

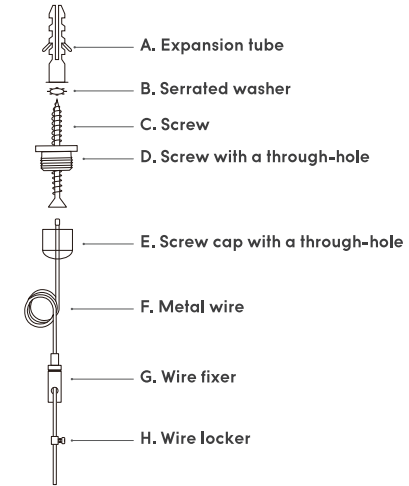

Step 1. Pass the metal wire (F) through the through-hole of the screw cap (E).

Step 2. Pass the wire through the wire fixer (G) from the pointed end and adjust the length of wire. Note: If you need the wire to be longer after retracting the wire, try pressing the pointed end of the wire fixer (G).

Step 3. Install the wire locker (H) to fix the wire tightly.

Step 4. Pass the screw (C) through the screw with a through-hole (D) and install it into the screw cap with a through-hole (E).

Step 5. Place the serrated washer (B) on the screw (C).

Step 6. Tighten the wire fixer (G) to the screw on the removable metal plate on the housing of the light fixture. Note: If you want to adjust the location of the removable metal plates on the light housing, unscrew the screw by the hex key.

Install Fixtures Separately

Step 1. Using measuring tape (not included), measure and drill holes into the ceiling with a drill (not included).


Step 2. Carefully tap the expansion tubes (A) into the holes with a hammer or rubber mallet.

Step 3. Connect the live wire in the ceiling to the live terminal; the ground wire to the ground terminal; the neutral wire to the neutral terminal.

Step 4. Install two expansion tubes onto the ceiling.

Step 5. Install the light fixture with the suspension wire kits into the expansion tubes (A).

Step 6. The installation is now complete.

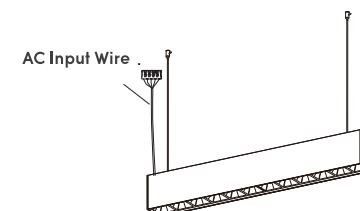

Install Fixtures in A Series Circuit


Step 1. Prise off the side black reflector that is far from the power cord of **Fixture 1** by using a screwdriver. Then unscrew the screws on the LED plate, take off the LED plate and plastic sheet. Last remove the end cap by unscrewing the screws on the fixture with the hex key.

Step 2. Remove the end cap near the power cord of **Fixture 2** as Step 1 mentioned. Pull out the male and female connectors. And then remove the power cord on **Fixture 2**.

Step 3. Put all the plastic sheets, LED plates and black reflectors to their original place.

Step 4. Install suspension wire kits into the ceiling and attach all light fixtures to the suspension wire kits.

Step 5. Connect **Fixture 1** and **Fixture 2** by male and female connectors.

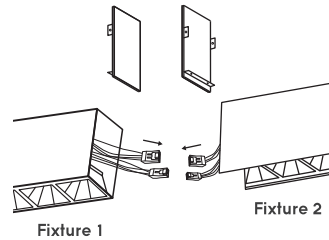


Step 6. Repeat Step 2 to Step 5 until all the fixtures are installed to the suspension wire kits.

Step 7. Install the connector plate(s) by screws to stabilize the connection between fixtures.

Step 8. Connect **Fixture 1**'s live wire in the ceiling to the live terminal; ground wire to the ground terminal; neutral wire to the neutral terminal.

NOTE: DO NOT CONNECT THE POWER CORD ON THE LAST LIGHT FIXTURE TO ELECTRIC CIRCUIT.



04 / WARRANTY

LeonLite warrants that this product is free from defects in materials and workmanship for a period of 5 years from the day of purchase. This warranty does not apply if the product has been damaged through misuse, abuse, accident, modifications, alterations, neglect or mishandling.

LeonLite