

50W Outdoor Area Light

User Manual

01 / PACKAGE CONTENT

50W outdoor area light × 1


Wire nuts × 3

02 / WARNING


- READ ALL INSTRUCTIONS CAREFULLY BEFORE ATTEMPTING TO INSTALL THIS FIXTURE. RETAIN THE INSTRUCTIONS FOR FUTURE REFERENCE.
- TURN OFF THE POWER before installing or servicing this fixture. This fixture must be wired in accordance with the National Electrical Code and all applicable local codes and ordinances.
- ALL wiring should be performed by a qualified electrician. This fixture is for outdoor use and should NOT be used in areas with limited ventilation or have high ambient temperatures.
- Before installing this fixture, PLEASE check if it was damaged during transportation. If ANY damage is shown, PLEASE DO NOT install or use this fixture.
- The product itself and all its components should NOT be mechanically stressed.
- The installation MUST NOT damage or destroy conducting paths or other parts of this product.
- The installation of LED products (with power supplies) must be done with regards to all applicable electrical safety standards. ONLY qualified personnel should be allowed to perform installations.
- Correct electrical polarity needs to be observed. Wrong polarity MAY damage or destroy LED products.
- ALL LEDs are static sensitive. Precautions should be taken to ensure that LEDs are well protected from ESD during handling, even though the chips are safe in low static-electric discharge events.
- DO NOT operate LEDs in reverse bias.
- Electrical connections should be kept in a dry area unless adequately sealed.
- This product series emits a high light output. DO NOT EVER look directly into the light emitting area while in use. Direct exposure to the light over an extended period of time may harm your eyes.
- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer, their service agent or a similarly qualified person in order to avoid a hazard.

03 / INSTALLATION


1. TURN OFF THE POWER, then with a screwdriver unscrew the cover from the junction box (not included).

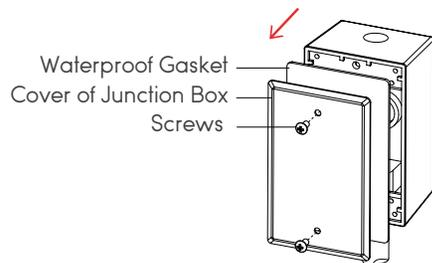


2. Pass the lamp wires through the hole of the junction box.

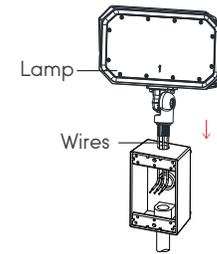


3. Screw the knuckle mount into the junction box.

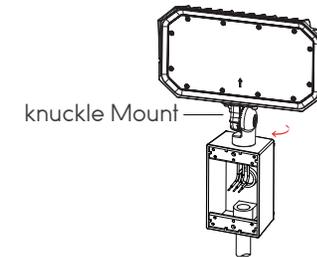

4. Using the wire nuts, connect the wires in the junction box. Connect the ground wire to the green wire; the live wire to the black wire; the neutral wire to the white wire.

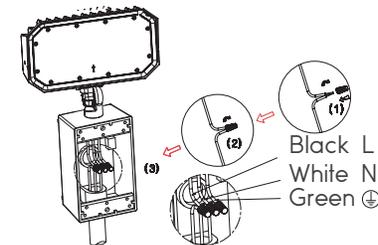


5. Use the screwdriver to screw back on the junction box cover.

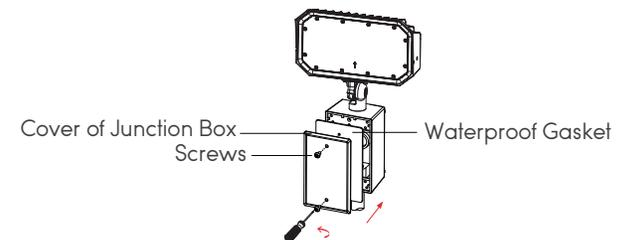

6. To adjust the angle of the lamp, unscrew the screw on the side of the knuckle mount with a screwdriver, then rotate the knuckle mount to the desired angle. Then fasten the screw after you are finished adjusting. Turn the power back on, the installation is now complete.

Note: The lamp has an adjustable angle of 180 degrees.

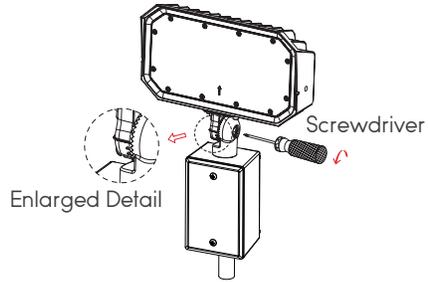

04 / SPECIFICATIONS

50W Outdoor Area Light	
Working temperature	-40°F-113°F
Lifespan	50,000hrs
Waterproof rating	IP65
Voltage	AC120-277V
Equivalent	400W
Color temperature	5000K Daylight
Power rating	50W

05 / WARRANTY

LEONLITE warrants that this product is free from defects in materials and workmanship for 5 years from the day of purchase. If the product has been misused, damaged by accident or in any other way of improper use, this warranty becomes void.

LeonLite