



LED INDICATOR

Mode	Indicator
Power On	Blue LED flash 3 times to power on unit.
Power Off	Red LED flash 3 times then power off the unit.
Pairing	Blue and Red LED flashing alternately
Unconnected Standby	Blue LED flash 2 times every 2 seconds
Connected Standby	Blue LED flash 3 times every 8 seconds
Music Playing	Blue LED flashes 1 time every 6 seconds
Active Call	Blue LED flash 1 time every 6 seconds
Mic Mute	Red LED flash 1 time every 6 seconds
Charging	Red LED is steady on
Fully Charged	Blue LED is steady on
Low Battery	Red LED flash 2 times every 2 seconds

CHARGING THE HEADSET

NOTE: It is highly recommended that you fully charge the headset overnight (8-10 hours) before first-time use, or if headset has not been used for more than 21 days.

1. Plug the Micro end of cable into the charging port of the headset.
2. Plug the Type A end of cable into a computer or laptop's USB port, or a USB Type A charging block (not included).
3. Do not use the headset while charging.

HEADSET STORAGE AND CARE

- Only use original included accessories with this device.
- Use clean, soft, static-free cloth to clean headset surfaces.
- Store headset away from dust, heat and water.
- Do not store headset or chargers in extreme environments.
- Do not allow children to use headset unsupervised.

This device complies with Part 15 of the FCC Rules. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a installation. If this equipment does cause harmful interference to radio or television reception which can be determined by turning the equipment on and off, the user is encouraged to try to correct the interference by one or more of the following:

- Reorient or relocate the receiving antenna.
- Increase separation between equipment and receiver.
- Connect equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for assistance.

TROUBLESHOOTING

- Ensure that the Bluetooth function on the device is enabled.
- Ensure that DELTON 10X is shown as connected and paired with your device.
- Ensure that the default audio input / output on your device is set to the DELTON 10X.
- Ensure the range between the headset and the paired device is less than 30 feet (9 meters), and that there are no disturbances or electrical devices between the headset and the paired device.
- Check if the indicator light signals low battery and recharge as needed.
- Disable your pop-up blocker. If using a browser-based service like Google Meet or Slack browser app, pop-up blockers can prevent the browser's microphone permission request from displaying.

WARRANTY

Delton warrants this product against defects in material and/or workmanship under normal use. To view our warranty policy or to submit a claim, please visit overtimebrands.com/pages/warranty-information.

LEGAL WARRANTY

The period of guarantee and any other conditions relating to it, is governed by the legislation of the country where the product was purchased.

1 YEAR WARRANTY Register your product at overtimebrands.com

SPECIFICATIONS


Frequency Range:	2.40Ghz-2.48Ghz	Stand By:	Up to 160 Hours
RF Sensitivity:	≥-75dBm	Talk Time:	Up to 15 Hours
BT:	V5.2	Play Time:	Up to 18 Hours
Operation Range:	Up to 33ft	Charging Time:	1.5 Hours
Works With:	iOS, Android, Windows		

WHAT'S IN THE BOX?



10X WIRELESS HEADSET

WITH NOISE CANCELING MICROPHONE

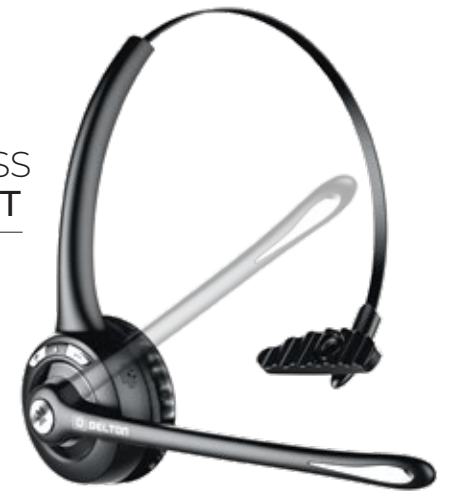

USER MANUAL

THANK YOU FOR PURCHASING THE DELTON 10X WIRELESS HEADSET

Please take a moment to read this user manual thoroughly, and keep it for future reference. This manual explains the features and functions of this product.

PRODUCT DESCRIPTION



(MFB) Multi-Functional Button
(Power, Answer, End Call, Redial, Play, Pause)

PAIRING TO ONE DEVICE

NOTE: Make sure the headset is turned off.

1. Press and hold the multifunction button for 5-6 seconds until you hear a voice prompt "pairing" and the indicator light alternates between blue and red. This indicates that the headset is in pairing mode.
2. Navigate to the Bluetooth screen on your device and make sure Bluetooth is turned on.
3. On your device's Bluetooth screen, find the DELTON 10X from the list of devices available to connect with.

NOTE: If asked for a pin, enter "0000".

NOTE: If your device does not automatically pair, select the DELTON 10X from your list of Available Devices to pair.

4. You will hear a voice prompt "your device is connected" and it will flash blue to indicate it has completed pairing.

PAIRING TO TWO DEVICES

NOTE: This headset contains a dual-link function for connecting with two Bluetooth enabled devices simultaneously.

1. Pair the first device following the steps above.
2. Temporarily turn off the first connected device's Bluetooth.
3. Pair the second device using the steps above.
4. Turn off the DELTON 10X headset.
5. Turn on the first device's BT.
6. Turn on the DELTON 10X headset. The headset will re-connect to both devices automatically.

GENERAL FUNCTIONS

Power

Turning On:	Press and hold MFB for 5 seconds
Turning Off:	Press and hold MFB for 5 seconds

Wireless Connectivity

Clear Pairing:	When headset is ON, hold down the MFB and "V+" button for 3 seconds.
----------------	--

Playback

Play/Pause:	Press MFB
Previous Track:	Long press V-
Next Track:	Long press V+

Volume Control

Raise Volume:	Press V+
Lower Volume:	Press V-

CALL FUNCTIONS

Answer Call:	Short press MFB to answer an incoming call
End Call	Short press MFB to hang up the call
Reject Call	Long press MFB for 1 second to reject incoming calls
Mute Mic:	Hold the V- button for 2 seconds
Mic On (Unmute):	Hold the V- button again for 2 seconds
Redial Last Number:	Double click MFB to redial the last dialed phone number (when phone is in standby or playback mode).
Three-Party Call:	Double click MFB to hold the current call and connect to the new call. Double click MFB again to switch between the reserved call and the current call (short pressing will end the call)

Power Saving Functions

Automatic Shutdown: Automatically shuts down when there is no connection for more than 30 minutes.