



Savox Promate RSM

- 1. Volume + button increase volume
- 2. Volume button decrease volume
- 3. Multifunction (MF) button Power on/off, pairing, answer/end/reject calls
- 4. USB charger connector
- 5. Audio connector
- 6. Microphone
- 7. Push-To-Talk button

- 8. Indicator light status indication (blue, red, green, purple and yellow)
- 9. Speaker
- 10. Clothes clip



Product Instructions

Power on

- When the device is off, press and hold the MF button for 2 seconds.
- Purple light flashes once and the device turns on.
- **When powered on for the first time, the device goes to pairing mode automatically.

Power off

- When the device is on, press and hold the MF button for 3 seconds.
- Purple light flashes once and the device turns off.

Pairing

- When the device is off, press and hold the MF button for 5 seconds.
- Blue and red light flash alternately.
- To complete the pairing, follow the instructions in your radio or mobile phone user guide.
- » Select "Savox BTR-155 a" and use the passcode 0000.

PTT calls

Press and hold the PTT button to make a PTT calls.



Product Instructions

Light indicators

Savox Promate RSM uses a Tri-color LED light (blue, red and green). It shows as purple when blue and red turn on at the same time. Different light combinations represent different statuses.





Connected: Blue light flashes



Pairing mode: Blue & red light flash alternately.



Active phone call: Green light flashes.



Battery low: Yellow light flashes.



Charging battery: Red light on.



Charging completed: Red light turns off.



Powering off:

Purple light flashes once. Device turn off.






Product Instructions

Pair the unit to your handset following the instructions in your mobile phone user guide.


Once paired, within ESChat's setting make the following changes:



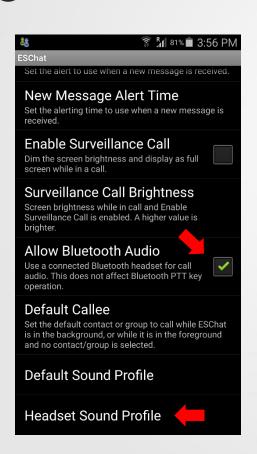




Select the Headset Sound profile and Headset Type:

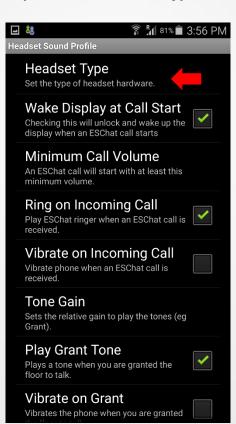



Select Bluetooth w/ PTT:

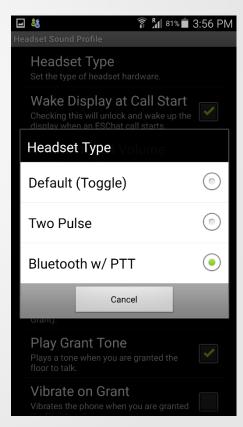



5aVYou're never alone