Hospitality Indoor Wi-Fi 6 (802.11ax) 2x2:2 Wireless Access Point





#### Wi-Fi as-a-Services – Industry 1<sup>st</sup>

- Zero CAPEX Subscription Model
- Unlock client resources.

### **KEY FEATURES**

#### Radio Technology

- 802.11ax 5 GHz 2x2:2 (2,401<sup>1</sup> Mbps)
- 802.11ax 2.4 GHz 2x2:2 (574<sup>2</sup> Mbps)

Maximum combined data rate of 2.976<sup>3</sup> Gbps for high performance even with high bandwidth, low latency application.

#### Wired Connectivity

- 1 x 100/1,000Mbps auto-sensing uplink speed Ethernet POE+ port
- 1 x 100/1,000Mbps auto-sensing downlink speed Ethernet port POE-OUT
- 3 x 100/1,000Mbps auto-sensing link speed Ethernet port
- 1:1 x pass-through RJ45 port,
- 1 x console port,
- 1 x USB2.0 charger port,

# Management, Controller. Reporting and Al Machine learning.

- NB 9X80 Series On-Premises Controller
- NB Cloud Managed Controller Standard or Premium
- NB Internet Access Management Gateway
- Simplified Deployments and Provisioning
- Advanced Reporting and Network Insight

#### Security

- Support WPA3 and Enhanced Open
- Support Client Isolation
- Privacy VLAN Isolate From Potential Hackers

Newbridge Wi-Fi 6 wall mount access point equipped with Qualcomm's latest chipset and feature AX technology.

#### INTRODUCTION

The NEWBRIDGE AP622-WP specific designed for closed in-room wireless access to delivers secure Wi-Fi connectivity for hotel guest room, hostels and any rooms that's required robust connectivity. It's overcome the fire-rate and soundproof rated door that restricted wireless signal weak from ceiling AP at corridor.

AP622-WP built-in MU-MIMO 2x2:2 spatial stream, both 2.4 GHz and 5GHz has a two-antenna configuration -- with two transmitters and two receivers -- and can support two concurrent spatial streams on each radio frequency.

Powered up by single uplink port RJ45 UTP POE+ through any POE+ Switches and 1-port downlink to POE devices such as IP Phone or any POE supported IoT devices, additional 3-port downlink for PC/Iaptops, IPTV or IoT device not required POE. An Extra pass-through port allow analog phone connection and 1port USD charger for smart phone. These combination port give greater flexibility to Property Owner/Hotel Operator to provide lower cost deployment by saving extra cabling cost to the room that provide more IP devices connection required.

MU-MIMO allows for an AP to serve multiple users at the same time and on the same frequency (in the case of DL MU-MIMO), or for multiple users to transmit to a single AP at the same time and on the same frequency (in the case of UL MU-MIMO). MU-MIMO works because APs generally have more antennas compared to clients (e.g., cell phones or laptops).

Indoor Wi-Fi 6 (802.11ax) Access Points

Hence it allows the AP to utilize its additional antennas to transmit to or receive from multiple clients simultaneously. Both DL and UL MU-MIMO require complex signal processing, especially on the AP side, which is generally feasible due to its higher capabilities.

A Wi-Fi Alliance whitepaper, *Wi-Fi CERTIFIED 6: A New Era in Wireless Connectivity, September 2019*, succinctly describes MU-MIMO technology, and DL MU-MIMO in particular, as follows:

Multi-user multiple input, multiple output (multi-user MIMO) allows more downlink data to be transferred at one time, enabling access points (APs) to concurrently handle more devices.

Downlink multi-user MIMO allows higher throughput in environments with devices containing a limited number of antennas by multiplexing their transmissions in the spatial domain. Introduced in 802.11ac to support up to four users simultaneously, Wi-Fi 6 extends multi-user MIMO and doubles the number of devices that can be supported efficiently to eight users. Together with downlink OFDMA, which operates in the frequency domain, this feature permits a Wi-Fi 6 AP to schedule downlink multi-user transmissions across spatial streams or frequencies.

Similarly, UL MU-MIMO allows multiple clients to transmit their data simultaneously to an AP, typically with large payloads of data and applications with high speed requirements. Typical use cases include live video streaming such as Facebook Live, content sharing on social media, video conferencing (e.g., Zoom or Microsoft Teams), large file uploads, and online gaming.

Features include Orthogonal frequency-division multiple access (OFDMA), and cellular optimization provides groundbreaking wireless capabilities for budgetconscious deployments. Orthogonal frequency-division multiple access (OFDMA) can split bandwidth across several clients within a single channel access, bringing finer granularity to scheduling decisions in a dense network.

Joining MU-MIMO as a core multi-user feature that defines Wi-Fi 6. OFDMA simultaneously serves multiple users during one transmission by splitting the available bandwidth into multiple groups of subcarriers called resource units (RU).

The numbering of MU-MIMO furthers derive in 1x1, 2x2, 3x3, 4x4 etc.. These numbers represent simultaneous spatial streams it can support. The high number of antennas in wireless AP, the faster access speed and higher numbers of clients access simultaneously. It's explained as AP capacity.

With a maximum concurrent data rate of 2,402 Mbps in the 5 GHz band and 574 Mbps in the 2.4 GHz band, the AP622-WP delivers high-performance Gigabit Wi-Fi in the industry.


AP622-WP designed and built using Qualcomm Technologies. The analyses highlight the significant performance advantage in various scenarios where Qualcomm Technologies' MU-MIMO throughput can reach as high as 2.5x the competitor's chipset's throughput. According to Qualcomm Technologies, Inc. (QTI) San Jose, January 2022, published documentation: *"The Benefits of MU-MIMO for Wi-Fi 6 "* 

Client roaming can be navigated through the rejection of weak signal access and reconnection trigger for clients. Rejection of weak signal access can effectively prevent the access of clients with weak signals further guiding the client to associate to a stronger RF signal.


Indoor Wi-Fi 6 (802.11ax) Access Points

### **ACCESS POINT ANTENNA PATTERN**

Horizontal planes (top view)




5.5 GHz Wi-Fi



Average Downtilt

Vertical (elevation) planes (side view, AP facing down)

Showing side view with AP rotated 0 and 90 degrees

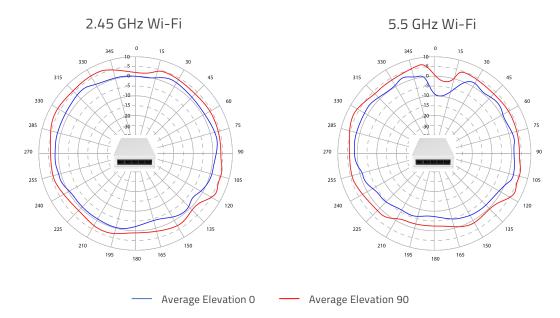

Indoor Wi-Fi 6 (802.11ax) Access Points

2.4GHz - RF PERFORMANCE TABLE				
BAND, rate	Maximum Transmit Power (dBm) Per transmit chain	Maximum Transmit Power (dBm) 2 chains	Receiver sensitivity (dBm) Per receive chain	
2.4GHz, 802.11	2.4GHz, 802.11b			
1Mbps	20	23	-87	
11Mbps	20	23	-80	
2.4GHz, 802.11	2.4GHz, 802.11g			
6Mbps	20	23	-87	
54Mbps	17	23	-67	
2.4GHz, 802.11	n HT20			
MCS0	19	23	-87	
MCS7	16	22	-67	
2.4GHz, 802.11	n HT40			
MCS0	19	23	-87	
MCS7	16	22	-64	
2.4GHz, 802.11	2.4GHz, 802.11ax HE20			
MCS0	19	23	-87	
MCS11	14	18	-55	
2.4GHz, 802.11ax HE40				
MCS0	19	23	-87	
MCS11	14	18	-50	

5GHz - RF PERFORMANCE TABLE			
BAND, rate	Maximum Transmit Power (dBm) Per transmit chain	Maximum Transmit Power (dBm) 2 chains	Receiver sensitivity (dBm) Per receive chain
5GHz, 802.11a			
6Mbps	20	23	-87
54Mbps	17	23	-69
5GHz, 802.11n	/ac/VHT20		
MCS0	20	23	-87
MCS9	17	21	-68
5GHz, 802.11n	5GHz, 802.11n/ac/VHT40		
MCS0	20	23	-84
MCS9	16	21	-59
5GHz, 802.11n	/ac/VHT80		
MCS0	20	23	-84
MCS9	16	21	-55
5GHz, 802.11a	x HE20		
MCS0	17	23	-87
MCS11	14	18	-56
5GHz, 802.11a	x HE40		
MCS0	17	23	-83
MCS11	14	18	-52
5GHz, 802.11ax HE80			
MCSO	17	23	-81
MCS11	14	18	-50
5GHz, 802.11a	5GHz, 802.11ax HE160		
MCS0	17	23	-78
MCS11	14	18	-47

<sup>1</sup> Use of WiFi 6 (802.11ax) and its features, including OFDMA, HE160, and 1024-QAM, require clients to support the corresponding features. The 160 MHz bandwidth is only available on the 5 GHz band. It may be unavailable in some regions/countries due to regulatory restrictions. The double channel width refers to 160 MHz compared to 80 MHz for general WiFi6 APs.

<sup>2</sup> Use of WiFi 6 (802.11ax) and its features, including OFDMA, HE40, and 1024-QAM, require clients to support the corresponding features.

<sup>3</sup> Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 specifications. Actual wireless data throughput and wireless coverage are not guaranteed and will vary as a result of 1) environmental factors, including building materials, physical objects, and obstacles, 2) network conditions, including local interference, volume and density of traffic, product location, network complexity, and network overhead, and 3) client limitations, including rated performance, location, connection, quality, and client condition

Indoor Wi-Fi 6 (802.11ax) Access Points

Wi-Fi Radio Specifications	
Wireless Standards	• IEEE 802.11a/b/g/n/ac /ax
Supported Rates	<ul> <li>802.11ax: 4 to 2,401 Mbps</li> <li>802.11ac: 6.5 to 574 Mbps</li> <li>802.11n: 6.5 to 600 Mbps</li> <li>802.11a/g: 6 to 54 Mbps</li> <li>802.11b: 1 to 11 Mbps</li> </ul>
Supported Channels	<ul> <li>2.4GHz: 1-13</li> <li>5GHz : 36-64, 100-144, 149-165</li> </ul>
МІМО	<ul> <li>2x2 MU-MIMO (Backward compatible to SU-MIMO for older devices)</li> </ul>
Spatial Streams	• 2SS for MU-MIMO on both radios
Channelization	• 20, 40, 80, 160 / (80+80)MHz
Modulation Techniques	• OFDM: BPSK, QPSK, 16-QAM, 64- QAM, 256-QAM, 1024-QAM
Security	• WPA-PSK, WPA-TKIP, WPA2 AES,WPA3, 802.11i, Dynamic PSK

PERFORMANCE AND CAPACITY		
Peak PHY Rates	<ul> <li>2.4GHz: 574<sup>2</sup> Mbps</li> <li>5GHz : 2,401<sup>7</sup> Mbps</li> </ul>	
Maximum Stations Capacity	<ul> <li>Support up to 256<sup>4</sup> associated client devices per radio or 512 associated client per AP concurrently</li> </ul>	
BSSID	• Up to 32 per AP	

<sup>4</sup> Each AP622-AP provides connectivity for a maximum of 256 associated clients per radio (512 in total). In real-world scenarios, the maximum recommended client density is dependent on environmental conditions.

RF	
Antenna Type	<ul> <li>omni antenna for 2.4 GHz</li> <li>omni antenna for 5 GHz</li> <li>Vertical polarization</li> </ul>
Antenna Elements	• 2 elements for 2.4 GHz band and 2 elements for 5 GHz band
Antenna Gain (max)	• Up to 3 dBi
Transmit Power (EIRP), Subject to local authority approval	<ul> <li>2.4 GHz at 23 dBm</li> <li>5 GHz at 23 dBm</li> </ul>
Frequency Bands	• 20, 40, 80, 160/80+80MHz
Receiver Sensitivity, min.	• -95 dBm
Frequency Bands	<ul> <li>ISM (2.4-2.484GHz)</li> <li>U-NII-1 (5.15-5.25GHz)</li> <li>U-NII-2A (5.25-5.35GHz)</li> <li>U-NII-2C (5.47-5.725GHz)</li> <li>U-NII-3 (5.725-5.85GHz)</li> </ul>

PHYSICAL	
Ethernet Interface	<ul> <li>1 x 10/100/1000 Mbps auto- negotiation Power Over Ethernet (PoE) port, RJ45</li> <li>1 x 10/100/1000 Mbps auto- negotiation Ethernet port, RJ45 POE- out</li> <li>3 x 10/100/1000 Mbps auto- negotiation Ethernet port, RJ45</li> <li>1:1 x pass-through port, RJ45</li> <li>1 x USB 2.0 Type A, 5V</li> <li>1 x Console port, RJ45</li> </ul>
Power Supply	• IEEE 802.3at+ (48V)
Dimensions	Height (H): 160 mm, Width (W): 86 mm, Depth (D) 29 mm
DC Jack	• Yes (12VDC: 12V—1.5A)
Power Consumption	• < 35W
Weight	• 0.770 kg
Operating Temperature	<ul> <li>Working Temperature: -20°C to 45°C</li> <li>Storage Temperature: 0°C to 70°C</li> </ul>
Operating Humidity	<ul><li>Working Humidity : 5% to 95%</li><li>Storage Humidity : Max. 90%</li></ul>
NETWORKING	
Operating Mode	<ul><li>Controller-managed</li><li>Standalone</li></ul>
IP	• IPv4, IPv6, dual-stack
VLAN	<ul><li>VLAN Pooling</li><li>Port-based</li></ul>
802.1x	Authenticator & Supplicant
Roaming	• Yes

ORDER INFORMATION		
NB-AP622-WP	<ul> <li>Newbridge AP622-WP Wi-Fi 6</li> <li>Ceiling Mount Wireless Access Point, 2x2:2 (2.4GHz) and 2x2:2 (5GHz)</li> </ul>	
NB-AP622WP-SU-1Y	<ul> <li>Newbridge AP622-WP Hardware and Software Support -1Y</li> </ul>	
VC-AP622WP-RPL- 1Y	VCARE AP622-WP NBD AHR, HW & SW     SUPPORT, 1Y	

CE markings to indicate that a product complies with European Union (EU) regulations and directives regarding health, safety and environmental protections. CE marking also have implications for obtaining full RoHS Compliance.



Newbridge logo is in various countries worldwide registered trademarks of Newbridge Technologies International Limited. Corporate Office: 1410 40 Ave NE #19, Calgary, AB T2E 6L1.

All other company and product names may be trademarks of their respective companies.

All specifications are subject to change without notice.

Contact Us at www.newbridge-tech.com/contact-us

CE

RoHS compliant