

**Congratulations on the purchase of your Premium Pop-Up Display.**

## Owner's Manual

- Includes:  
 Parts List  
 Assembly Instructions  
 Disassembly Instructions  
 Storage Instructions  
 Care Instructions  
 Warranty Information


Please read all of the information carefully and contact your distributor or supplier with any questions.




## Parts List

**Important:** Before you begin please count and inspect all pieces.

- 1- 12-quad Curved Frame (A)
- 2- 3-quad Straight Frame (B)
- 33- Magnet Bars (C)
- 2- Hardware Bag (D)
- 2- Double LED Light Kit (E)
- 2- Universal LED Light Clip Kit (F)
- 4- Curved Mural Center Panels (G)
- 2- Straight Mural Center Panels (H)
- 2- Curved Mural End Panels (I)
- 2- Straight Mural End Panels (J)
- 2- Fabric Case-to-Counter Kit (K)
- 2- Oval Shipping Case w/wheels (L)

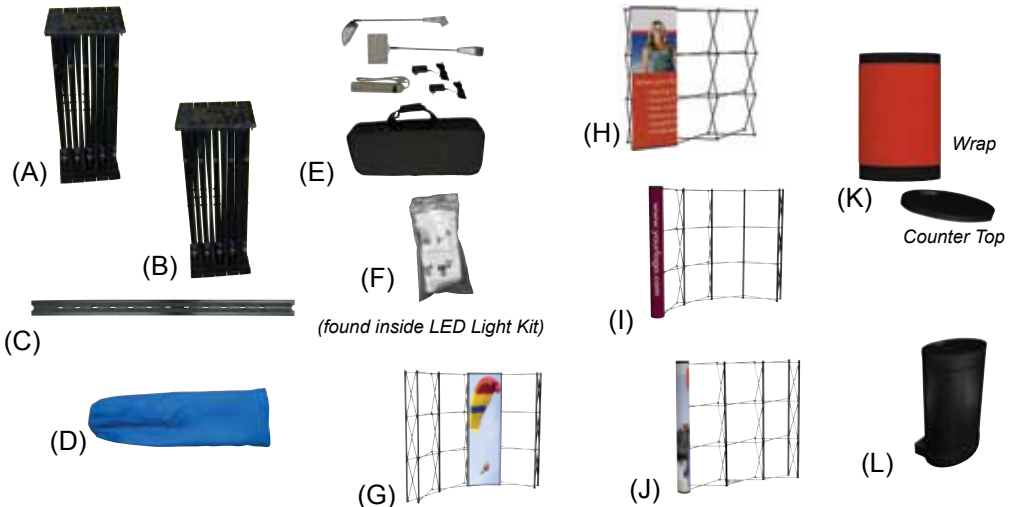


## Assembly Instructions



### Step 1

Remove frames (A & B) from case. Standing in front or behind expand the frames (A & B) by pulling up from the middle of the frame. Arrange them left to right: 3-quad straight frame (B), 12-quad curved frame (A), 3-quad straight frame (B).

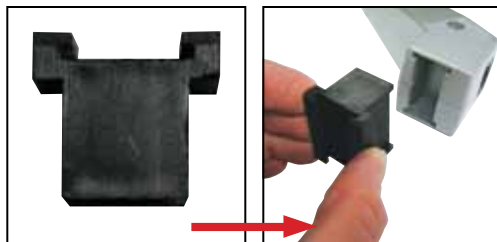

### Step 2


Select the Universal LED Light Clip, item # 150045, (F) and insert into the base of LED Lights (E).



### Step 3

Plug power cord from the light kits into base of lights (E). Then slide lights (E) with clip attachment inserted, onto light clip on the top of the frames (A & B). If you cannot locate the light clips on the frame, check to make sure the frames are not upside down. Repeat for each light and finished expanding frames.

## Assembly Instructions (cont.)





### Step 4

Secure the stability of the unit by engaging the MAGNAFORCE™ locking bars into place.



### Step 5

Beginning at the bottom and working up, attach the magnet bars (B) by aligning the cut-outs on the bars with the center of the hub on the frame (A). They will snap into place. Apply to the front, and the two back corners of the outer 3-quad frames (B).



### Step 6

Remove panels from protective sleeve. NOTE: Place sleeves in shipping case. They will be used for storage. Hang the panels from the hanging pins at top, then attach them to the magnet bars (C) by aligning the magnetic strips.

**See images below for panel placement.**




FIGURE 6.1

Curved  
Center Panels




FIGURE 6.2

Straight  
Center Panels




FIGURE 6.3

Straight  
End Panels

### Panel Placement

Start with the curved center panels (G), hang them on the curved frame (A), (Fig. 6.1) Hang the straight center panels (H) on each straight frame (B), (Fig. 6.2). Use the straight end panels (J) to connect the curved frame (A) to each of the straight frames (B), (Fig. 6.3).



### Step 7

Hang the curved end panels (I) last. Curl them around the corners and attach them to the magnet bars (C) in front and in back.



### Step 8

Plug lights (E) into power source and turn the switch on.



### Step 9 (Case-to-Counter Kit)

Place the wrap part of the case-to-counter kit (K) around the oval shipping case (L) and secure with Velcro®. Place the oval counter top part of the case-to-counter kit (K) in the groove on top of the shipping case (L). Repeat for second case-to-counter kit.

## Disassembly Instructions



### Step 1

Remove all panels and carefully roll them up **fabric/graphic side out** into clear protective sleeves.



### Step 2

Carefully place rolled panels in shipping cases (L), **fabric/graphic side out**. Roll panels so they are along the perimeter of case.



### Step 3

Remove all magnet bars (C) from frames (A & B), and place in hardware bags (D).



### Step 4

Disengage the locking bars (see Assembly Step 4). Retract the frames half way and remove lights (E) before fully retracting the frame. Leave clip attachment in light, for quick set-up next time. Repack the lights in foam lined carrying cases.



### Step 5

Fully retract frames and place them, along with the light cases and hardware bags (D), in the open center area inside the shipping cases (L).

## Storage Instructions



Store in shipping cases (L), in a cool, dry place.

## Care Instructions

Spot clean with damp cloth.

## Warranty Information

All products are designed to provide the user with a cost-effective and durable product. Standard warranty is a 'one year parts and labor' warranty which warrants product against defects in material and workmanship. It does not cover damage due to accidents, abuse, or normal wear and tear. Products found to be defective will be replaced or repaired at factory's discretion. Lifetime warranty on frame and hardware.