


# W320TN

True Wireless Noise Cancellation Earbuds Headphones

## Manual



### EN 1. Power ON/OFF



1. Power ON when the case is opened.
2. Power OFF when placed in the case and the case is closed.

**Note:**  
If the earbuds does not pair with new device once power on, they will turn off automatically after 10 minutes; if the earbuds does not reconnect to the connected device once power on, they will turn off automatically after 120 minutes.

### 2. Pairing



1. Earbuds placed in the case and keep the case open.
2. Press and hold the button on the case for about 3s. White and green LEDs will blink alternately.
3. Select "EDIFIER W320TN" in your device setting to connect. White LED will blink once and then turn off when successfully.

#### 1st Pairing

1. Earbuds placed in the case and keep the case open. White and green LEDs will blink alternately.
2. Select "EDIFIER W320TN" in your device setting to connect. White LED will blink once and then turn off when successfully.

#### Fast Pair(Phone with Android 6.0+)

Open the charging case and keep the case next to the phone(make sure the phone is unlocked and Bluetooth® is on), and tap the pairing notification when the pop-up window appears to connect effortlessly.

**Note:**  
For subsequent use, the earbuds will automatically connect to the device used last time.

### 3. Reset



1. Earbuds placed in the case and keep the case open.
2. Press the button on the case 3 times to re-enter left & right connection and clear the Bluetooth pairing records, white LED will blink slowly.
3. Select "EDIFIER W320TN" in your device setting to connect. White and green LEDs will blink alternately, then white LED will blink once and turn off when successfully.

### 4. Dual-device connection


1. Pair device A with the earbuds. Upon success, keep the earbuds in the case and keep the case open, then press and hold the button on the case for about 3s to re-enter the Bluetooth pairing mode, and device A is disconnected from earbuds.
2. Select "EDIFIER W320TN" in device B to connect successfully.
3. Select "EDIFIER W320TN" in device A to connect manually. White LED will blink once and then turn off when 2 devices connected successfully.

- Note:**
1. When a call comes, the earbuds will automatically switch to the calling device. After the call ends, the earbuds can switch back to the original device.
  2. Voice assistant can be enabled on the latest active smartphone if two smartphones are paired with the earbuds simultaneously.
  3. Switching from device to device, pause music on the current device, and start playing audio on the second device you would like to switch to.
  4. Each time when powered on, the earbuds will automatically reconnect with the two most recently-connected devices if available within the effective Bluetooth range.

### 5. Auto-pause music

Remove one or both earbuds while listening to music, the music will automatically pause; to resume the music, insert the earbud(s) back in the ear(s). This function can be disabled or configured in "wearing detection" settings via Edifier Connect App.

### 6. Charge

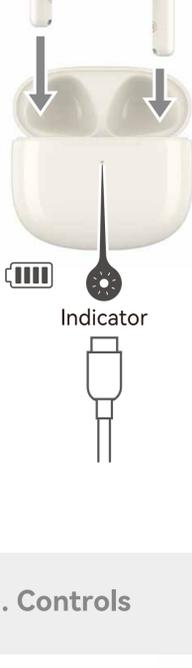

**Earbuds**  
Place earbuds in the charging case and keep the case closed.



**Charging case**

1. Please connect the Type-C power source with the included Type-C charging cable for charging.
2. Orange LED is steady lit when charging and off when fully charged.

**Note:**  
Please do not charge the earbuds when there is sweat or other liquids inside the charging port, which may damage the earbuds.

Input: 5V==200mA(Earbuds)  
5V==1A(Charging case)

### 7. Controls

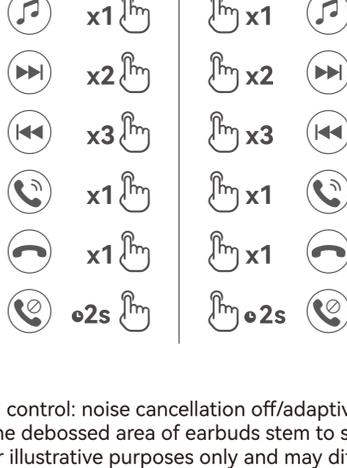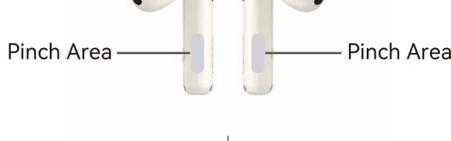

- Note:**
1. Default sound control: noise cancellation off/adaptive noise cancellation.
  2. Easily pinch the debossed area of earbuds stem to select functions.
  3. Images are for illustrative purposes only and may differ from the actual product.
  4. Download Edifier Connect App for more customizable control settings.

For more information, please visit our website:

[www.edifier.com](http://www.edifier.com)



@Edifierglobal



@Edifier\_Global



@Edifier\_Global

Model: EDF200117  
Edifier International Limited  
P.O. Box 6264  
General Post Office  
Hong Kong

www.edifier.com  
© 2023 Edifier International Limited. All rights reserved.  
Printed in China

**NOTICE:**  
For the need of technical improvement and system upgrade, information contained herein may be subject to change from time to time without prior notice.

Products of EDIFIER will be customized for different applications. Pictures and illustrations shown on this manual may be slightly different from actual product.

If any difference is found, the actual product prevails.

## JP 1. オン/オフ



1. ケースが開くと電源がオンになります。
2. ケースにいれて閉じると電源がオフになります。

注:

電源を入れてもイヤホンが新しいデバイスとペアリングしない場合、10分後に自動的に電源がオフになります。電源を入れても、イヤホンが接続したデバイスと再接続しない場合、120分後に自動的に電源がオフになります。

## 2. ペアリング



1. イヤホンをケースに入れ、ケースを開いたままにします。
2. ケースのボタンを約3s押してください。白色と緑色のLEDが交互に点滅します。
3. 接続設定するデバイスで「EDIFIER W320TN」を選択します。成功すると白色LEDは1回点滅してから消灯します。

初回のペアリング

1. イヤホンをケースに入れ、ケースを開いたままにします。白色と緑色のLEDが交互に点滅します。
2. 接続設定するデバイスで「EDIFIER W320TN」を選択します。成功すると白色LEDは1回点滅してから消灯します。

クイックペアリング(Android 6.0+の携帯電話)

充電ケースを開き、ケースは携帯電話の隣に保持し(携帯電話はロック解除され、Bluetooth®がオンになっていることを確認)、ポップアップウィンドウが表示されたらペアリング確認をタップすると、簡単に接続できます。

注:

後の使用のために、イヤホンは前回使用したデバイスに自動接続します。

## 3. リセット



1. イヤホンをケースに入れ、ケースを開いたままにします。
2. ケースのボタンを3回押して左&右の接続に再度入り、ペアリング記録をクリアし、白色LEDがゆっくり点滅します。
3. 接続設定するデバイスで「EDIFIER W320TN」を選択します。白色と緑色のLEDが交互に点滅し、成功すると白色LEDは1回点滅してから消灯します。

## 4. デュアルデバイス接続



1. デバイスAをイヤホンとペアリングします。完了したら、イヤホンをケースに入れたまま、ケースを開いたまま、ケースのボタンを約3s長押しすると、再度ペアリングモードに入り、デバイスAはイヤホンから接続解除されます。
2. デバイスBの「EDIFIER W320TN」を選んで接続します。
3. デバイスAの「EDIFIER W320TN」を選んで手動接続します。2つのデバイスが接続完了すると、白色LEDは1回点滅し、電源がオフになります。

注:

1. 着信があると、イヤホンは自動的に通話デバイスに切り替わります。通話が終了すると、イヤホンは元のデバイスに戻すことができます。
2. 音声アシスタントは、2台のスマートフォンとイヤホンを同時にペアリングした場合に、最新の有効なスマートフォンで有効にすることができます。
3. デバイスからデバイスへ切り替える場合には、現在のデバイスで音楽を一時停止し、切り替えたい番目のデバイスで音声再生を開始します。
4. 電源を入れるたびに、イヤホンは、有効なBluetooth範囲内で利用できる場合、直前に接続された2台のデバイスと自動的に再接続します。

## 5. 音楽の自動一時停止



音楽を聴いている最中に、片方または両方のイヤホンを取り外すと、音楽は自動的に一時停止します。音楽を再開するには、イヤホンを耳に戻します。この機能は、Edifier Connectアプリで「装着検出」設定で無効、設定することができます。

## 6. 充電



**イヤホン**  
イヤホンを充電ケースに入れ、ケースを閉じたままにします。

**充電ケース**


1. 充電用のタイプCケーブルで電源にケースを接続してください。
2. 充電中はオレンジLEDが点灯し、充電が完了すると消えます。

注:

汗または別の液体が充電ポートの中にある場合、イヤホンを充電しないでください。イヤホンが損傷する場合があります。

入力: 5V ≒ 200mA(イヤホン)  
5V ≒ 1A(充電ケース)

## 7. コントロール

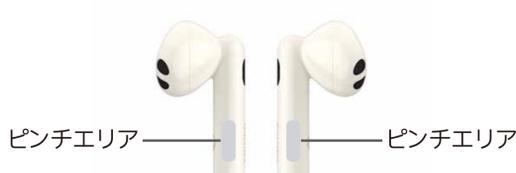

注:

1. デフォルトのサウンドコントロール: ノイズキャンセルオフ/アダプティブノイズキャンセル。
2. イヤホンシステムのへこみ部分を軽くピンチして、機能を選択します。
3. 画像は参照用です。
4. Edifier Connectアプリをダウンロードして、よりカスタマイズ設定を行ってください。

詳細情報は当社ウェブサイトをご覧ください:

[www.edifier.com](http://www.edifier.com)



@Edifierglobal



@Edifier\_Global



@Edifier\_Global

モデル: EDF200117  
Edifier International Limited  
P.O. Box 6264  
General Post Office  
Hong Kong

[www.edifier.com](http://www.edifier.com)

© 2023 Edifier International Limited. 禁無断転載  
印刷: 中国

ご注意:

本書に記載の情報は、技術の改良、システムのアップグレードなどのため、予告なく変更されることがあります。EDIFIERの製品は、さまざまな用途を考慮してカスタマイズされます。本書の図や写真は実際の製品と異なることがあります。その場合、実際の製品設計が優先します。