Features

- Zigbee 3.0 compliant
- Neutral wire required
- Touch capacitive switches
- Blue backlight to indicate switch status
- Retrofit to standard mounting brackets
- 2-way switching compatible with standard switches or 2-way Mercator Ikuü switches
- White, UV resistant material
- Combination head screws
- On/off control via the app (both individual & master)
- Customizable timers & schedules via the app
- Works with both Amazon Alexa and Google Assistant
- 3 year in-home warranty
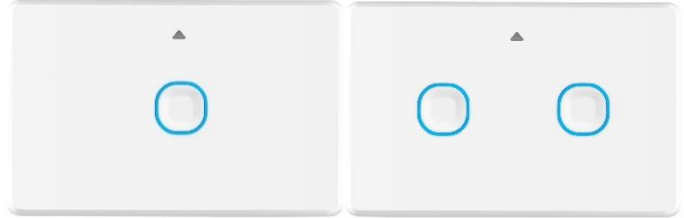
Network/Device Requirements

Connectivity	Zigbee
Requirements	Mercator Ikuü Zigbee hub
Protocol	IEEE 802.15.4
Wireless Frequency	2.4GHz
App Requirements	Mobile device running iOS or Android. (Refer to ikuu.com.au for minimum specs)

Included Accessories

Faceplate, Cut-out template, Mounting screws

Technical Specifications

	SSW01GX-ZB	SSW02GX-ZB
Switches	1	2
Neutral Required	Yes	
Supply Voltage	230 - 250V a.c. 50Hz	
Standby Wattage	<0.05W	
Operating Load (all channels combined)	Resistive: 1000W (each gang) Incandescent: 1000W (each gang) LED: 400W (each gang)	
Switched Poles	Active	
IP Rating	IP20 (indoor use only)	
Terminal Size	6mm^2 (can fit up to 3 x 2.5mm^2 wires per terminal)	
Rear Colour	Yellow	
Housing Material	Polycarbonate	
Contact Material	Brass	
Weight	135g	140g
Dimensions	115mm x 74mm x 44mm	
Cut-out Dimensions	80mm x 50mm	
Mounting Centres	84mm	
Compliance / Standards	AS/NZS 4268, AS/NZS 60669.1, AS/NZS 60669.2.1, CISPR 15, CISPR 32, AS/NZS 2772.2	

NOTE: Minimum load required. Contact customer care for more information.

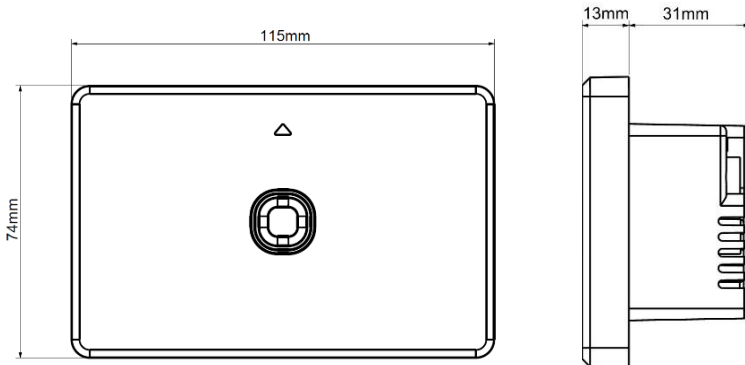*Download the app using the QR code or visit the iOS or Google Play store.
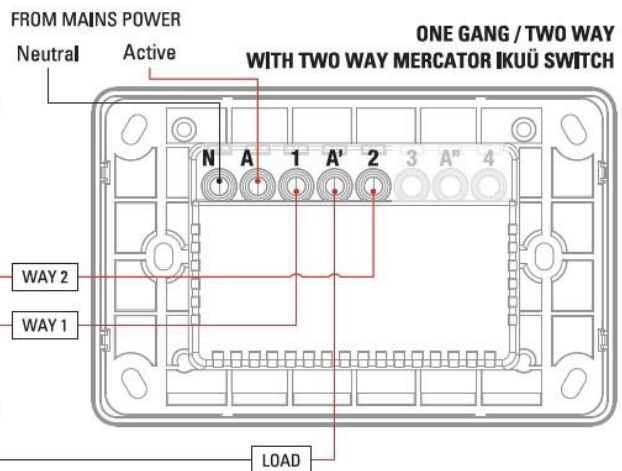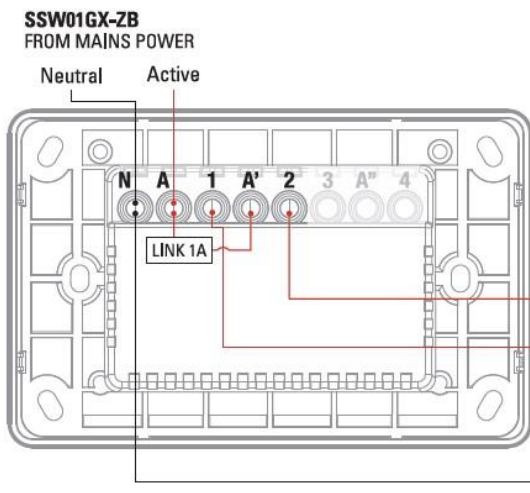
www.ikuu.com.au

zigbee

works with the Google Assistant

WORKS WITH amazon alexa

Dimensions

115mm
74mm
13mm 31mm

Wiring Diagrams

SSW01GX-ZB
FROM MAINS POWER
Neutral Active
ONE GANG / ONE WAY
N A 1 A' 2 3 A" 4
LINK
LOAD

SSW01GX-ZB
FROM MAINS POWER
Neutral Active
ONE GANG / TWO WAY WITH STANDARD SWITCH
N A 1 A' 2 3 A" 4
LINK
MECH SWITCH 1
WAY 1 1
WAY 2 2
C
LOAD

SSW01GX-ZB
FROM MAINS POWER
Neutral Active
N A 1 A' 2 3 A" 4
LINK 1A
WAY 2
WAY 1

FROM MAINS POWER
Neutral Active
ONE GANG / TWO WAY WITH TWO WAY MERCATOR IKUÜ SWITCH
N A 1 A' 2 3 A" 4
LOAD

*Download the app using the QR code or visit the iOS or Google Play store.

www.ikuu.com.au

zigbee

works with the Google Assistant

WORKS WITH amazon alexa

SSW02GX-ZB FROM MAINS POWER — Neutral, Active — **TWO GANG / ONE WAY**

SSW02GX-ZB FROM MAINS POWER — Neutral, Active — **TWO GANG / TWO WAY WITH STANDARD SWITCH** — MECH SWITCH 1, MECH SWITCH 2

SSW02GX-ZB FROM MAINS POWER — Neutral, Active — **FROM MAINS POWER** Neutral, Active — **TWO GANG / TWO WAY WITH TWO WAY MERCATOR IKUÜ SWITCH**
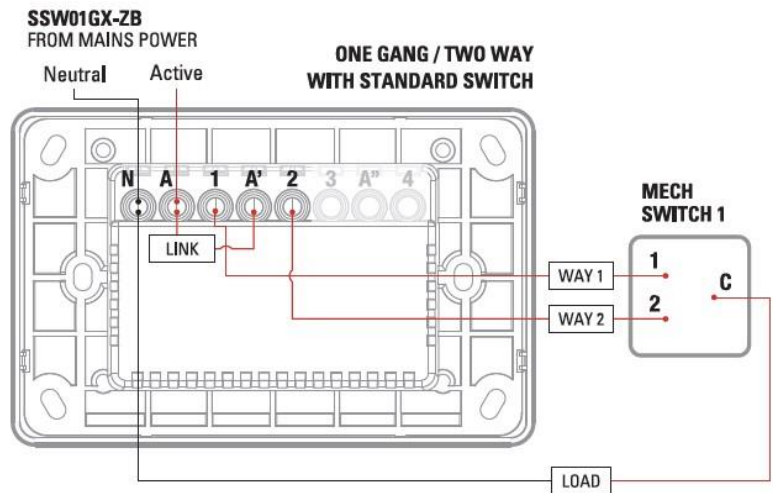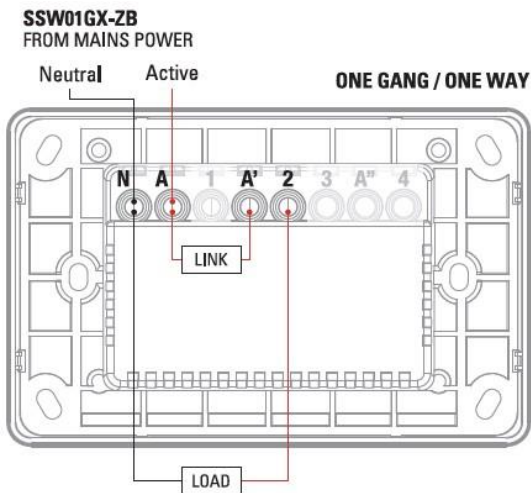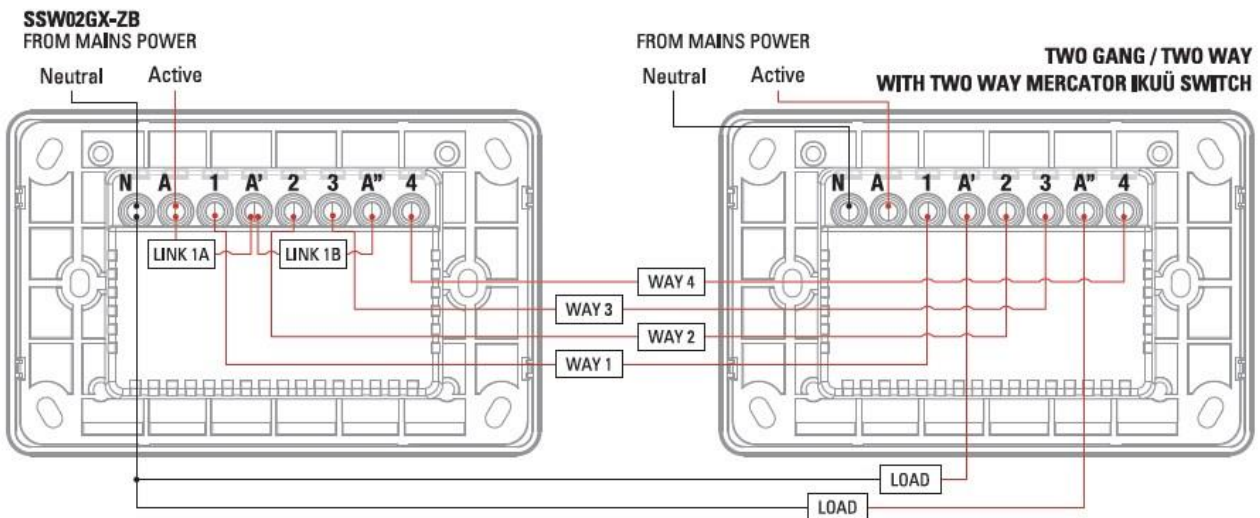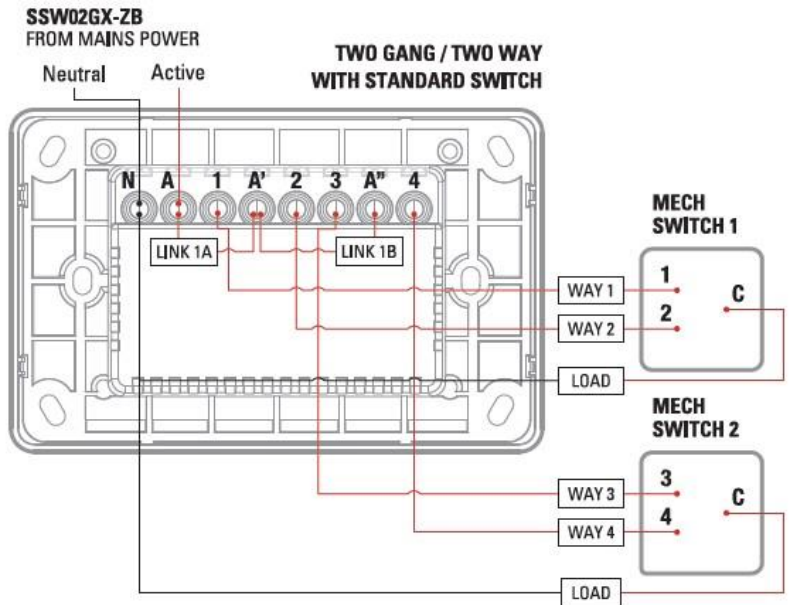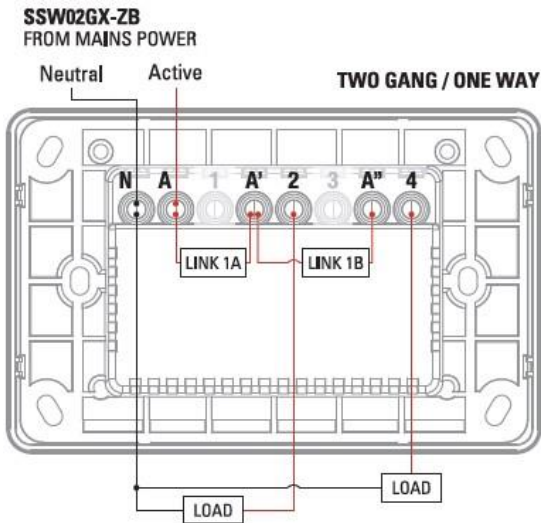
This product is valid for 3 years in-home warranty from the date of purchase. Please retain proof of purchase and certificate of compliance from the installation to make a claim. Please visit https://www.mercator.com.au/product-support/warranty for more information. For Mercator Ikuü contractor or end consumer support please visit www.ikuu.com.au or contact our customer service team on 1300 552 255 or via email at customercare@mercator.com.au

*Download the app using the QR code or visit the iOS or Google Play store.

www.ikuu.com.au

zigbee · works with the Google Assistant · WORKS WITH amazon alexa