

Model 101-2041

Full product specifications: www.humancentric.com/101-2041

Need help? Contact support: support@humancentric.com



WARNING




To reduce the risk of injury to persons, read all instructions carefully. HumanCentric assumes no responsibility for personal injury or property damage sustained by or through the use of this product.

1. Read all instructions carefully.
2. Incorrect installation may lead to damages or serious injury. Ensure the product and monitor are secure before use.
3. Make sure the monitor mount that this product will be mounted to can support the combined weight of the monitor and adapter.


COMPATIBILITY INFORMATION

Works with mounts that have VESA patterns of 50 x 50, 75 x 75 or 100 x 100 mm

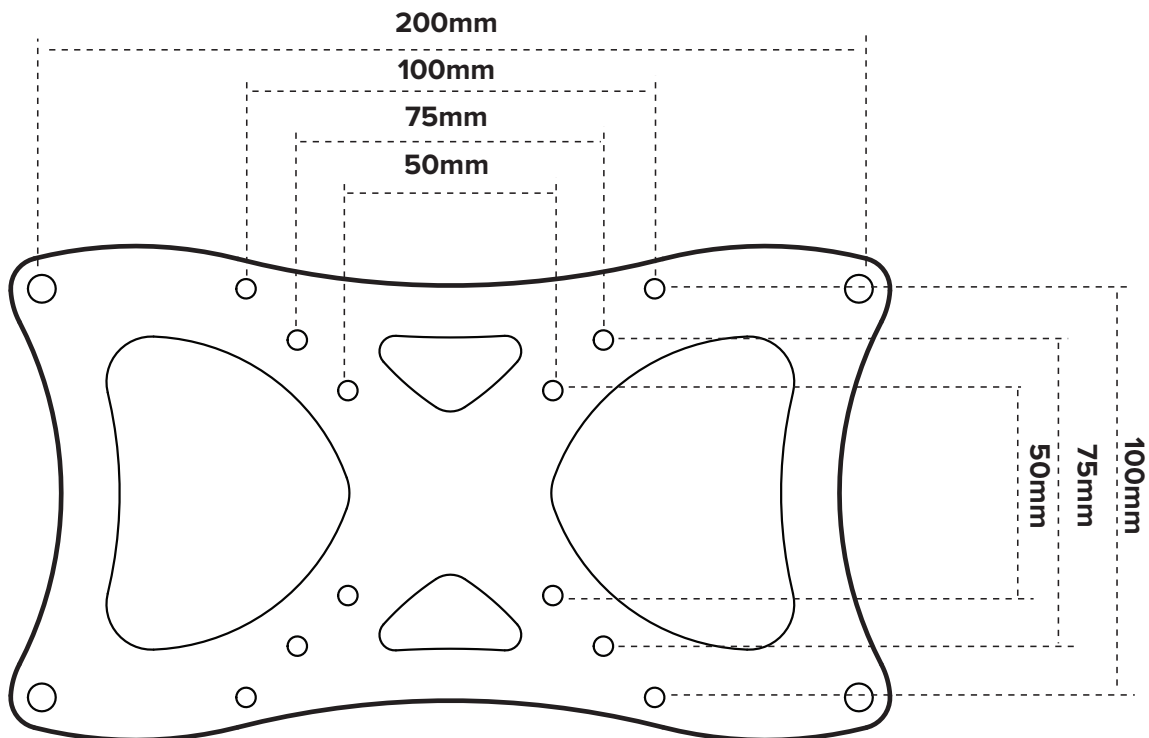

PARTS INCLUDED

Note: Not all parts will be used in the installation. Multiple configuration options are provided to fit different monitors, and different parts are used for different configurations.

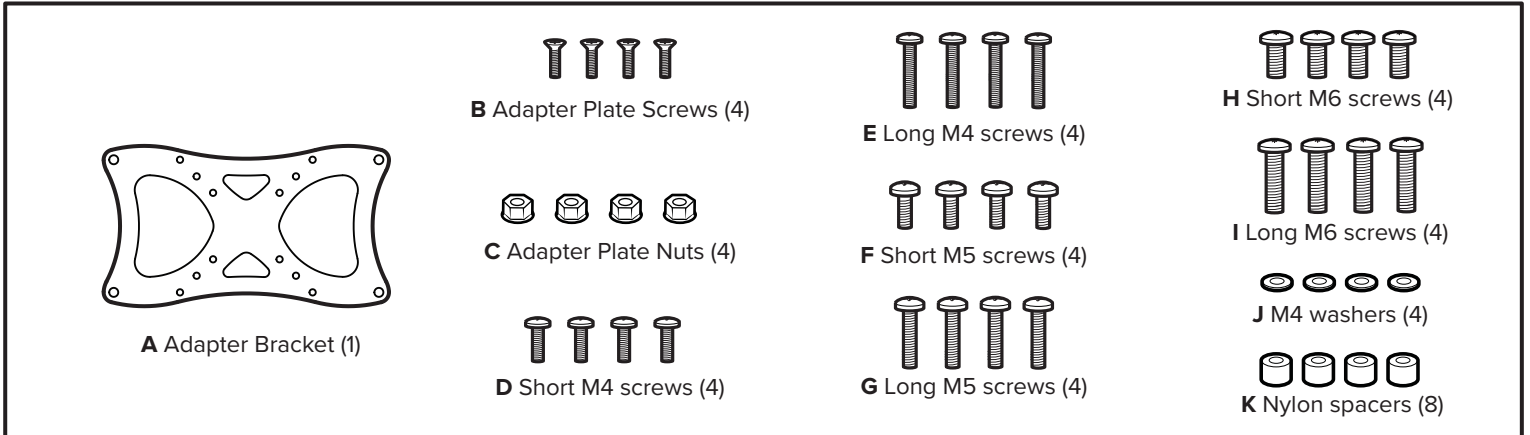

ADDITIONAL TOOLS REQUIRED

Phillips Head Screwdriver
Adjustable wrench


1. SELECT SCREWS AND SPACERS




In this step you **select** the right screws and spacers. Do not **install** them until step three.

Hang tight - this step can take some trial and error to find the right combination!


First, try different size screws D through I included with the mounting kit to determine the correct screw diameter for your monitor

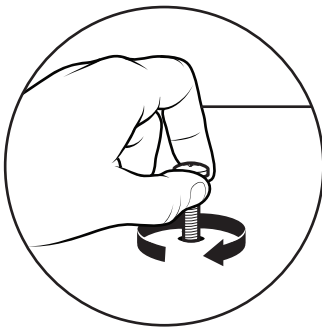


Next, lay the mounting plate on the back of the monitor. If it lays flat on the back of the monitor and the mounting holes are **not** inset, then the spacers (if needed for shallow holes) will go **above** the extension arms:

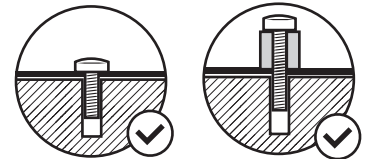

If it doesn't lay flat on the monitor, then use the spacers K between the monitor and the bracket to create a flat, even surface:

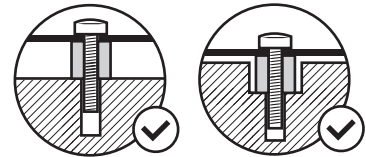

Ensure that you choose an appropriate length screw and spacer combination that is not too long or too short:


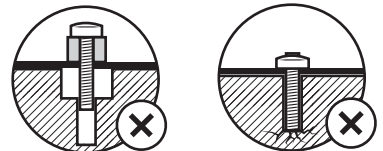


Will not hold monitor

Will damage monitor

2. ATTACH ADAPTER BRACKET TO MOUNTING PLATE



Place the adapter bracket over the mounting plate so the 100mm and 75mm VESA pattern holes are aligned with the proper holes in the bracket.

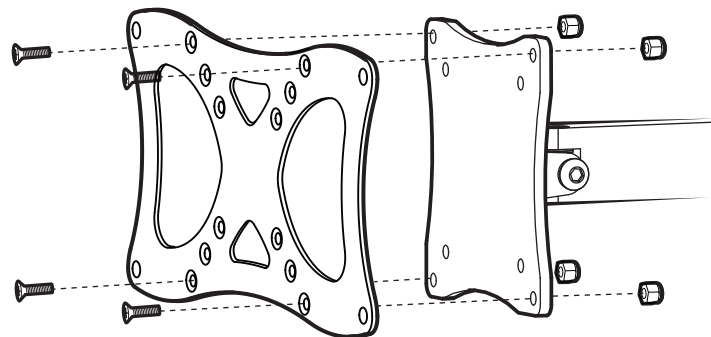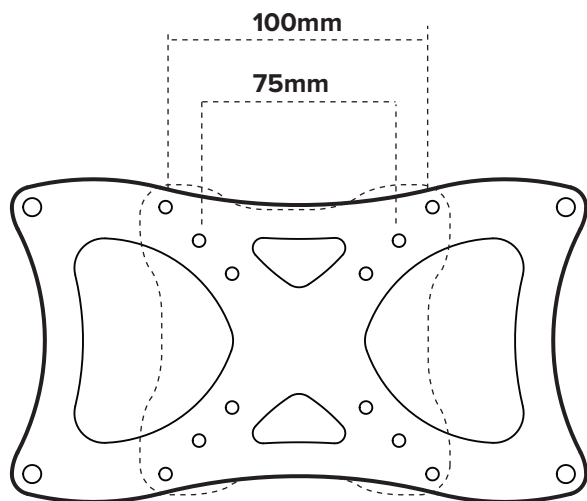

Insert the screws B through the largest pattern on the mounting plate and secure the adapter bracket to the mounting plate with the adapter plate nuts C. Tighten securely.

3. ATTACH MOUNTING PLATE TO MONITOR

Using the screw / spacer combination you selected in the previous step, attach the mounting plate to the back of the monitor.

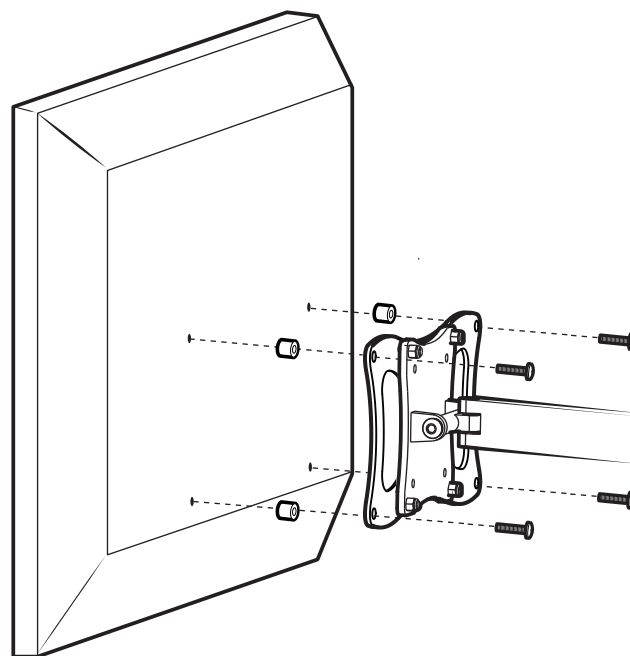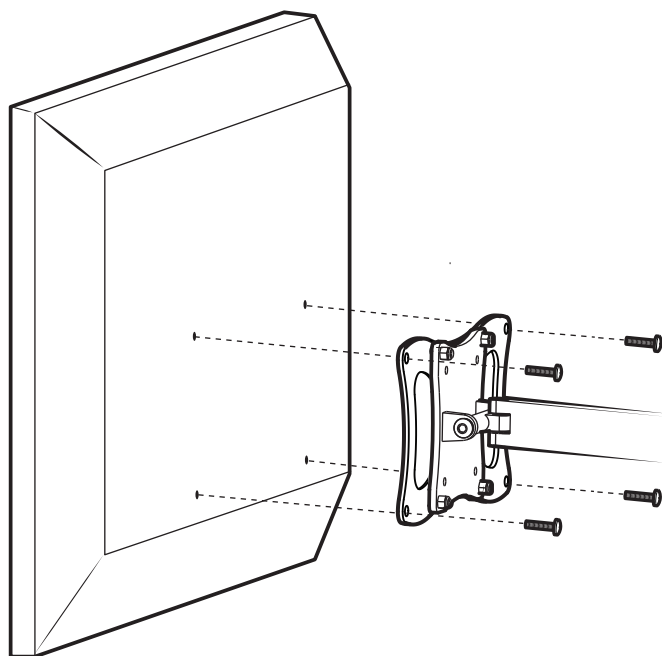

To complete the installation, follow the instructions that came with your monitor mount.



WARNINGS



- The wall must be capable of supporting five times the weight of the device (such as a monitor) and mount combined
- Mounts must be attached as specified in the instruction manual. Improper installation may result in damage or serious personal injury.
- Safety gear and proper tools must be used. This product should only be installed by those with the necessary skills to install the hardware. If you do not have the necessary skills, installation should be handled by a professional.
- Use the mounting screws provided and do not over-tighten the mounting screws
- This product contains small items that can be a choking hazard if swallowed. Keep these items away from children.
- Do not use this product for any purpose not explicitly specified by manufacturer
- This product is intended for indoor use only. Using this product outdoors could lead to product failure or personal injury.
- Manufacturer is not responsible for damage or injury caused by incorrect assembly or use.
- Check that the mount is secure and safe to use at regular intervals (at least every three months).

HumanCentric intends to make this manual accurate and complete. However, HumanCentric makes no claim that the information contained herein covers all details, conditions, or variations. Nor does it provide for every possible contingency in connection with the installation or use of this product. The information contained in this document is subject to change without notice or obligation of any kind. HumanCentric makes no representation of warranty, expressed or implied, regarding the information contained herein. HumanCentric assumes no responsibility for accuracy, completeness or sufficiency of the information contained in this document.