SFM3-63-50-275



Medium Current Filters

Novaris SFM filters provide the highest level of protection with the lowest let through voltage. Installation at a main switch board will protect all the connected downstream equipment.

Percentage Active Display

A digital display confirms the device rating by displaying the percentage active of the redundant segments. The display indicates segment status and thermal overload.

Three Stages of Protection


Novaris surge filters have 2 stages of varistor protection separated by a low pass LC filter. This 3 stage combination reduces the effects of high frequency noise and transients to provide the highest level of protection to sensitive loads.

All Mode Protection

Protection is provided for all combinations of lines (L-L, L-N, L-E, N-E) ensuring the maximum level of protection is achieved at all times.


Active Alarm

Fail-safe alarm contact allows for remote monitoring.

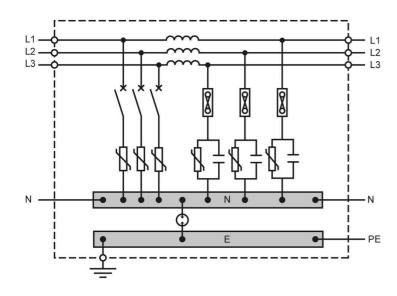

Wiring

Dimensions



Standards

IEC 61643-11:2011 AS/NZS 1768:2007 SPD connected to low-voltage power systems - Type 1+2 A.C. power system SPD - Cat C, B



Generated Tue Nov 02 2021

Product Datasheet

-40°C

Electrical Specifications

Connection type	۲	Series
Modes of protection	ĥ	L-N, L-PE, N-PE
Number of ports		2
Number of phases	≔	3
Location		Indoor
Nominal voltage	Uo	230VAC
Short circuit withstand level	I	50kA
Maximum backup fuse	₽	63A
Earth leakage current	I _{pe}	<1µA

Mechanical Specifications		
Minimum operating temperature	ß	
Maximum operating temperature	l	
	Â	

Maximum operating temperature	l	70°C
Minimum operating humidity	۲	5%
Maximum operating humidity	٨	95%
Mounting method	J.C.	Panel
Environmental rating		IP20
Terminal capacity - power	Θ	35mm²
Terminal screw torque - power	C	1Nm
Terminal capacity - alarms	Θ	2.5mm ²
Terminal screw torque - alarms	C	0.5Nm

Electrical (L-N) Specifications

Maximum load current	ľ	63A
Maximum continuous voltage AC	U _c	275VAC
Maximum voltage drop (% of Uo)		<1%
3dB frequency @ 50Ω		420Hz
Maximum discharge current (8/20 µs)	l _{max}	50kA
Nominal discharge current (8/20 µs)	I _n	20kA
Lightning impulse current (10/350 µs)	I _{imp}	6.25kA
Voltage protection level (3kA 8/20µs)	U _p	360V
Response time	t _A	Instantaneous

Other Specifications

Product Code SFM3-63-50-275


Indication Specifications

Alarm contact current		2A
Display	Ţ	LED power and thermal failure
Alarm	Ţ	SPST NC power and thermal failure
Alarm isolation	្រ័	4kV

Shipping Specifications

Weight	Â	24kg
Customs tariff	*	85363000, 85363010

www.novaris.com.au

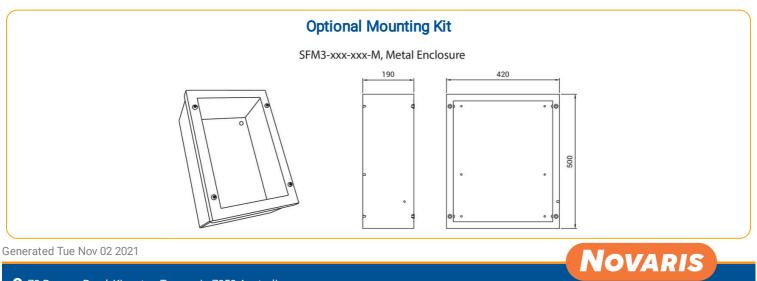

72 Browns Road, Kingston Tasmania 7050 Australia
J +61 3 6229 7233 ⊠ sales@novaris.com.au