


VZ-X Firmware Update

First, download the Firmware .bin file here and save it to your desktop.




We also recommend that your VZ-X is plugged into a power source before performing the update.


- 1 Connect your computer's Wi-Fi to the VZ-X.
[Here](#) you can learn how to connect your VZ-X to Wi-Fi.

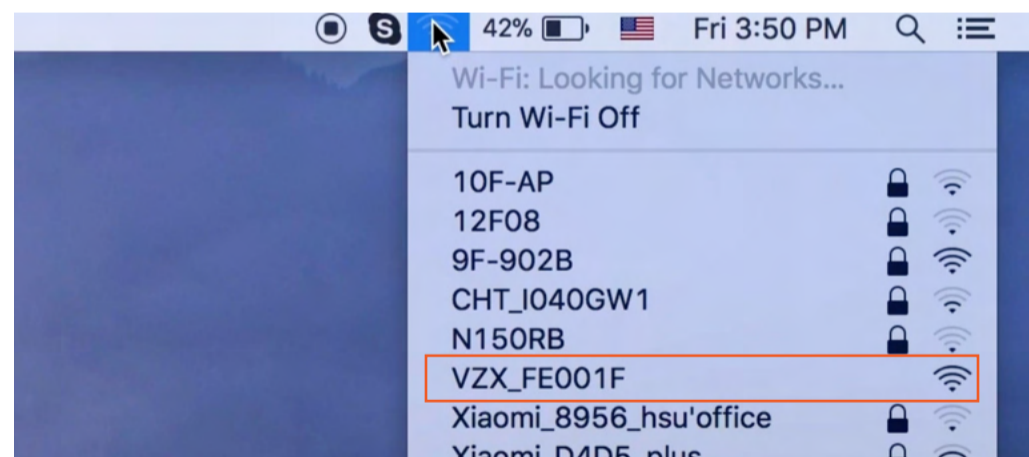

- 2 Open a browser of your choice and type in the following address: 10.10.10.1

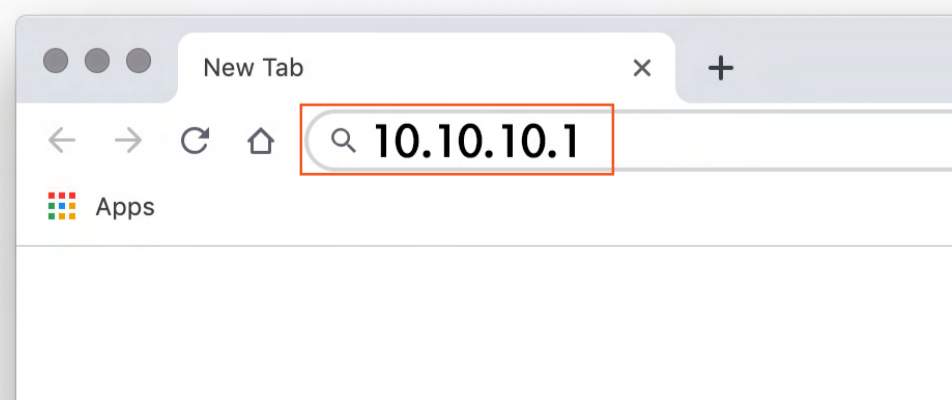

3 The default login is “admin” and the password is also “admin”.

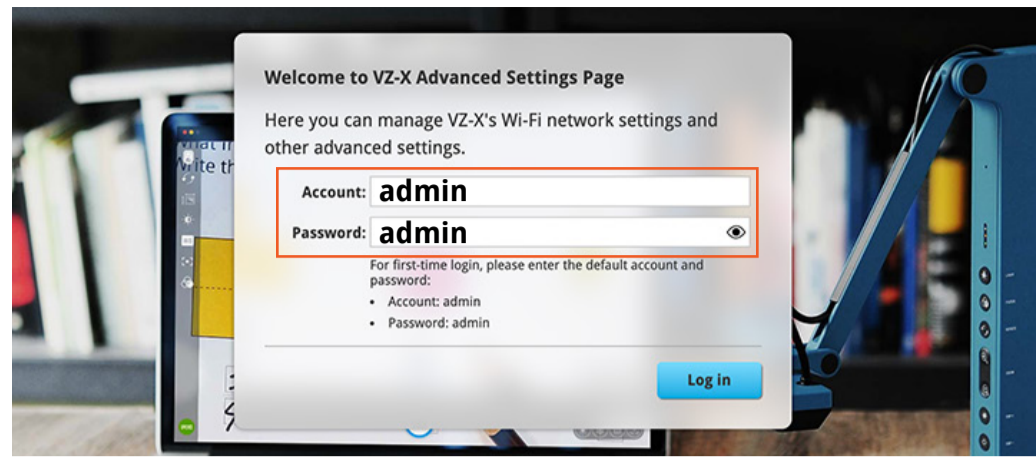

4 At the bottom of the Advanced Settings Page and under the Firmware Update section, click ‘Import’.

Firmware Update

Firmware version: VZ-X_00000000

Import firmware updates downloaded from IPEVO here.

Import

5 Select the .bin file you downloaded and check the box.

Firmware Update

Firmware version: VZ-X_00000000

File: VZ-X_2033.bin

Please read the following carefully before you proceed with the update:

- Make sure VZ-X is powered on throughout the process
- Do not touch any camera button/switch or close this window

I have read and understood the above

Cancel

Import

6 A countdown process will initiate. DO NOT turn off the VZ-X while it is updating. The white LED will blink continuously while updating which is normal.



7 Once the white LED stops blinking, the amber LED will turn on and the VZ-X should disconnect automatically from your computer indicating a successful update. You can now reconnect to the VZ-X and sign back into the Advanced Settings Page to verify that the firmware version has been updated to VZ-X_2033.

Firmware Update

Firmware version: VZ-X_2033

Import firmware updates downloaded from IPEVO here.

Import