





# AXIOM® 12 Cup Coffee Brewer

## **Features**



- Adjusts automatically to varying water pressure
- Machine ships with all warmers turned off to accommodate thermal carafes
- Electronic diagnostics and built-in tank drain make service easier
- Large 200oz. (5.9L) tank provides back-to-back brewing capacity
- Ensure coffee quality with programming for brew level, cold brew lock- out and tank temperature, set easily from the front of the machine
- Coffee extraction controlled with programmable pre-infusion, pulse brew and digital temperature precision
- Energy-saver mode reduces tank temperature during idle periods
- Hot water faucet
- SplashGard® funnel deflects hot liquids away from the hand
- PROP 65 Warning Decal included in packaging with equipment
- Servers not included
- 2 year parts and labor warranty

#### **AXIOM-3**

Dimensions: 18.9" H x 8.4" W x 22.1" D (48cm H x 21.3cm W x 56.1cm D)

## **Related Products**

Paper Filter Pack

Product No. : 20115.0000 Packed per case: 1,000

Dimensions:  $4\frac{1}{4}$ " Base x  $2\frac{3}{4}$ " Sidewall 10.8 cm Base x 6.98 cm Sidewall

Inlet Hose Only Product No. :00327.0002



**High Lime Sprayhead** Product No.: 40670.0005



Quick Connect Assembly Product No.: 34397.0000

**Sprayhead Cleaning Tool** Product No.: 38227.0000



Model

**Agency Listing** 

AXIOM-3, 1L/2U (McD)




# **Dimensions & Specifications**

Model	Product #	Volts	Amps	Tank Heater Watts		Brewing Capacity			Cord Attached
AXIOM-3	38700.0124	120/208	14.4	2620	3000	7.5 gal./hr.	4.0	35.5 lbs.	Yes*

#### 38700.0124 brewer

Brewing capacity: based upon incoming water temp of 60°F (140°F rise) per 1/2 gallon brew time of 4 minutes.

Electrical: 120/208 volt, 15.5 amp. model requires 3 wires plus ground service rated 120/208V, single phase, 60Hz. Plumbing: 20-90 psi (138-621 kPa). Machines supplied with  $\frac{1}{4}$  male flare fitting. Includes Quick Connect Assembly.

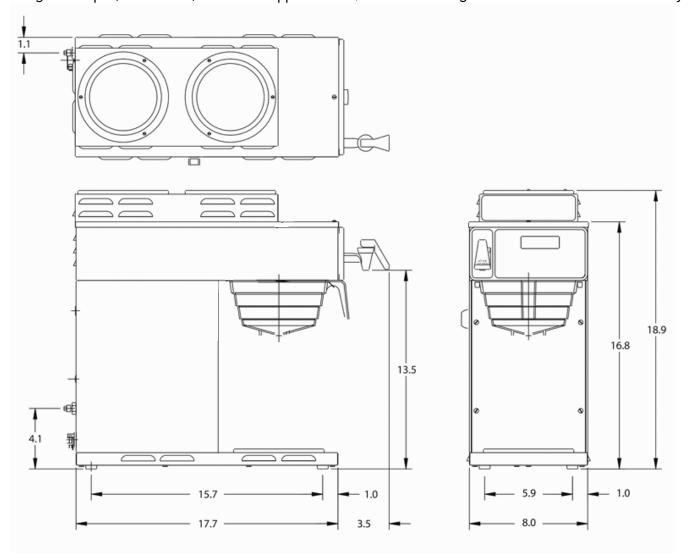

Bunn-O-Matic® Corporation - 5020 Ash Grove Drive, Springfield, Illinois 62711 • 800-637-8606 • 217-529-6601 • www.bunn.com

<sup>\*</sup>Power Cord: 12/4, NEMA L14-20P plug, 20 amp