



promate.net Lifestyle Technology

Mondo Ultra-Small Bluetooth® v3.0 Mono Headset



User Guide

Introduction

Answer calls efficiently with Mondo, the trendy yet functional ultra-mini C v3.0 mono handsfree headset by Promate. So small and very lightweight, this newest Bluetooth® headset delivers clear, crisp sound quality which makes it ideal for everyday use. Be free and live life easy with Mondo.

Packaging Content

- Mondo
- Ear hook
- User Guide

Specification:

- Bluetooth® specification: v3.0
- Supported profiles: Handsfree Profile, Headset Profile
- Output power: 15 mW
- Impedance: 32 Ohms
- Standby time: 100 hours
- Talking time: 5 hours
- Effective distance: up to 10 meters

Features:

- Ultra-mini Bluetooth® v3.0 mono headset
- Clear and crisp sound quality
- Super mini Lightweight design

Compatibility:


Mondo may be paired as a headset to any compatible Bluetooth® enabled devices.

Precautions

Please read all safety instructions and warnings thoroughly before using this product. Improper use of this product may result in damage to this or attached products. To keep the perfect performances of the product, never use it in the following conditions:

1. Moist or underwater conditions.
2. Conditions near the heater or high-temperature service.
3. Conditions with direct sunshine.
4. Conditions with apt falling.
5. Never dismantle the product without due permission, otherwise it may nullify the warranty clauses.

Appearance & Interface Description:

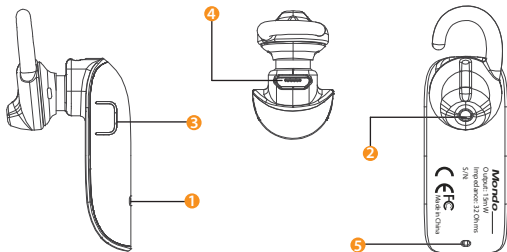

1. LED Indicator
2. Ear-piece
3. Multi-function button
4. Micro-USB charging port
5. Microphone

Operation Instructions:

1. Charging Mondo

- Plug the Micro-USB plug into Mondo.
- Plug the other end of the USB cable into a wall power socket or computer USB port.
- The red indicator on Mondo will turn on.
- When the battery is fully charged, the red indicator will turn off and the blue indicator will turn on. It takes approximately 1.5 hours to fully charge Mondo.

Note: Before using Mondo for the first time charge it fully. The red light indicator will flash when the battery is low. At the same time, you will hear a prompt tone. At this time, please charge Mondo.

2. Power on/off Mondo

- Press and hold the Multi-function button for 3 seconds then the blue LED light flashes with a prompt tone. Mondo is now turned on.
- Press and hold the Multi-function button for another 3 seconds then the blue LED light flashes with a prompt tone. Mondo is now turned off.

3. Pairing Mondo

You are required to pair Mondo with your mobile phone once before using it.

- Press and hold the Multi-function button for 5 seconds until you see the LED light in solid blue to go into the pairing mode.
- Activate Bluetooth® on your mobile phone
- Set your phone to discover 'Mondo' and follow the instruction
- If your phone asks for a passkey or PIN code, confirm with '0000' (4 zeroes). When the phone and Mondo are paired and connected, you will hear the prompt tone.

Note: If Mondo is not in pairing mode, your mobile phone won't find it. Please set Mondo into pairing mode before searching for Mondo. If no pairing is possible for a period of time (approximately 2 minutes), the headset will automatically leave pairing mode and go to the idle mode, the blue light changes to red and flashes.

4. Make and receive calls

Once Mondo is successfully paired and connected with your mobile phone, you can use it to make and receive calls. Mondo can be used with voice dialing if your phone supports the feature. Please consult your phone's manual for more information.

- **Using voice dialing:** Short press the MF-button once, wait for a prompt tone and say the name of the person you want to call.
- **Using the phone keys to make a call:** Dial a number on the phone as you normally do. Once the call has been set up, the sound will be transmitted to Mondo automatically.
- **Redial:** Press and hold the MF-button for 2 seconds to redial the last number.
- **Answering/Ending/Rejecting calls:** When Mondo is switched on and there is an incoming call:
 - Press the Multi-function button once to answer the call.
 - Press the Multi-function button once to end the call.
 - Long press the Multi-function button for 2 seconds to reject the call.
- **Put the call on hold:** Press and hold the MF-button for 2 seconds to put the current call on hold and accept the call waiting. (The blue LED light flashes with a prompt tone) Press and hold the Multi-function button for 2 seconds to resume to the first call.
- **Transferring calls:** During both incoming call and outgoing call state, you can short press the MF-button twice to transfer the call to the mobile phone. If you want to transfer the call back to Mondo, short press the Multi-function button twice again. Some mobile phones may require more confirmation.

5. Adjust the volume

You can increase/decrease the volume by increasing/decreasing the volume of your mobile phone. The volume of Mondo will be adjusted automatically. Please consult your mobile phone's manual for more information.



www.promate.net