



This device should be tested at least once a month by pressing the help button and speaking with the monitoring station.

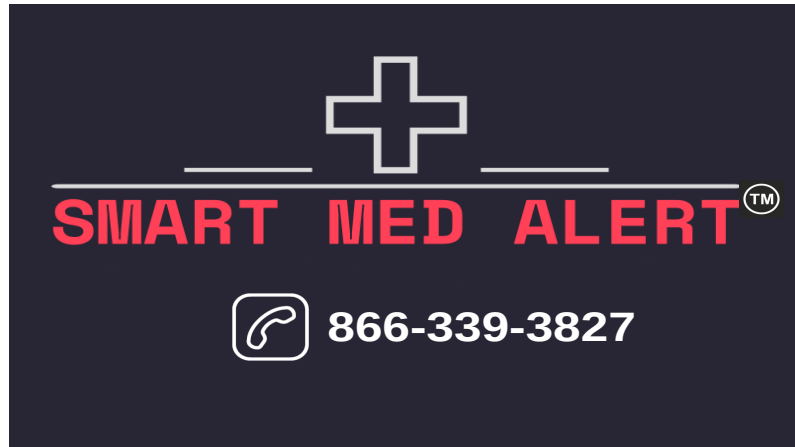


USER'S GUIDE

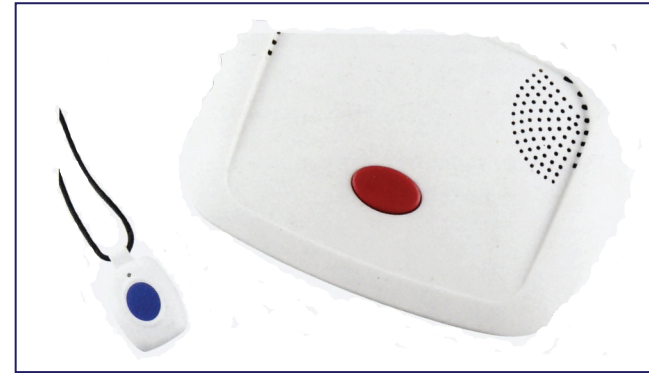

**PLEASE CALL
866-339-3827 to Activate Service**

support@smartmedalert.com
www.smartmedalert.com



Phone cord can be plugged into either of these ports

Connect phone cord to either phone port in the back of the unit. Connect other end of cord to the wall. This will also supply power to the unit

Press and hold the red SOS button on the base station or the button on the pendant to make a test call.



Press and hold this button to make SOS call.

Get help in three easy steps:

Summon help



Simply press help button



Professionally trained operators



Get Immediate Assistance from Specialist



Emergency Service



Help is on the way

Hang up or cancel


Press and hold the SOS button on the base station for 3 seconds to hang up the call or cancel dialing.

Other functions:

1. The device can send a silent periodic test signal to check phone line status every 7 days.
2. When pendant battery is low, it can send a low battery alert to let the monitoring center know. **You must press your pendant once a month to monitor battery life of the pendant.**

Other Options-

Please note the ON/OFF switch on the back of the unit

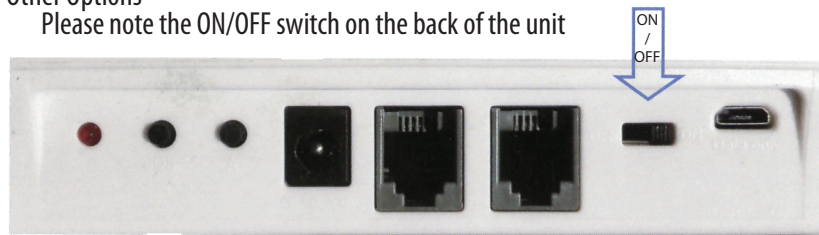

Option One: Switch in the ON position

When the switch on the back is in the ON position, the red SOS button on the top of the unit is pressed, an SOS Alert will be initiated and help will come on the line.

Option Two: Switch in the OFF position

When the switch on the back is in the OFF position, the red button on the top of the unit is then registered as a check in button. This option is for the user to press the button by a designated time of day to initiate a "check in" to the central station. If button is not Pressed by the designated time, the central station will then attempt to call the user and ensure they are safe.