
## Photoelectric Sensors BOS 5K-PU-LR10-S75 Order Code: BOS01JW





1) Optical axis receiver, 2) Optical axis emitter, 3) Sensitivity, 4) Output function, 5) Light-on/dark-on, 6) stability



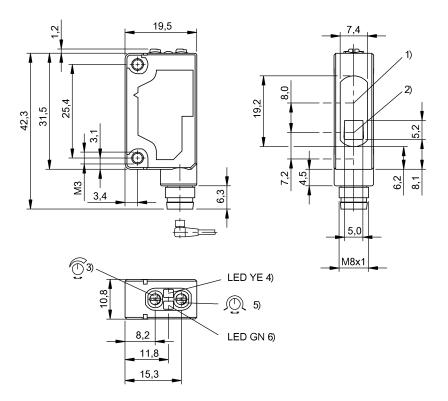

cULus CE WEEE UKCA

## Basic features Approval/Conformity

## Basic standard Principle of operation

Reference reflector

IEC 60947-5-2 Photoelectric sensor BOS R-22 5K Square Connection 90° Global

#### **Electrical connection**

Connection	Connector, M8x1-Male, 4-pin yes	
Polarity reversal protected		
Short-circuit protection	yes	
Electrical data		
No-load current lo max. at Ue	35 mA	
Operating voltage Ub	1030 VDC	
Rated operating current le	100 mA	
Rated operating voltage Ue DC	24 V	
Ripple max. (% of Ue)	10 %	
Switching frequency	2000 Hz	
Turn-off delay toff max.	0.25 ms	
Turn-on delay ton max.	0.25 ms	
Voltage drop Ud max. at le	1.5 V	

Display/O	peration
-----------	----------

Display Setting

Adjuster

Series Style

Trademark

Potentiometer 270° (2x) Output function- LED yellow Stability - LED green Light-on/dark-on Sensitivity (Sn)

Internet

## Photoelectric Sensors BOS 5K-PU-LR10-S75 Order Code: BOS01JW

# BVLLAL

#### Environmental conditions

#### **Optical features**

Ambient temperature	-1055 °C	Ambient light max.	5000 Lux
EN 60068-2-27, Shock	Half-sinus, 50 g <sub>n</sub> , 11 ms, 3x10	Average power Po max.	390 μW
EN 60068-2-6, Vibration	1055 Hz, amplitude 1.5 mm,	Beam characteristic	Divergent
	3x2 h	Blind zone	300 mm
IP rating	IP67	Laser class per IEC 60825-1	1
		Light spot size	Ø 5 mm at 3 m
Functional safety		Light type	Laser red light
MTTF (40 °C)	3 a	Polarizing filter	yes
		Principle of optical operation	Retroreflective sensor
		Pulse duration t max.	1.4 µs
Interface		Pulse frequency	28.6 kHz
Switching output	PNP normally open/normally	Pulse power Pp max.	4.5 mW
	closed (NO/NC)	Switching function, optical	dark-on/light-on
		Wave length	650 nm
Material			
Housing material	PC	Range/Distance	
	PBT	Range	010 m
Material sensing surface	PMMA	Rated operating distance Sn	10 m Adjustable
Mechanical data		_	
Dimension	10.8 x 43.5 x 19.5 mm		
Mounting part	Screw M3		

#### Remarks

Actuation object (target): gray card, 200 x 200, 90 % remission, lateral approach, approach direction vertical to lens axis plane. The sensor is functional again after the overload has been eliminated.

Order accessories separately.

Tightening torque max.

For additional information, refer to user's guide.

Only for applications per NFPA 79 (machines with a supply voltage of maximum 600 V). Use an R/C (CYJV2) cable with suitable properties for attaching the device.

Polarizing filters prevent spurious switching due to reflecting and shiny parts.

When using as a UL product the ambient temperature Ta max. must not exceed 50°C.

0.5 Nm

To meet the EMC requirements of EN 60947-5-2 the mounting bracket must not be grounded.

For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.


#### **Connector Drawings**




## Photoelectric Sensors BOS 5K-PU-LR10-S75 Order Code: BOS01JW

# BALLUFF

## Wiring Diagrams



### **Technical Drawings**

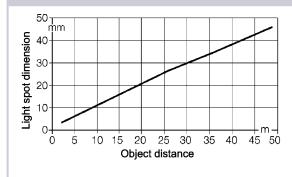

## **Opto Symbols**

### Warning Symbols

