


# 카탈로그

1.앱 설치  安装 APP.....	2
2.비밀번호 및 지문 설정  设置密码和指纹.....	8
3.데이터 백업  数据备份.....	11
4.공장 설정 복원  恢复出厂设置.....	11


참고: 작업 중에는 USB 드라이브에서 약간의 열이 발생하지만 이는 정상적인 현상이므로 걱정할 필요가 없습니다.



## 1. 앱 설치

1.공간이 조금만 남아 있어도 걱정하지 마세요. 휴대폰에 비밀번호를 설정했고 플래시 드라이브가 암호화 상태라는 뜻이니깐요. PC 소프트웨어를 다운로드하고 휴대폰에 설정한 비밀번호를 입력하기만 하면 됩니다.

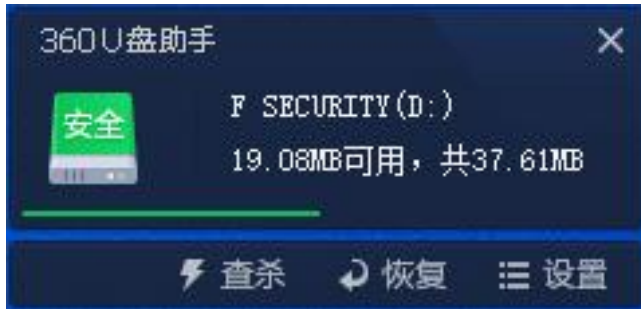

2.플래시 드라이브를 열고 시스템에 따라 소프트웨어를 다운로드합니다. 소프트웨어를 설치할 언어를 선택합니다.

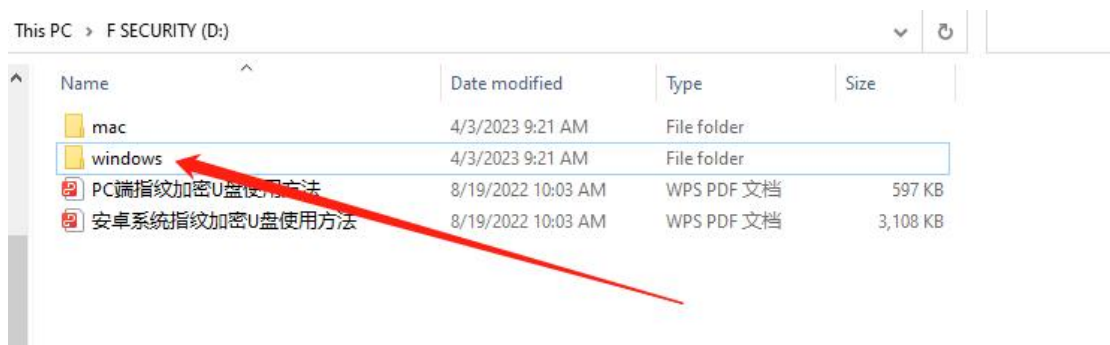

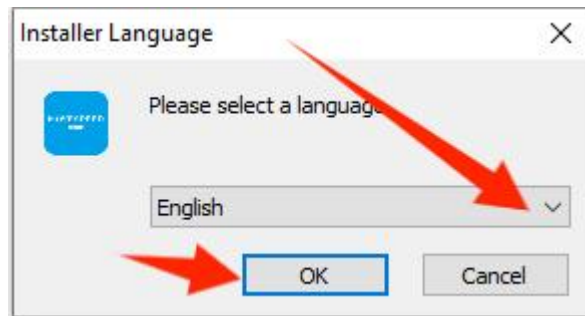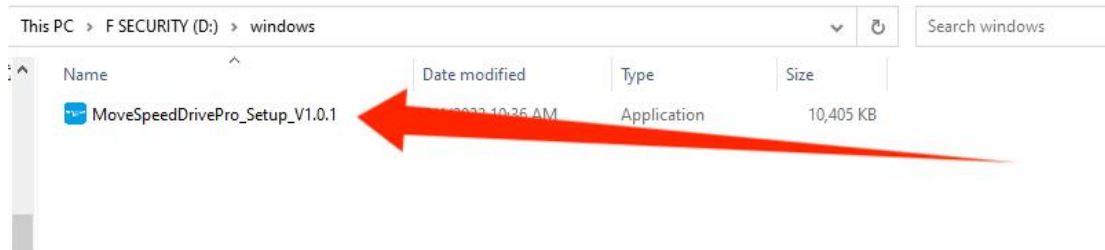


### 3. 백업 설정 설정하기

이 단계에서 백업할 파일 형식을 설정할 수 있습니다.

이것은 더욱 편리하게 백업할 수 있다.

또한이 기능을 끌 수도 있습니다.

참고: 백업할 파일의 종류를 선택할 수 있으며, 요구 사항이 없는 경우 기본 설정을 유지하는 것이 좋습니다.


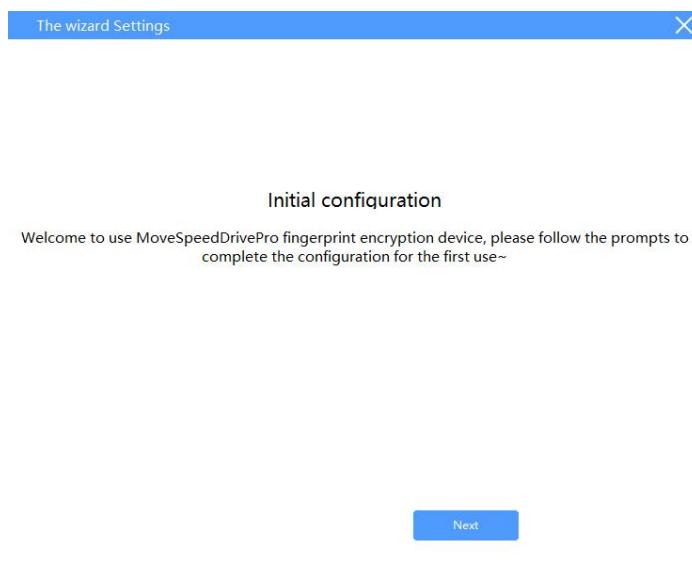


1. 자동 백업: 파일을 자동으로 백업합니다.

2. 디렉토리 백업: 데스크톱 파일을 추가하고, 파일, 문서를 다운로드하고, 백업을 위해 다른 디스크를 추가합니다.

3. 유형 백업: 전체 디스크를 스캔하고 스캔을 무시할 수 있습니다.

참고: 홈페이지에서 "Backup setting"을 클릭하여 설정을 조정할 수 있습니다.

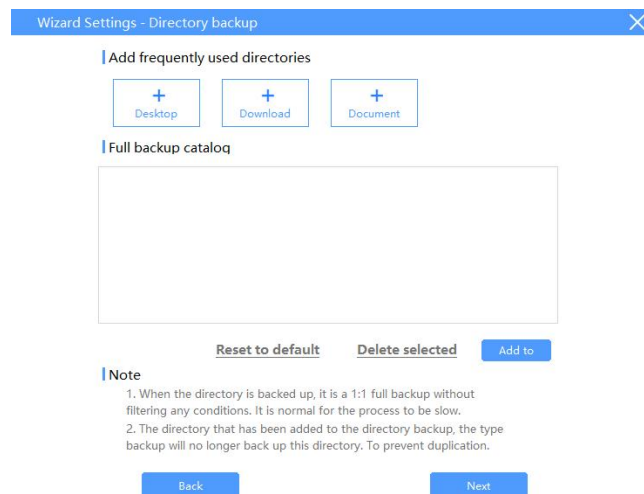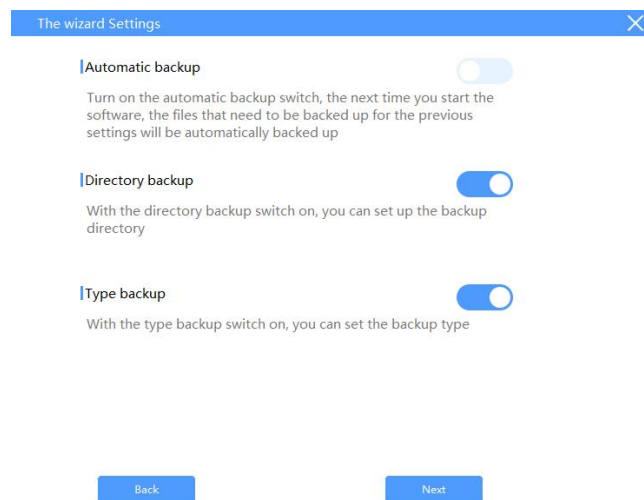

Wizard Settings - Type backup ✕

Folder of files to be scanned

C:\

[Reset to default](#) [Delete selected](#) [Add to](#)

Folder to ignore

C:\Program Files  
C:\Program Files (x86)  
C:\Windows

[Reset to default](#) [Delete selected](#) [Add to](#)

[Back](#) [Next](#)

Wizard Settings - Type backup ✕

Picture can choose format

- JPEG(\*.jpg;\*.jpeg;\*.jpe;\*.jif)
- HEIC(\*.heic)
- GIF(\*.gif)
- PNG(\*.png)
- BMP(\*.bmp;\*.rle;\*.dib)
- TIFF(\*.tif;\*.tiff)
- ICO(\*.ico)
- CameraRaw(\*.crw;\*.nef;\*.raf;\*.orf;\*.muv;\*.dcr;\*.mos;\*.raw;\*.pef;\*.srf;\*.dng;\*.x3f;\*.cr2;\*.erf;\*.sr2;\*.kdc;\*.mfw;\*.mef;\*.arw;\*.nrw;\*.rw2;\*.nwl;\*.iiq;\*.3fr;\*.srw)
- PhotoShop(\*.psd;\*.pdd)
- PICT File(\*.PCT;\*.PICT)

[Back](#) [Next](#)

Wizard Settings - Type backup ✕

Video format selectable

- MOV(\*.mov,\*.qt)
- MPEG4(\*.mp4,\*.mpeg4,\*.m4v)
- AVI(\*.avi)
- WMV(\*.wmv)
- MKV(\*.mkv)

Wizard Settings - Type backup ✕

Selectable document format

- Microsoft Word(\*.doc,\*.docx,\*.docm,\*.dot,\*.dotx,\*.dotm)
- Microsoft Excel(\*.xls,\*.xlsx,\*.xlsm,\*.xlt,\*.xltx,\*.xltm)
- Microsoft Power Point(\*.ppt,\*.pptx,\*.pptm,\*.pps,\*.ppsx,\*.ppsm,\*.pot,\*.potx,\*.potm)
- Microsoft Works(\*.wps,\*.wpt,\*.xlr,\*.wks)
- OpenOffice/LibreOffice Writer(\*.odt,\*.ott,\*.oth,\*.odm,\*.sxx,\*.stw,\*.sxxg)
- OpenOffice/LibreOffice Impress(\*.odp,\*.odg,\*.otp,\*.sxi,\*.sti)
- WordPerfect(\*.wpd)
- PDF(\*.pdf)
- CSV(\*.csv)
- TXT(\*.txt)
- TRF(\*.rtf)
- Compressed(\*.zip,\*.tar,\*.rar,\*.7z)
- ISO(\*.iso)
- DMG(\*.dmg)

Wizard Settings - Type backup ✕

Audio selectable format

- MP3(\*.mp3)
- Windows Media Audio(\*.wma)
- Wave(\*.wav)
- MPEG-4(\*.m4a,\*.m4b,\*.m4p,\*.m4r)
- Advanced Audio Coding(\*.aac)

Wizard Settings - Type backup ✕


**Copy options**

- Combine all files into one directory
  - Skip duplicates
- Keep the original path structure
- Exclude less than   Photos, videos, documents

**Backup options**

- Only backup new files
- Full backup
- Skip hidden files (folders)

Wizard Settings - Type backup ✕



Congratulations, you have completed the initial configuration, now start to experience the product!

[Back](#)

USB 드라이브에 액세스하려면 비밀번호를 입력합니다(이전에 휴대폰에 비밀번호를 설정한 경우).

## Hard Drive is Locked

Enter your password to unlock

[Forget Password](#)

Unlock

The screenshot shows the MOVE SPEED software interface. At the top, it says "MOVE SPEED" and "Normal Mode". Below this, there's a "View" section with a progress bar showing "97.0G available (119.2G total)". Underneath the bar, it lists storage categories: "Picture (229.5M)", "Video (21.2G)", "Music (440.5M)", "Document (143.6M)", and "Other (125.0M)". There are icons for each category. Below the "View" section is a "Settings" section with two options: "Backup settings" and "Encryption settings". At the bottom of the main area is a "One-click backup" section with a large blue "Start backup" button. In the bottom left corner, it says "Version: 1.0.1" and "Update".


## 2.비밀번호 및 지문 설정

"Encryption settings" 을 클릭합니다:


This screenshot is identical to the one above, but with a red arrow pointing to the "Encryption settings" option in the "Settings" section.



1.1. 비밀번호 암호화를 열거나 닫으려면 "Security Mode" 를 열거나 닫습니다.

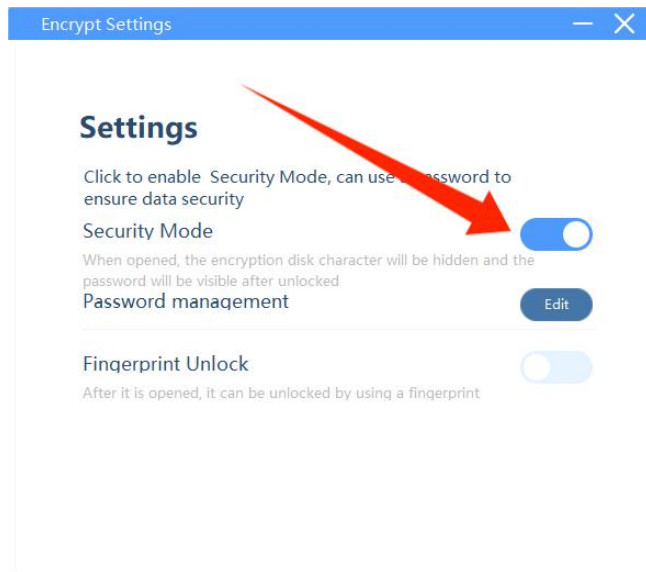

2.2. "Password management" - "Edit"을 클릭하여 비밀번호를 변경합니다.

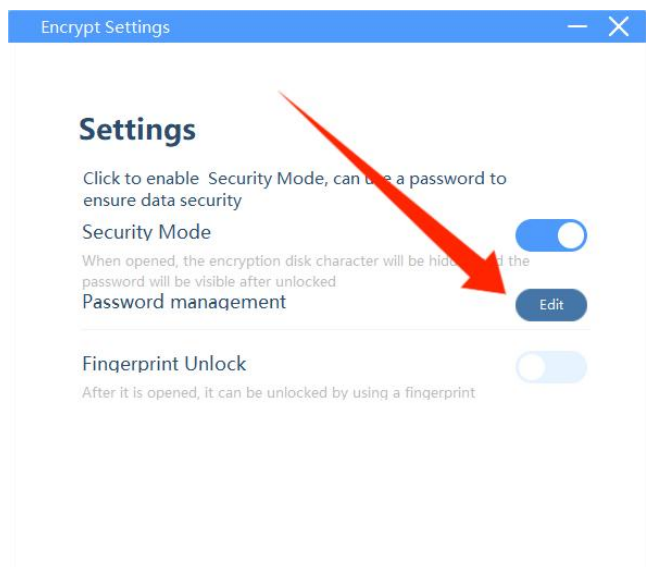


이전 비밀번호와 새 비밀번호 입력 - "Save"을 클릭하여 새 비밀번호를 저장합니다.

3. "지문 잠금 해제" "Fingerprint Unlock" "Edit"을 클릭하여 지문을 추가하거나 삭제합니다.


이제 지문을 삭제하거나 추가할 수 있습니다.

참고: 최대 10 개의 지문을 추가할 수 있습니다.

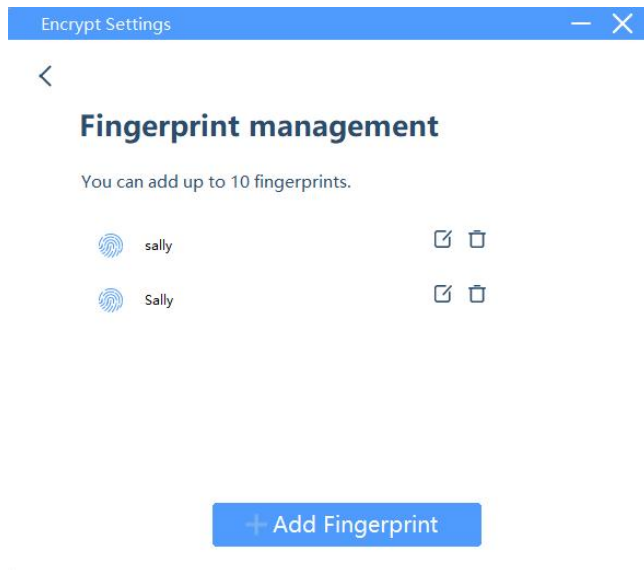

### 3.데이터 백업

"Start backup"을 클릭하면 백업 파일은 백업 설정에 따라 생성됩니다.


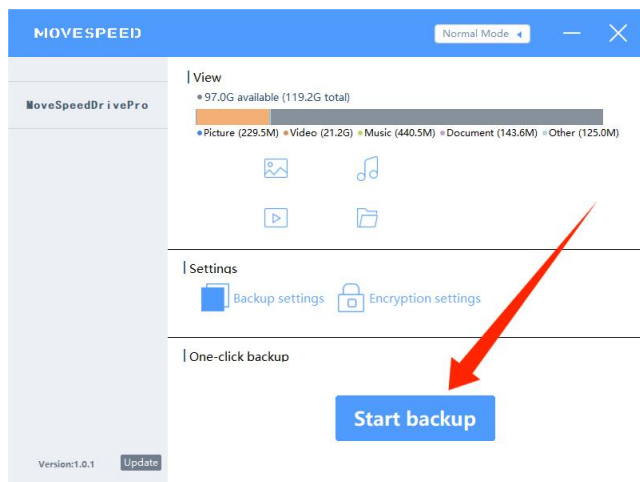


### 4.공장 설정 복원

참고: 공장 출하 시 설정으로 복원하면 전체 디스크가 지워지고 포맷되며, 이 경우 복원할 수 없습니다. USB 드라이브에 중요한

파일이 있는 경우 포맷하지 않는 것이 좋습니다.

비밀번호를 입력할 때 "Forget Password"을 클릭한 다음 "restore to factory settings"을 클릭합니다.

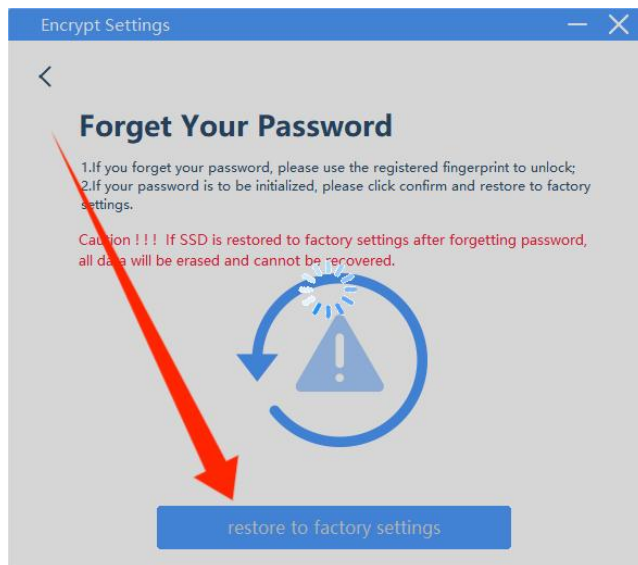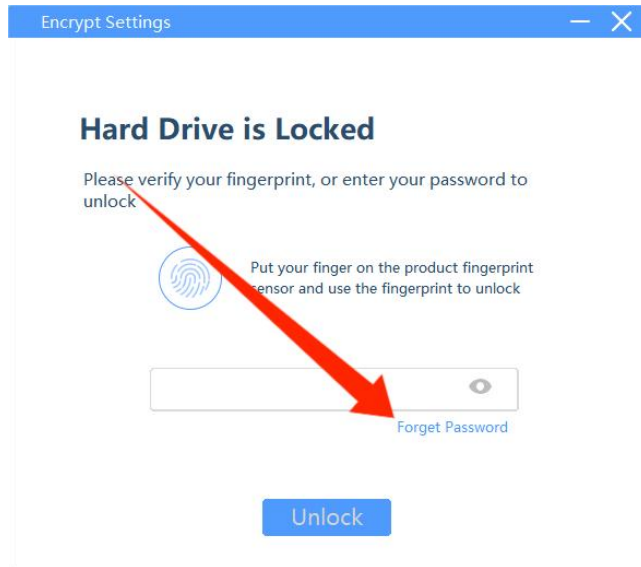

**참고: 소프트웨어를 설치하기 전에 위에서 언급한 모든 기능을 사용할 수 있어야 합니다.**

