



HI6ID-280W LED GROW LIGHTS

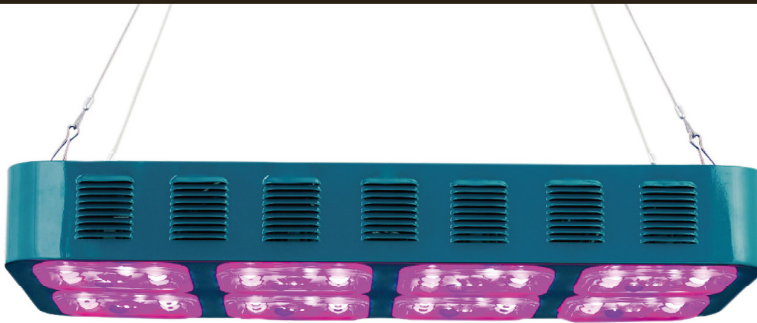


Application

Installed by qualified electrician:

◆ Dimensions

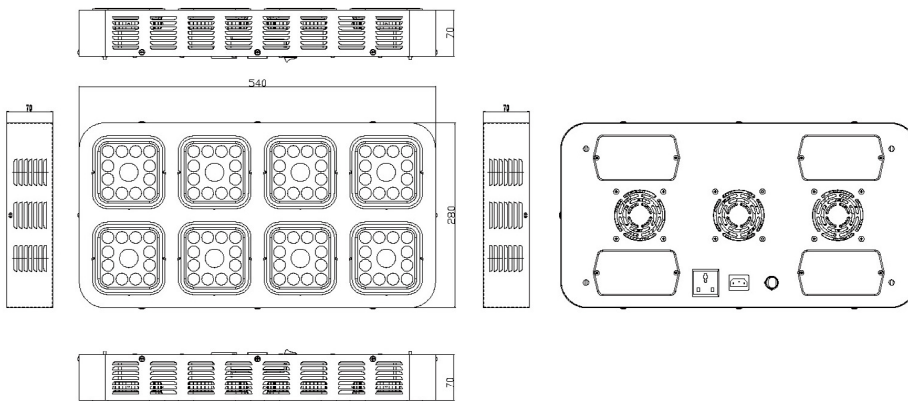

◆ Connection

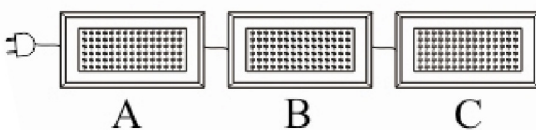


1. Maximum can connect 3pcs
2. Total power cannot exceed
110V:A+B+C≤800W
220V:A+B+C≤1200W

◆ Technology Parameter

Optical Parameter		Electrical Parameter		Others	
Emitting Colors	Red.Full spectrum.Blue	Input Voltage	100~240V	Lamp Color	Gray
Wavelength	Full spectrum:660nm:470nm: 640nm:440nm:460nm:630nm =4:2.2:2.2:1.7	Input Current	0.5732A	Fixture Size	L540*W280*H70 MM
Emitting Angle	120°	Output Voltage	100~130V	Inside Packing Size	No
The two lens light angle	120°	Output Current	500mA	Out Packing Size	L630*W340* H150MM/PCS
LED Qty	160PCS	Output Power	270±10W	Net Weight	4.8kg
LED Life	50000H	Power Factor	>0.9/220V	Gross Weight	6.2kg
Luminous Flux(LM)	10563.2lm	Environment temperature	-20~50°C	Product temperature	<55°C

◆ Installation Instructions

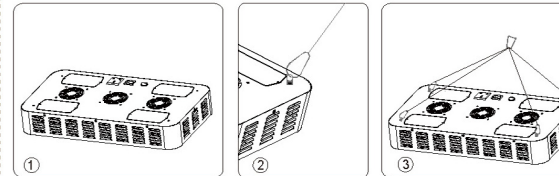

- 1) From figure 1 to figure 2, connect the suspension wire to the corresponding screw mount.
- 2) Figure 3, put the other end of all the suspension wires to the hooks together.
- 3) Hang from suitable mounting hook on the building structure.

◆ Replacement Instruction



Replace Power Supply

Replace Light-Module

◆ Notes:

- 1) Please read the manual before installation, confirm the lighting environment.
- 2) Please confirm the power supply before use.
- 3) When the product is connected to a power source, make sure the power switch is in the off state.
- 4) When this lamp is operating, do not touch the surface.
- 5) The lamp is only for indoor use.
- 6) Illegal operation may damage your goods, and even endanger the life.

CE, RoHS Certificated.
Product complies with UL/FCC etc.
Safety standards.

