


# STEPHILL<sup>®</sup> GENERATORS

Designed and Built in the UK



Rating	Model	Engine
2.7KVA Petrol Generator	2700HMS	POWERED by <b>HONDA</b>

GENERATOR SPECIFICATION	
Frequency	50Hz
Phase	Single
Voltage	230/115
Power	2.7kVA / 2.2KW
Alternator	NSM K100C
Type	Brushless Maintenance Free
Regulation	Mechanical
Protection Class	IP23
Insulation Class	H
Fuel tank capacity	3.6 Litres
Autonomy 75% load	3.6hr
LWA	95
DBA @ 7M	70

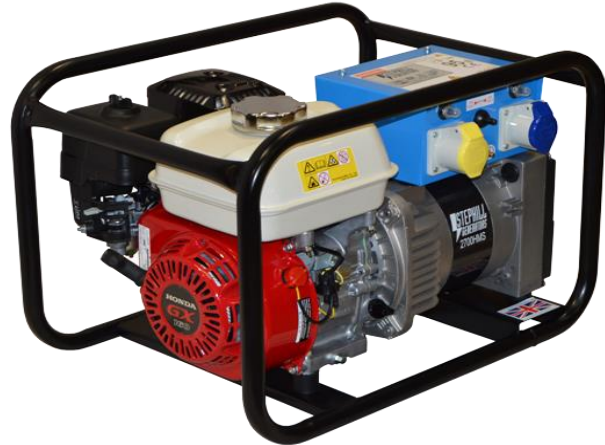

ENGINE SPECIFICATION	
Engine	Honda GX160
Emissions	N/A
Distribution	O.H.V.
Cylinders	1
Cooling	Air
Start	Recoil
Fuel	Petrol unleaded
Rpm	3000
Oil Capacity (L)	0.6
Oil Alert/Low Oil Shutdown	Yes

3 Year Engine Warranty (Limited)



OPTIONS
Single Voltage
LPG Conversion
Electric Start
Long Run Tank (Metal)
Trolley Kit
AVR (Automatic Voltage Regulator)

DIMENSIONS (mm)			
Length	Width	Height	Weight KG
610	420	410	34

CONTROL BOX (METAL)
Push Button MCB Overload protection
1 x 230V 16A BS4343 Socket
1 x 115V 16A BS4343 Socket
Voltage Selector Switch

Stephill Generators Ltd reserve the right to change any of the characteristics stated without notice, in a constant effort to improve the quality of its product

**Stephill Generators Ltd**  
Wallis Close  
Park Farm South  
Wellingborough  
Northants  
NN8 6AG

Phone : :+44 (0)1933 677911  
Fax : :+44 (0)1933 677916  
E-mail : [info@stephill-generators.co.uk](mailto:info@stephill-generators.co.uk)  
Web : [www.stephill-generators.co.uk](http://www.stephill-generators.co.uk)

Date of Issue :- Sept 2015