MOVO



Instruction Manual

Thank you for purchasing Movo VXR10!

The Movo VXR10 is a cardioid microphone, which specially design to improve the sound quality of videos on the basis of build-in microphones.

With both TRS cable and TRRS output cable included, it can be used on smartphones, cameras, camcorders, audio recorders, PCs, and other audio/video recording devices.

VXR10 comes out in compact size and light weight aluminium constructure , it will not be a heavy burden while shooting. Plug and play design, no need to worry the battery status. Included inside with a anti-shock mount, which can effectively reduce unwanted vibration, cable and handling noise. Also included a furry windproof shield, which specially used for minimizing the wind and environmental noise for outdoor recording, make sure the sound crystal clear.

Features


Compact on-camera microphone• Compatible with smartphones, DSLR cameras, Consumer

Camcorders, PCs etc.

- Rugged metal construction
- No battery required
- Professional furry windshield included

Specifications

opeenteations	
Transducer:	Electret Condenser
Polar pattern:	Cardioid
Frequency Response:	35-18KHz +/-3dB
Sensitivity:	-42dB +/- 1dB / 0dB=1V/Pa, 1kHz
Signal to Noise Ratio:	76dB SPL
Plug:	3.5mm TRS and TRRS connector
Dimensions:	Φ22*81mm
Net Weight	86g

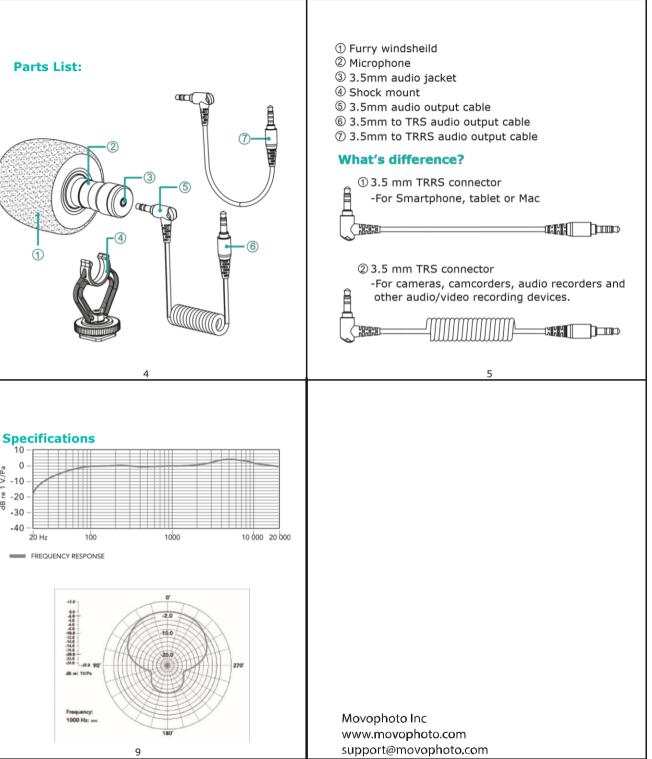

Using the microphone with a Smartphone, tablet or Mac.


Plug the 3.5 mm TRRS connector into the audio 1. jack of your smartphone, tablet or Mac.

Open the audio-only or video recording app and begin recording.



Using the microphone with cameras, camcorders, audio recorders and other audio/video recording devices.

1. Lcok the microphone on the camera hot shoe

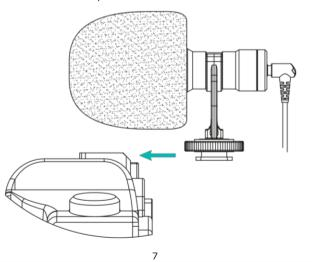

2. Plug the 3.5 mm TRS connector into the audio input jack of your device (audio recorder, amplifier, PC, laptop).

