



RUGGEDGEEK™

WWW.RUGGEDGEEK.COM

USER MANUAL



GEEKBEATS™

Outdoor IP65 Bluetooth Speaker with Power Bank

JOLT5

REV 1.02E



THANK YOU

Thank you for becoming part of the Rugged Geek family. The GEEKBEATS JOLT5 is a high quality Bluetooth™ speaker that also functions as a speakerphone and can charge your USB devices.

The JOLT5 is designed with you in mind. It features high fidelity X-Bass drivers, a 5200mAh Samsung battery, a handy carrying strap, rugged design, USB charging and easy to use controls.


We hope you enjoy it as much as we do!

TABLE OF CONTENTS

Thank You	1
Get To Know Your Awesome Speaker	2
Charging Your Speaker	3
Power On & Get Connected	4
Music & Audio Control	5
Speakerphone	6
USB Charging	7
Specs	8
Trouble Shooting	9
Warnings & Legal	10
Warranty & Support	13


GET TO KNOW YOUR AWESOME SPEAKER

FRONT

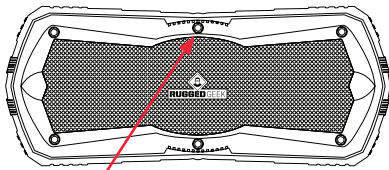

Indicator lights: 4 red, 1 blue
(lights are only visible when lit up)

TOP

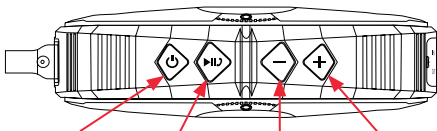


Power Button

Play/Pause/
Answer Call/
End Call

Volume Down/
Skip Back

Volume Up/
Skip Forward

RIGHT

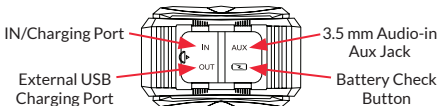

IN/Charging Port

External USB
Charging Port

3.5 mm Audio-in
Aux Jack

Battery Check
Button

CHARGING YOUR SPEAKER

Please fully charge the battery in the JOLT5 before using it for the first time.



To charge the JOLT5, simply plug the included (or any) micro USB charging cable into the IN/Charging Port (accessed by lifting the rubber protective cover) on the speaker and the other end into a powered USB port.

When charging, you will notice the red indicator lights on the front of the speaker will be on. There are 4 red indicator lights in total. The charge level is indicated by the amount of red lights that are lit solid: 1=25%, 2=50%, 3=75%, 4=100%. When fully charged, all 4 red lights will be lit solid. A flashing red light indicates the speaker is still in charging mode.

To see the battery charge level, when the speaker is not being charged, press the “Battery Check Button” on the side of the speaker. This is accessed by lifting the rubber protective cover.

POWER ON & GET CONNECTED

POWER ON

To POWER ON the JOLT5, press the Power Button  for a few seconds. You will see the indicator lights on the front of the speaker turn on and a tone will be emitted to let you know it is on. To POWER OFF the JOLT5, hold the power button  down for a few seconds and you will hear a tone indicating it has powered off.

GET CONNECTED

There are 2 options to get your device connected to the JOLT5 Speaker: Bluetooth™ Pairing or Aux in.




TO connect using Bluetooth™:


1. Activate your phone or device's Bluetooth™.
2. Go to your device's Bluetooth™ settings and ensure it is set to scan for new Bluetooth™ devices.
3. Your device should find the speaker, it will be named "GB_JOLT_5K" click the device name and pair with it.
4. If your phone asks for a pairing code, please enter "0000"
5. After successful pairing, the speaker will make a prompt sound and the LED light will be solid blue.


To connect using a 3.5mm Aux-in cable, simply plug the connecting cable into "Aux-in" port on the speaker and the other end into the Aux-out/headphone port on the playing device.


MUSIC & AUDIO CONTROL

While playing music and other audio through a compatible Bluetooth™ connection, you are able to play/pause, skip tracks and adjust the volume from the speaker itself.

TO ADJUST THE VOLUME: Each single, quick press on the “+”  or “-”  button will increase or decrease the volume. When the volume is at maximum levels, a “beep” sound will be emitted with each press of the “+”  button.

TO SKIP TO NEXT TRACK: Press the “+”  button for 3 seconds continuously.

TO SKIP TO THE PREVIOUS OR EARLIER TRACKS: Press the “-”  button for 3 seconds continuously.


TO PAUSE PLAYBACK: Press the “PLAY/PAUSE” button , press again to resume playback

NOTE: Play/Pause and Skip functions are only available when connected to compatible Bluetooth™ devices. Only the volume controls work when connected with the 3.5mm cable.




SPEAKERPHONE

Your JOLT5 speaker can also function as a hands free speakerphone when connected to a compatible Bluetooth™ phone.


ANSWERING A CALL

If a call comes in, simply press the “play/answer call button”  to accept the call. If you answer the call on your phone instead, some phones may send the call through your phone instead and then you would have to manually select the JOLT5 as the audio source for the call to switch it over.

TO ADJUST THE VOLUME

Each Single, quick press on the “+”  or “-”  button will increase or decrease the volume. When the volume is at maximum levels, a “beep” sound will be emitted with each press of the “+”  button.

ENDING A CALL

To end a call, press the “play/answer call button”  or press the end call button on your mobile phone. Once the call has ended, your music will resume playing if your mobile phone allows this feature.

USB CHARGING

The JOLT5 is designed to charge USB devices that draw from 0.3A – 1A (Most cell phones. Some tablets and devices requiring 2A may not be able to be charged by your JOLT5 speaker).

TO USE USB CHARGING:

1. POWER ON the JOLT5
2. Plug the USB power cable that came with the device you want to charge into the USB port on the side of the JOLT5 speaker. (Accessed by lifting the protective rubber cover)
3. Plug the other end of the cable into the device you want to charge.

SPECS

BATTERY TYPE: Lithium-Ion

BATTERY CAPACITY: 5,200 mAh @ 3.7v / 19.2 Wh

BATTERY CYCLE LIFE: 1000+

PLAY TIME: ≈ 24 hours (varies by volume level and audio content)

DRIVERS: 10W (5W per channel)

FREQUENCY RESPONSE: 160Hz-20KHz

OPERATING TEMPERATURE: -22°F (-30°C) – +122°F (+50°C)

INPUT (CHARGING) VOLTAGE: 5V / 1A

OUTPUT (USB CHARGING): 5V/1A

BLUETOOTH™ RANGE: 33ft/10m (line of sight)

SIZE (L X W X H): 7.1" (18cm) x 2.9" (7.5cm) x 2.2" (5.5cm)

WEIGHT: 15.9 oz (450 gm)

TROUBLESHOOTING

PROBLEM	SOLUTION
My mobile device does not detect the speaker?	<ul style="list-style-type: none">a) Make sure the Speaker is in pairing mode and Bluetooth™ is turned on on your device.b) Make sure you are within range of the speaker.c) Check that the device that you are attempting to pair with is Bluetooth™ compatible.
The signal is cutting out	A Bluetooth™ signal can be affected by objects that are in the path of the playing device and the speaker.
I can't hear anything from my speaker	<ul style="list-style-type: none">a) Volume levels can be controlled independently, both on the speaker and the Bluetooth™ source device. Check the volume levels on both devices to ensure that they are turned up.b) If using the 3.5mm aux cable, check that the cable is properly connected on both ends.

WARNINGS & LEGAL SAFETY INFORMATION

WARNING: PLEASE READ THESE SAFETY WARNINGS AND CAUTIONS CAREFULLY TO ENSURE YOUR PERSONAL SAFETY AND PREVENT PROPERTY DAMAGE.

FIRE AND ELECTRIC SHOCK HAZARD

Do not expose your JOLT5 to liquid, moisture, humidity, or rain. Do not use the JOLT5 near a bathtub, sink, sauna, pool, or steam room. Exposure of the JOLT5 to moisture could result in electric shock.

Do not drop, disassemble, open, crush, bend, deform, puncture, shred, microwave, incinerate, paint, or insert foreign objects into the JOLT5. Such actions could result in electric shock and will void your warranty.

CLEAN THE JOLT5 ONLY WITH A DRY CLOTH

Do not expose your JOLT5 to extremely high or low temperatures.

Do not leave your JOLT5 in direct sunlight for extended periods of time.

Do not leave your JOLT5 near open flames such as cooking burners, candles, or fireplaces.

BATTERY/CHARGER HAZARD

Do not dispose of your JOLT5 in a fire. The battery could explode causing injury or death.

Only charge the battery in accordance with the user instructions supplied in this manual using an appropriate micro-usb charging cable.

Do not attempt to disassemble the JOLT5 charger or force open the built-in battery because this may result in electric shock.

Do not attempt to disassemble the JOLT5 or force open the built-in battery because this may result in electric shock. There are no user serviceable components in this device.

AUTOMOBILE ACCIDENT HAZARD

Do not leave or store the JOLT5 or any of its accessories near or over your automobile's air bag because serious injury may result when an air bag deploys.

OTHER HAZARDS

Do not use abrasive cleaners to clean your JOLT5 because this could cause scratches and damage.

Do not bring your JOLT5 in to contact with any sharp objects because this could cause scratches and damage.

Do not attempt to repair, modify, or disassemble your JOLT5 yourself, it does not contain any user-serviceable components. Do not attempt to replace your JOLT5 battery, it is built-in and is not changeable.

Turn off your JOLT5 prior to boarding an aircraft. Do not use the JOLT5 inside an aircraft unless allowed by your airline.

FCC NOTICE

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

WARRANTY & SUPPORT

Rugged Geek ("RG") warrants that its JOLT5 ("The Product") will be free from defects in material and workmanship for a period of twelve (12) months from the date of purchase (the "Warranty Period"). For defects reported during the Warranty Period, RG will, at its discretion, and subject to RG's technical support analysis, either repair or replace any Product sold by RG that contains such a defect. Replacement parts and products will be new or serviceably used, comparable in function and performance to the original part and warranted for the remainder of the original Warranty Period.

THE FOREGOING LIMITED WARRANTY IS IN LIEU OF AND EXCLUDES ALL OTHER WARRANTIES NOT EXPRESSLY SET FORTH HEREIN, WHETHER EXPRESS OR IMPLIED BY OPERATION OF LAW OR OTHERWISE, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

RG'S LIABILITY UNDER THIS LIMITED WARRANTY IS EXPRESSLY LIMITED TO REPLACEMENT (IN THE FORM AND UNDER THE TERMS ORIGINALLY SHIPPED), OR TO REPAIR, WHETHER SUCH CLAIMS ARE FOR BREACH OF WARRANTY OR FOR NEGLIGENCE. RG SHALL NOT BE LIABLE FOR ANY INCIDENTAL, CONSEQUENTIAL, OR SPECIAL LOSSES, DAMAGES OR EXPENSES OF ANY KIND, INCLUDING, WITHOUT LIMITATION, ANY SUCH LOSSES, DAMAGES, OR EXPENSES ARISING DIRECTLY OR INDIRECTLY FROM THE SALE, HANDLING, OR USE OF THE PRODUCT FROM ANY OTHER CAUSE RELATING THERETO, OR FROM PERSONAL INJURY OR LOSS OF PROFIT.

Some states do not allow the exclusion or limitation of incidental or consequential damages or length of an implied warranty so the above limitation(s) or exclusion(s) may not apply. This Limited Warranty gives you specific legal rights and you may also have other legal rights which vary from state to state.

This Limited Warranty is made to the original purchaser from RG and does not extend to any other person or entity and is not assignable. It is the obligation of the original purchaser to forward the Product, with the proof of purchase, to RG.

As with all batteries, the maximum capacity of any battery included in the RG Product will decrease with time or use, and battery cycle life will vary depending on use, wireless functionality, and charge cycles. Accordingly, a decrease in maximum battery capacity or battery cycle life is not a defect in materials or workmanship, and this RG Limited Warranty does not cover changes in battery capacity or battery cycle life. To the extent permitted by local law, the battery is only warranted against defects in materials or workmanship resulting in failure of the battery to operate for the duration of the Limited Warranty Period.

THE COSTS OF TRANSPORTING PRODUCTS TO RG FOR WARRANTY SERVICE IS THE RESPONSIBILITY OF THE ORIGINAL PURCHASER. THIS LIMITED WARRANTY IS VOID UNDER THE FOLLOWING CONDITIONS:

1. The Product is misused, subjected to careless handling, or operated under conditions of extreme temperature, shock, or vibration beyond RG's recommendations for safe and effective use.
2. The Product has not been installed, operated, charged, or maintained in accordance with approved procedures.
3. The Product is disassembled, altered, or repaired by anyone, except RG.
4. The electrical connections to either the charging input or the USB output are modified.
5. The Product is subject to improper storage or accidental damage.
6. The original purchaser fails to provide the original bill of sale.

THIS LIMITED WARRANTY DOES NOT COVER:

1. Normal wear and tear.
2. Cosmetic damage that does not affect functionality.
3. Products where the purchase date is undeterminable.

For additional warranty information and to register your product, please visit our website at WWW.RUGGEDGEEK.COM and click on "Support". You may also email us directly at MAKEMEHAPPY@REGGEDGEEK.COM



RUGGEDGEEK™

TO CHECK OUT OUR OTHER
COOL PRODUCTS OR FOR
ADDITIONAL PRODUCT USAGE
INFORMATION AND VIDEOS
PLEASE VISIT:

WWW.RUGGEDGEEK.COM