


Luci® Connect

Instruction
manual

MPOWERD®

Getting to know Luci

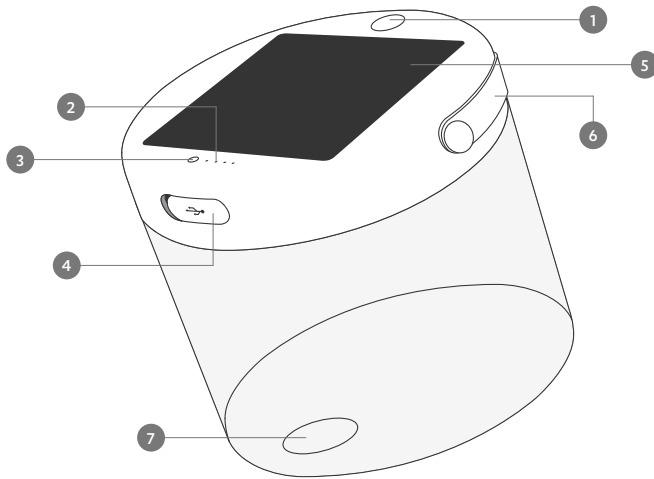

1. Power button
2. Battery level indicator
 - 1 light = 0-20%
 - 2 lights = 21-40%
 - 3 lights = 41-60%
 - 4 lights = 61-100%
3. Battery level indicator button
4. Built-in USB port
5. Solar panel
6. Adjustable strap
7. 2-way valve

Charging

Charge via solar

- With solar panel side up, place in direct sunlight for up to 14 hours for a full charge.
- Press battery level indicator button at any time to check battery level. See illustration above for more info.

Charge via USB

- Insert the USB cord provided into the USB port on the base panel, and then insert the other end into a USB outlet for 2-3 hours.
- Ensure the cord is firmly in position and check that the Battery Level Indicator lights are flashing - this means it's charging.

Charging devices

- To charge your device from the light, simply insert your charging cable at the USB end into the USB port on the light, and then plug the other end of the cable into your device. Power up!

How to use

Inflate

- Firmly pinch the 2-way valve and pull away from base. This will do 50% of the inflating.
- Firmly pinch valve and blow into the nozzle until fully inflated. Push in the valve, and you're all set!

Deflate


- Pull out the valve, firmly pinch valve and simultaneously collapse towards the base.
- Gently twist the light as you deflate for a flatter, more compact shape.
- Close tab on valve when fully deflated.

Shine

- Press power button to turn unit on.
- 1 click to activate, 2 clicks for white, 3 for red, 4 for blue, 5 for green, 6 for orange, and 7 clicks to turn off.

USB Port

- A. Lift cap to reveal port
- B. Two-way USB port for charging the light, or charging your devices

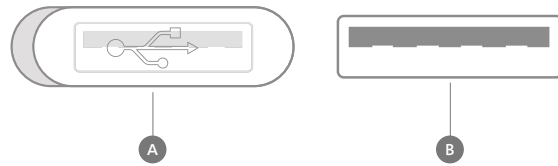

Getting to know the app

Getting started

- Before you can connect and control light from your phone, the physical product must be turned on. This activates Bluetooth® pairing. If light is turned off via physical product, Bluetooth pairing deactivates.
- Press once to turn on white light. Keep pressing to cycle through the 5 pre-set color modes.

Pro tip: After the first time you turn the light on, you can turn on / off via the app for your convenience!

How to connect

- Download the MPOWERD app from the App Store or Google Play.
- Make sure your Bluetooth is on.
- Follow the on-screen prompts.

Control brightness

- Move slider to see real-time light changes.
- See estimated battery run-time change as you adjust.

Change colors

- Tap the color wheel to change light color.
- Save selected color by tapping + .
- To delete: press, hold, and drag saved color to trash can.

Create moods

- Select your colors, choose the brightness, and name the mood.
- Save multiple personalized moods.
- Comes with 2 built-in presets moods.

Set a schedule

- Program personalized light setting to turn on & off at a specific time.
- Save multiple schedules.
- Set a countdown timer.

Frequently asked questions

What is direct sunlight?

Direct sunlight means that the sun's light is directly hitting the solar panel. For example, if you were standing outside under the sun with nothing obstructing you and the sun, then you would be in direct sunlight. If you were standing inside, you would be getting indirect sunlight but no direct rays from the sun. Solar panels always need direct sunlight to charge. If in doubt, think of it this way; if you were Luci and you were able to directly see the sun, then you would be in direct sunlight!

It's cloudy, will my light still charge?

Yes, but it will charge at a slower rate than on a bright, clear day. As your Luci charges via the red and violet frequencies of visible light, the charge times will vary based on the UV index or overcast skies. Generally speaking, the higher the UV index, the faster the charge.

Will my light charge under indoor lighting?

The sun generates significant red and violet frequencies (which charge your Luci), whereas your ordinary indoor lights emit a tiny fraction of that UV. We recommend you go straight to the source and put your Luci directly in the sunlight from a window sill or, for the best results, outside! Luci is durable and completely waterproof.

How do I connect to my Luci?

When you open the app for the first time, simply follow the on-screen prompts to connect your Luci. If it isn't your first time opening the app or if you want to connect another light there are two ways to connect your Luci. The first is to tap on the text below the MPOWERD ring (top center). This will expand the section where you can connect a new Luci by tapping "Add light". This will then take you through a set of prompts to connect! The additional way to connect your Luci is to tap on the burger menu in the top left of the screen. From here you will tap the "My lights" section, and then tap the "Add light" button at the bottom of the screen. From here you will follow the prompts to connect.

What is the Bluetooth distance range?

This depends on your surroundings, but generally the range is 20-30 feet.

How do I activate Bluetooth?

To activate Bluetooth pairing you will need to press the power button on the product once. If the light is turned off via physical product, Bluetooth pairing deactivates.

What's the difference between charging the light via USB or the solar panel?

Speed! Charging via USB is ~6x faster than via solar due to the input power. Whether charging via solar or USB however, the outcome remains the same - a full battery charge. Our advice is to charge via solar for a natural source of power, but if you're in a pinch, charge via USB.

Can my light be left outside?

Yes! In fact, our products love being outside in the open. Luci is durable and completely waterproof. This means you don't need to go running to bring them in when it rains. Luci: 1, laundry: 0.

Can I charge a device and use my light simultaneously?

Yes, we love multi-taskers! You should be aware though, that as you're charging your device, you are depleting the battery in the light. We recommend checking the battery level of the light frequently to make sure that you have enough charge to last throughout your activity.

Can I control multiple lights at the same time?

Yes, if you create a group you can sync up multiple lights and control them at the same time! You aren't able to group a Luci Connect and Luci Explore together due to the fact that they have different capabilities.

Can I rename my light in the app?

Absolutely. To rename, simply tap on the burger menu in the top left of the screen and select "My lights". From here you will tap on the product that you want to rename, tap rename, and then rename it! Save your work in the top right of the screen and you've given your Luci a brand new name!

We're here for you. For the full list of FAQs and troubleshooting, go to mpowerd.com/faq.

MPOWERD®