



The incredibly fast completely wireless battery powered mobile scanner.


FUJITSU









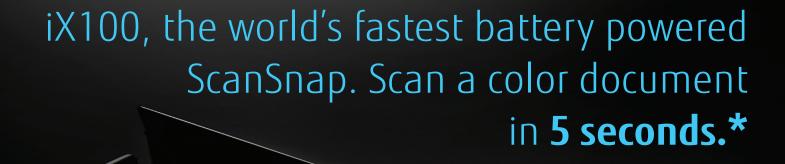

**Lightweight**Only 400g (14.1 oz.)

### Power on the Move

Rechargeable Lithium Battery.

### Wi-Fi and USB Connectivity

Scan wirelessly to your PC, Mac and mobile devices.

\*Single-side color Letter document scanned at 300 dpi.

#### Wireless scanning anywhere, anytime

The ScanSnap iX100 can automatically detect your Wi-Fi network at home, in the office or on the go. With *Direct Connect* mode you can scan wirelessly beyond your network.



#### **Built-in GI microprocessor**

A dual-core CPU-mounted "GI" processor performs the intelligent image enhancement responsible for great looking images with dramatically faster results and more sophisticated connectivity:

- Image processing: Automatic corrections and image output
- Supports Wi-Fi: 2.4GHz, WPS (Wi-Fi Protected Setup), Wireless LAN (IEEE802.11b/g/n)

#### Intelligent automated features

Like all ScanSnap scanners the iX100 features a powerful set of automated image processing functions including auto color detection, crop & deskew, and blank page removal.



# ScanSnap ixioo



#### Easily synchronize documents to the cloud

iX100 provides users a convenient way to scan directly to your existing Evernote, Dropbox, Google Docs, SugarSync and Salesforce accounts.\*



#### **Scan there!** ScanSnap Folder

Scan to virtually any application or web service that can open, insert or attach a PDF or JPEG file from your Windows\* computer.



#### Organize business cards

Use the included CardMinder software for Mac and PC to scan, store, and edit business card information and export data into applications like Address Book, Excel, and Salesforce.

\*Wi-Fi connection required. Service fees may apply.

#### New features for quick digitization



#### Dual scan

Scan two small sized documents, such as business cards or receipts at the same time. Simply insert documents continuously to reduce your scanning time.

# Automatically stitch together a two-page spread

Even charts and diagrams larger than Letter

can be scanned. Just fold it in half, scan both sides and the iX100 will automatically stitch it back together.

#### Two selectable paper paths


#### Straight path


Most suitable for scanning post cards, business cards, plastic cards, and thick stock paper.

\*This applies to standard ISO 7810 ID-1 card types.

#### U-turn path

Most suitable for scanning common office paperwork especially in a tight or cluttered environment.







ScanSnap Organizer

Scan to CardMinder

to Scan to Folder





Scan to E-m

Docs(TM)



Scan to Mobile Scan to Scan to Scan to Evernote (Doc... Evernote (Note)







ABBYY Scan to

\*Quick Menu for Windows\* shown

#### Fast and flexible Quick Menu

The Quick Menu for PC and Mac automatically pops-up after scanning to provide you with a variety of ways to immediately process your scans. It can be customized to display just your favorites, present a recommendation, and even display custom profiles.

## Generate Microsoft<sup>®</sup> Word, Excel<sup>®</sup> and PowerPoint<sup>®</sup> files

ABBYY FineReader for ScanSnap lets you scan and convert paper documents into Word®, Excel® and PowerPoint® files.

Only Microsoft® Word and Excel® are available for Mac OS. Generated images and text may vary from the original.

#### Continuous Document Feeding (CDF)

The Continuous Document Feeding function allows you to insert pages one after another by detecting when a sheet enters and exits.



Set your document face-up into the iX100 and push the Scan button.



The iX100 proceeds to scan the front side.



The page exits from the top of the scanner when paper path is set to U-turn.



Re-insert the page without pressing the Scan button to scan the other side.



After you finish scanning, press the Scan button to save file.

#### **■** General Specifications

■ General Specifications			
Description		ScanSnap iX100 / PA03688-B002	
Scanner type		CDF (Continuous Document Feeding), Simplex sheetfeed two-way paper path (Straight path, U-turn path)	
Scanning mode	s	Color, grayscale, monochrome, automatic (color / grayscale / monochrome detection)	
Image sensor		CIS (Contact Image Sensor) x 1	
Light source		3 Color LED (Red / Green / Blue)	
Optical resolution	on	600 dpi	
	Auto mode (default) *2		
Scanning	Normal mode (150 dpi)	E accorde / none	
speed *1	Better mode (200 dpi)	5 seconds / page	
(Letter portrait)	Best mode (300 dpi)		
	Excellent mode (600 dpi)	20.4 seconds / page	
Document size	Normal mode	A4, A5, A6, B5, B6, Business card, Post card, Letter, Legal and Custom sizes (Max: 216 x 360 mm (8.5 x 14.17 in.), Min: 25.4 x 25.4 mm (1 x 1 in.) / Automatically recognizes document size	
	Normal mode with Carrier Sheet	Use of a Carrier Sheet permits the scanning of A3, B4, double letter and photographs as well as the document sizes that are listed above.	
	Long paper scanning *4	Max: 216 x 863 mm (8.5 x 34 in.) (300 dpi or less)	
Paper weight (Thickness)		<ul> <li>52.3 to 209.3 g/m², or 14 to 56 lb (Straight path)</li> <li>52.3 to 80 g/m², or 14 to 20 lb (U-turn path)</li> <li>Card: Portrait or Landscape (Straight path) Non-embossed: 0.76 mm or less Embossed: 0.76 + 0.48 mm (ISO7810 Conforming)</li> </ul>	
Paper setting		Front-side up	
Continuous scanning		260 sheets (Letter, color, simplex, 300 dpi, battery operated) *5	
Interface *6		USB 2.0 (USB 1.1 compatible)	
Power source		Li-ion Battery (3.7 V / 720 mAh)	
Power requirem	ent	5 V / 0.5 A ( x 1port)	
Power consumption *7		During operation: 4.7 W or less During sleep mode: 2.2 W or less During Auto Standby (OFF) mode: Less than 0.5 W	
Operation environment		Temperature: 5 to 35 °C (41 to 95 °F) Relative humidity: 20 to 80% (Non-condensing)	
Dimensions (W x D x H) *8		273 x 47.5 x 36 mm (10.74 x 1.87 x 1.42 in.)	
Device weight		400 g (0.88 lb)	
Environmental compliance		ENERGY STAR® compliant/RoHS	
Multifeed detection		None	
Driver		ScanSnap specific driver  • Windows®: Does not support TWAIN / ISIS®  • Mac OS: Does not support TWAIN	

\*1 Scanning speeds may vary due to the system environment used. Scanning speed measured from "start feeding document" to "finish output document" after pre-pick and pressing scan button (not including warm-up time). Warm-up time is less than 2 seconds (or less than 3 seconds from chute cover closed). \*2 Documents measuring approximately 148 mm in length or less are scanned in "Best mode", while other documents are scanned in "Better mode", \*3 Automatically stitch a two-page spread when scanning a folded A3, B4 or double letter size document one side at a time. The image is automatically stitched only if texts or diagrams cover across the two-page spread, \*44 The IXTOO is capable of scanning documents that exceed A4 size in length. This function is available for all modes except for "Excellent mode". \*5 The number of sheets that can be scanned when connected to a computer via Wi-Fi with a fully charged battery. The number of sheets may vary due to the system environment used, usage method and repeated charging, \*6 Computer with USB 3.0 will work as USB 2.0 guaranteed only with USB cable provided with product. \*7 When operating with battery. \*8 When chute is closed.

#### ■ Software

	Windows <sup>®</sup>	Mac OS	
Driver *1	ScanSnap Manager V6.3 (TWAIN / ISIS™ not supported)	ScanSnap Manager V6.3 (TWAIN not supported)	
	ScanSnap Organizer V5.2	ScanSnap Organizer V1.1	
CardMinder™ V5.2		CardMinder™ V5.2	
Applications	ABBYY FineReader for ScanSnap™ 5.0	ABBYY FineReader for ScanSnap™ 5.0	
	Scan to Microsoft® SharePoint® 3.4	-	

★1 TWAIN or ISIS™ applications cannot be used directly.

#### **■** Included items

Getting started
 Set-up DVD-ROM
 USB cable

This scanner is designed to digitize materials that can be reproduced lawfully, in accordance with applicable copyright regulations and other laws. ScanSnap users are responsible for how they use this scanner. It is imperative that ScanSnap users comply with all applicable local rules and laws, including, without limitation, copyright laws when using this scanner.

Users comply with all applicable local rules and laws, including, without limitation, copyright laws when using this scaliner.

@2014 Fujitsu Canada, Inc. All rights reserved. Fujitsu and the Fujitsu logo are registered trademarks of Fujitsu Limited. \*ABBYY and FineReader are trademarks of ABBYY Software, Ltd. which may be registered in some jurisdictions. ABBYY\*\* FineReader\*\* Engine @2011 ABBYY. OCR by ABBYY. \*Evernote is a registered trademark or trademarks of Evernote Corporation. \*Google and Google Docs are registered trademarks or trademarks or strademarks of Intel Corporation in the United States and other countries. \*#ISIS\* is a registered trademark of EMC Corporation in the United States. \*Mac. Mac OS, Mac logo and iPhoto are trademarks of Apple Inc. \*#Microsoft, Windows, Windows Vista, Excel, PowerPoint and SharePoint are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. \*#ISIS\* is a registered trademark of the products of Microsoft Corporation in the United States. \*\*PowerPo! is a registered trademark of International Business Machines Corporation in the United States, other countries, or both. \*\*Salesforce and Salesforce CRM are registered trademarks or trademarks of salesforce.com, inc. in the United States and other countries, \*\*ScanShap logo, ScanShap Manager, ScanShap Organizer and CardMinder are registered trademarks or trademarks of trademarks or trademarks of the respective companies. Specifications are subject to change without notice. All statements herein are based on normal operating conditions, are for informational purposes only, and are not intended to create any implied warranty of merchantability or fitness for a particular purpose. DS405000701

#### For more ScanSnap related information, visit our Web site at: http://scansnap.ca

Be sure to carefully read all safety precautions prior to using this product and use this device as instructed.

Do not place this device in wet, moist, steamy, dusty or oily areas. Using this product under such conditions may result in electrical shock, fire or damage to this product.

#### ■ ScanSnap iX100 System Requirements

#### Windows®

Compatible operating systems		Windows® 8 / 8.1 (32-bit / 64-bit)	Windows® 7 (32-bit / 64-bit)*1	Windows Vista® (32-bit / 64-bit)*2
Driver / Applications *3	ScanSnap Manager V6.3	Supported	Supported	Supported
	ScanSnap Organizer V5.2	Supported	Supported	Supported
	CardMinder™ V5.2	Supported	Supported	Supported
	ABBYY FineReader for ScanSnap™ 5.0	Supported	Supported	Supported
	Scan to Microsoft SharePoint 3.4	Supported	Supported	Supported
	CPU*5	Intel® Core™ i5 2.5 GHz or higher		
Hardware requirements *4	Memory capacity *5	4 GB or more		
	Display	1,024 x 768 pixels or higher	800 x 600 pixels or higher	
	Disk capacity *6	2,690 MB or more of free hard disk space		disk space
	DVD-ROM drive	Required for installation		on
	USB port *5*7	USB 2.0 / USB 1.1		

\*1 Service Pack 1 or later required. \*2 Service Pack 2 or later required. \*3 Operating systems listed in this table are the only ones supported. Please refer to the ScanSnap Web site for latest support information. \*4 The ScanSnap device may not work if the connected computer does not meet this requirement. \*5 Scansing speeds may drop if recommended CPU, memory capacity and USB requirements are not met. \*6 Microsoft .NET Framework 3.5 SP1 will be installed (requires 500 MB of disk space) together with either ScanSnap Manager or ScanSnap Organizer for systems that do not have .NET Framework 3.5 SP1 installed. \*7 When the ScanSnap is connected to a USB 3.0 port, the port operates as a USB 2.0 port. \*Bystem smay change depending on the duration of support and the support policy of the companies that make the software listed in the table above.

#### Mac OS

Compatible operating systems		OS X v10.9 *1	OS X v10.8 * 2	Mac OS X v10.7*3
Driver / Applications	ScanSnap Manager V6.3	Supported	Supported	Supported
	ScanSnap Organizer V1.1	Supported	Supported	Supported
	CardMinder™ V5.2	Supported	Supported	Supported
	ABBYY FineReader for ScanSnap™ 5.0	Supported	Supported	Supported
Hardware requirements	CPU*6	Intel® Core™ i5 2.5 GHz or higher		
	Memory capacity *6	4 GB or more		
	Display	1,024 x 768 pixels or higher		
	Disk capacity	1,930 MB or more of free hard disk space		
	DVD-ROM drive	Required for installation		
	USB port*6*7	USB 2.0 / USB 1.1		

\$1 OS X v10.9.1 or later recommended. \$2 OS X v10.8.5 recommended. \$3 Mac OS X v10.7.5 recommended. \$4 Operating systems listed in this table are the only ones supported. Please refer to the ScanSnap Web site for latest support information. \$5 The ScanSnap device may not work if the connected computer does not meet this requirement. \$6 Scanning speeds may drop if recommended CPU, memory capacity and USB requirements are not met. \$7 When the ScanSnap is connected to a USB 3.0 port, the port operates as a USB 2.0 port. \$System requirements may change depending on the duration of support and the support policy of the companies that make the software listed in the table above.

#### ■ Options

Description	Part number	Remarks
AC adapter	PA03010-6571 USA, Canada & Taiwan	Intended for ScanSnap iX100
ScanSnap iX100 Case *1	PA03688-0001	
ScanSnap iX100 Soft Case *1	PA03688-0011	Intended for ScanSnap iX100
ScanSnap Carrier Sheets *2 PA03360-0013		5 Carrier Sheets Intended for ScanSnap iX500, iX100, S1500, S1500M, S1100i, S1100

\*1 This product has been especially designed for storing and carrying ScanSnap iX100. Please note that this product is not guaranteed to withstand damage by excessive shock or external pressure. \*2 Although ScanSnap Carrier Sheets have a listed lifespan of 500 scans, the lifespan may vary with usage. ScanSnap Carrier sheets are intended to scan paper documents with weights of 127 g/m² or less. They also support the scanning of folded documents that are as large as 216 x 297 mm.

#### **■ Consumables**

Description	Part number	Remarks
Cleaner F1	PA03950-0352	100 ml bottle Used to clean rollers





This product is a green product and Fujitsu promotes recycling for the scanner. PFU LIMITED, a Fujitsu company, has determined that this product meets the ENERGY STAR® guidelines for energy efficiency. ENERGY STAR® is a registered trademark of the United States.

