



PARIA
OUTDOOR PRODUCTS

HIGH
200
Lumen

USB
Recharge

COMET
LED HEADLIGHT

QUICK GUIDE

Thank you for purchasing the COMET LED headlamp..

Please read the instructions manual carefully before the initial use.


Safety Warnings

Do not look directly into the light beam or shine into eyes of others.
Do not attempt to remove electronics. Doing so will void the warranty.

Caution:

1. The headlamp will become warm during prolonged use. This is normal and the heat will dissipate when the light is turned off.
2. To avoid the battery being totally discharged, it is recommended to charge the headlamp periodically.

- + Powerful 200 lumen in a compact size
- + 90° Rotate Angle to adjust lighting angle
- + 4 Lighting Modes
- + 2 Lighting Colors (White / Red)
- + Battery: 700 mAh
- + Type-C Charging (cable included)
- + Charging Status Indicator
- + Memory mode
- + Water Resist IPX4 (can tolerate rain & inclement weather)

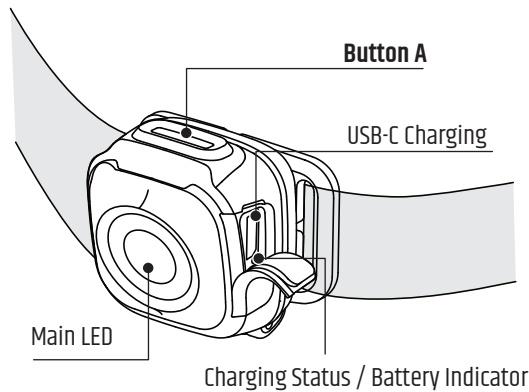

HOW TO OPERATE

ON / OFF

1. Press and hold **Button A** for 2 seconds to turn the headlamp on / off.
2. When the headlamp is turned ON, it will enter **MEMORY** mode.

Change Lighting Color and Mode


1. Press **Button A** to select LED color and brightness
Low > Mid > High > Red



Mode Memory

1. The headlamp will recall the current output Mode when it is switched OFF. When turning the headlamp back ON, the mode will automatically be set to the same mode when the headlamp was turned OFF.

How to Recharge Battery

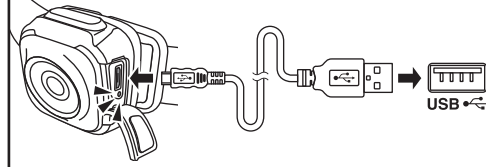

Open the sealed USB-C connector compartment by carefully prying the rubber gasket. Plug in the provided USB-C cable and connect the other end to a power source. The light will indicate charging status as follows:


Red Light (Flash) : Charging Green Light (Steady) : Fully Charged

Charging Status Indicator

1. When the headlamp is connected to battery source, the following will indicate its charging status:
100% - Battery Indicator - Steady Green Light
Charging - Battery Indicator - Flashing Red Light

Quick Battery Check Indicator

1. Press button A in OFF mode to display battery level for 3 seconds
> 66 % - Battery Indicator - Steady Green Light
33-66 % - Battery Indicator - Flashing Green Light
< 33 % - Battery Indicator - Steady Red Light



ROTATE
ANGLE

200

MAX LUMEN



Type-C
RECHARGE

700

mAh



MODE
MEMORY



CHARGING STATUS



IPX4
WATER SPLASH



QUICK BATTERY
CHECK INDICATOR



The specified lumen values are measured 30 seconds after switching the lamp on. We measure lumen according to the ANSI / NEMA FL1 Standard.