Alarm Clock Camera Case

Compatible with Wyze Cam V3


User Manual



WASSERSTEIN

In the Box








Safety & Warning

- Read and follow the instructions carefully.
- Hidden cameras are prohibited in some countries and regions. Follow any local legislation and policies for installing the camera.
- Use only the provided adapter to power the product.
- This product is for indoor use only.
- Do not dismantle the product yourself for any reason.
- Keep this product away from any heat source, including direct sunlight.


Introduction to Parts

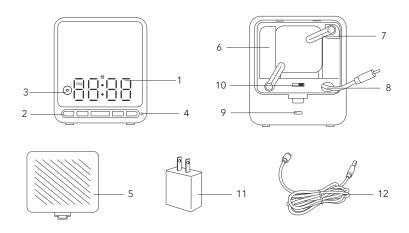

- 1. Clock display
- 2. Settings buttons
- 3. Built-in infrared light
- 4. Light sensor
- 5. Back cover
- 6. Camera compartment
- 7. Camera pushers
- 8. Power cable
- 9. USB-C power socket
- 10. Infrared light switch
- 11. Power adapter
- 12. Power cable

Clock Setup

- 1. Use the power adapter and cable provided to plug the clock into an outlet.
- 2. All LEDs will turn on and display "0:00" indicating that the clock is ready to be set up.




3. To set the time, press and hold the "CLOCK" button until the display is flashing, use "+/-" button to adjust the digit. Press the "CLOCK" button to confirm the setting.



Camera Setup


Note: Setup and pairing are easier before putting the camera into the clock.

1. Remove the back cover and connect the power cable inside the compartment to the Wyze Cam V3.

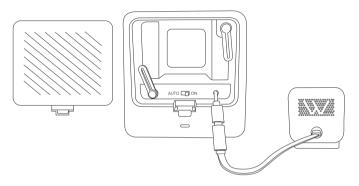


- 2. Follow the camera user guide to pair and set up the camera and connect to the Wi-Fi network. (If your camera has been setup previously, we suggest you reset your camera and update with the latest firmware.)
- Once the camera step up is complete, carefully change the setting in order to operate the night vision inside the clock case.

- 4. Go to the camera settings from the Wyze app (tap the gear icon at the top right). Then go the the "Advance Settings" page and change the following settings:
 - Night vision mode: Auto
 - Night vision IR light: Off
 - Camera Status light: Off

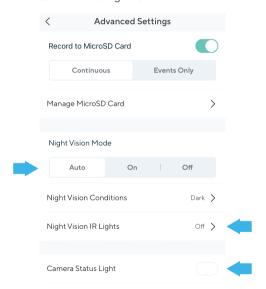

*The look of the settings page may vary depending on different devices and platforms.

5. Insert the camera into the clock, then flip the infrared light switch inside the compartment to "Auto".



Check the image from the app in daylight, as well as in a dark room. If it looks good, lock the camera firmly with the pushers at the top and bottom, and close the back cover.



7. Move the clock to your preferred location.

Alarm Setup

- 1. To set the alarm, press and hold the "ALARM" button until the display starts flashing. Use the "+/-" button to adjust the digit and set the snooze feature. Press the "ALARM" button again to confirm the setting.
- 2. To activate the alarm clock, press the "ALARM" button twice. The alarm clock icon will show up on the display indicating that it is activated.



3. To stop the alarm, press any button except "LIGHT | SNOOZE" when the clock is ringing.

Display On/Off and Brightness

1. To turn off the display, press and hold the "LIGHT | SNOOZE" button for 5 seconds. Press any key to activate the display.



2. To switch the display brightness, press the "+" button when the clock is showing.

Snooze

To delay the alarm clock, press the "LIGHT \mid SNOOZE" button when the alarm is ringing. The snooze timer can be set after setting the alarm clock (default: 05 = 5 minutes).

Troubleshooting

Problems	Possible solution
The clock is not working.	Check the power supply to the clock, make sure the cable and adapter are connected properly.
The camera image is blurry, overexposed, or too dark. Camera recording, motion trigger, and voice recording aren't working.	Make sure to use the correct camera setting from the original manual, and check the image and trigger event before putting it into the clock case.
The camera image is too bright and I cannot see the objects far away.	Make sure there are no objects in front of the clock case reflecting the LED light.
The camera image is dark or out of focus. (See image below)	Make sure the camera IR light has turned off from the Wyze app and the infrared light switch inside the clock is at the "Auto" position.

Specification

Display: LED

Time format: 12 / 24 hrs Snooze: 1-60 mins

Display brightness: Low / High / Off

Power input: DC 5V / 1A

Power cable length: 6.5 ft

Port: USB-C

Product size: 4.13 x 4.72 x 2.75 in

Weight: 7.2 oz

* The actual product and specifications are subject to change without notice due to product enhancement.

Get More Support

Scan the QR code below or email us at contact@wasserstein-home.com.





www.wasserstein-home.com

Made in China