

# DATA SHEET Qt® EMITTER SOUND MASKING LOUDSPEAKER



Qt® Emitters are the backbone of the QtPro™ sound masking system. Qt Emitters are wide dispersion (nearly 180 degrees) direct field loudspeakers with 1.25" (3.17 cm) drivers and are smaller than a coffee mug. Emitters have DIP switches that allow their volume to be reduced 9 dB in 3 dB decrements. Emitters deliver four uncorrelated audio channels, automatically eliminating phasing. Emitters are plenum-rated, UL-listed, and comply with UL 2043. Each Emitter comes standard with a slip-ring mount for acoustical tile mounting. These features, along with plug and play installation and easy configuration capability, make QtPro systems the most intelligently engineered and most effective sound masking systems on the market today.

# **FEATURES**

- Wide dispersion direct field speakers with 1.25"
   (3.17 cm) drivers
- Small driver size results in nearly 180° dispersion of direct field sound masking
- Reduces acoustical interference by using four uncorrelated channels
- DIP switches attenuate the volume level up to 9 dB in 3 dB decrements for easy micro-zoning

- Plug and play installation and easy configuration
- Comes standard with slip ring for acoustical tile mounting
- CE marked, UL listed, and RoHS compliant
- Evaluated to the requirements of UL 2043 and is suitable for use in air handling spaces
- Covered by Biamp Systems' five-year warranty

# **ARCHITECTS & ENGINEERS SPECIFICATION**

The emitter shall consist of a single 1.25" (3.17 cm) full range transducer installed in a sealed airtight enclosure. The enclosure and grill shall be one piece with material meeting UL Standard 2043 requirements for heat and smoke release in accordance with the provisions of the following codes: National Electric Code, NFPA 70; International Mechanical Code, NFPA 5000; Standard for the Installation of Air Conditioning and Ventilating Systems, and NFPA 90A. The emitter shall be provided with internal logic to automatically sequence 4 channels of mutually incoherent masking sound generators when connected with standard CAT type cables. Input and output receptacles shall be standard RJ-45 quick connect network type with positive locking. A twist-and-lock mounting ring shall be provided for quick and secure mounting in ceiling materials. The enclosure shall provide a secondary attachment for a security cable where required by local authorities. Warranty shall be 5 years. The emiiter shall be a Qt® Emitter.

# **Qt EMITTER SPECIFICATIONS**

Frequency Response<sup>1</sup>:

200Hz to 6.3kHz **Sound Masking:** Music/Paging: 200Hz to 10kHz

SPL1:

Minimum Masking SPL<sup>2</sup> (@ 1m): 30dBA Maximum Masking SPL<sup>2</sup> (@ 1m): 60dBA Maximum Music/Paging SPL3 (@ 1m): 62dBA

**Nominal Impedance:**  $3.6 \text{ k}\Omega$ 

**Nominal Dispersion:** 170° conical / half space **Channel Selection:** 

4 Auto-Sequencing and Repeating Channels

**Selectable Attenuation:** 0 dB, -3 dB, -6 dB, -9 dB

I/O Connectors: 2 RJ-45 connectors

Cabling: Category UTP Cabling (8 conductor)

**Maximum Power Consumption:** .02 W

**Driver Diameter:** 1.25" (32mm) **Enclosure:** Sealed

Color: White

**Product Dimensions** 

**Overall Diameter:** 3.25 inches (83mm) Depth: 2.5 inches (64mm) Weight: 5.6 oz. (159g)

**Included Accessories:** Acoustic Ceiling Tile Mounting Ring


UTP Cable (16ft/30ft)

Compliance:

UL and C-UL listed (USA and Canada) CE Marked (Europe) RoHS Directive (Europe) Evaluated to the requirements of UL 1480a and UL 2043 and is


suitable for use in air handling spaces

# FREQUENCY RESPONSE (dB SPL)




Frequency (Hz)

# **BEAMWIDTH** (Degrees)



Frequency (Hz)

# **DIMENSIONS**

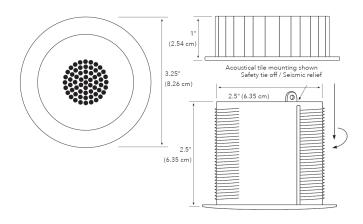

# **OPTIONAL ACCESSORIES**

Description	SKU
Universal Bracket	UB-(B = Black / W = White)
Drywall Mount	DM
Beam Bracket	BB-(B = Black / W = White)
Drywall Conduit Mount	СМ
Plenum Back Can	РВ
Emitter Cap (Black)	EC-B
Emiiter Cap (White)	EC-W
Room Control	QT-RC2

Biamp, Cambridge, Qt, and QtPro are either trademarks or registered trademarks of Biamp Systems, LLC in the United States and other countries. Other product names referenced may be trademarks or registered marks of their respective owners and Biamp Systems is not affiliated with or sponsored by these companies.

Specifications based on emitter array using published layout practices in conjunction with Qt Control Processor.

<sup>&</sup>lt;sup>2</sup> Bridge Mode Cable will increase Masking Min and Max SPL by + 3 dB from levels indicated.

<sup>&</sup>lt;sup>3</sup> Bridge Mode Cable will increase Music / Paging Max SPL by + 6 dB from levels indicated.