

Technical Support and E-Warranty Certificate www.vevor.com/support

CABLE RAILING POST

MODEL:HR-001/HR-002/HR-003/HR-004/HR-005/HR-006/HR-007/ HR-008/HR-009/HR-010/HR-011/HR-012/HR-013/HR-014 HR-015/HR-016/HR-017/HR-018/HR-019/HR-020/HR-021/ HR-022/HR-023

We continue to be committed to provide you tools with competitive price.

"Save Half", "Half Price" or any other similar expressions used by us only represents an estimate of savings you might benefit from buying certain tools with us compared to the major top brands and does not necessarily mean to cover all categories of tools offered by us. You are kindly reminded to verify carefully when you are placing an order with us if you are actually saving half in comparison with the top major brands.



CABLE RAILING POST

MODEL:HR-001/HR-002/HR-003/HR-004/HR-005/HR-006/HR-007/ HR-008/HR-009/HR-010/HR-011/HR-012/HR-013/HR-014 HR-015/HR-016/HR-017/HR-018/HR-019/HR-020/HR-021/ HR-022/HR-023



<Picture Only For Reference >

NEED HELP? CONTACT US!

Have product questions? Need technical support? Please feel free to contact us:

Technical Support and E-Warranty Certificate www.vevor.com/support

This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves a clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.

IMPORTANT SAFEGUARDS



WARNING: Read and understand this entire manual before operating or servicing this product. Failure to follow these warnings and instructions can cause personal injury or damage to valuable property.

- 1. The warning indicates that appropriate action should be taken to avoid the potential danger of personal injury.
- 2. Product capabilities apply to properly and completely assembled product only.
- 3.Please keep small spare parts out of children's reach, it is not a toy, Do not allow children to play.
- 4. For additional information regarding the parts listed in the following pages, please refer to the Assembly Diagram of this manual. Unwrap and separate all parts in a clean work area.

SAVE THESE INSTRUCTIONS

MAIN FEATRUES

This product is mainly used for column installation of wire functions and decorative accessories.

VEVOR's Cable Railing Post is made of all stainless steel materials, which has great resistance to rust and corrosion. It will work for long life time for interior and exterior railings with low maintenance. Please note that it is not recommended for coastal projects.


We work with every effort to provide quality products and professional service, and make VEVOR a reliable brand.

INSTALLATION INSTRUCTION

Installation indication and Applicable post

Applicable to all engineering installation scenarios.

Note: This product only includes the column and its installation fasteners, excluding wire rope, Cable Railing Kit, handrail.

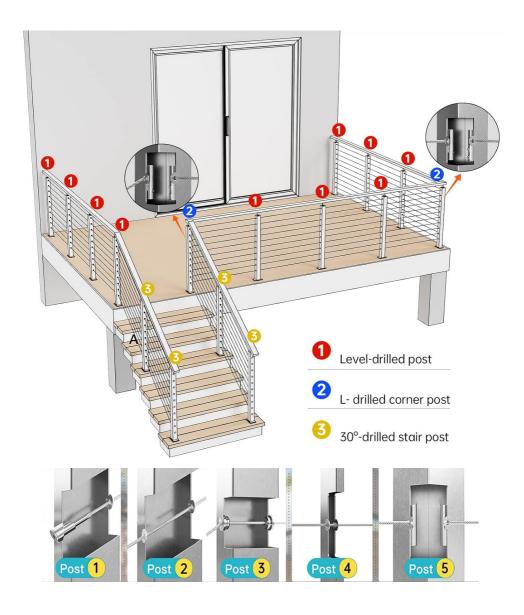


PRODUCT INFORMATION

Model	Drille d Heig ht (mm)	Drille d numb er	Hole diamet er (mm)	Pitch of holes (mm)	Section size (mm)	Color	Inclu de (pcs)
-------	-----------------------	---------------------------	------------------------------	------------------------------	-------------------------	-------	----------------------

HR-00 1	level	1067	12	φ10.5	80	50*50	Black	4
HR-00 2	level	914	10	φ10.5	80	50*50	Black	4
HR-00 3	level	1067	12	φ8	80	30*50	Black	4
HR-00 4	level	914	10	φ8	80	30*50	Black	4
HR-00 5	30°	1067	12	10.5×1 5	80	50*50	Silver	1
HR-00 6	30°	1067	12	10.5×1 5	80	50*50	Black	1
HR-00 7	L	1067	12	φ10.5	80	50*50	Black	1
HR-00 8	Non	914	/	/	1	50*50	Black	1
HR-00 9	level	914	10	φ10.5	80	50*50	Black	1
HR-01 0	30°	914	10	10.5×1 5	80	50*50	Black	1
HR-01 1	L	914	10	φ10.5	80	50*50	Black	1
HR-01 2	level	914	10	φ10.5	80	50*50	Silver	1
HR-01 3	30°	1067	12	8×13	80	30*50	Black	1
HR-01 4	L	1067	12	φ8	80	30*50	Black	1
HR-01 5	30°	914	10	8×13	80	30*50	Black	1
HR-01 6	L	914	10	φ8	80	30*50	Black	1

HR-01 7	Non	914	/	1	1	38*38	Black	1
HR-01 8	level	1067	12	φ8	80	30*50	Black	1
HR-01 9	Non	1067	/	/	1	50*50	Black	1
HR-02 0	level	914	10	φ8	80	30*50	Black	1
HR-02 1	level	1067	12	φ10.5	80	50*50	Black	1
HR-02 2	level	914	10	Ф8	80	30*50	Silver	1
HR-02 3	level	1067	12	φ10.5	80	50*50	Silver	1



PACKAGE INCLUDE

No	Compone nts	Picture	QTY							
			Fit model							
			HR-001/ HR-002	HR005~HR0 12/HR-019/H R-021/HR-02 3/	HR-003/ HR-004	HR-013~ HR-016/ HR-018/ HR-020/ HR-022/	HR-0 17			
1	post	(4	1	4	1	/			
		-	/	1	1	1	1			
2	Square cover		4	1	1	1	1			

3	Rectangul		1	1	4	1	/
	ar cover				7		
4	anchor	<i>(</i> 1)	16	4	16	4	4
-	bolt						
5	Curved		4	1	4	1	,
5	bracket						_ ′
6	Horizontal		4	1	4	1	/
	bracket						
7	hex	1	4	1	4	1	1
'	wrench			l	4		
8	Open end	₩	4	1	4	1	1
•	wrench		4	l	4	1	
9	Tapping	0	8	0	0	0	
9	screw		o o	2	8	2	4
40	Plastic		1	/	1	1	1
10	cover						1

INSTALLATION

For concrete or wood floor



Step1.Mark the drilling points at the appropriate installation locations.




drill to make a hole for ∅ 12 at the marked points.

Step2.use a hammer



Step3.Hammer the anchor screw into the drilled hole.








Step5.Close the lid and finish fixing the post.

Note: Ensure that the column is upright when fixing the bottom plate of the post.

Mount with handrail(horizontal)

Step1: Fixed bracket





Step2: Determine the installation position of the handrail, and then mark the position under the handrail and bracket holes and drill holes with a \varnothing 5.5- \varnothing 5.6mm drill.




Step3: Use the self-tapping screws in the accessory to fix the handrail to the support.



It is also suitable for the installation of arc handrails and brackets.

Mount with handrail(gradient)

Step1: Fixed bracket




Step2: Adjust the Angle of the bracket to fit the underside of the handrail. Determine the installation position of the handrail, and then mark the position under the handrail and bracket holes and drill holes with a \varnothing 5.5- \varnothing 5.6mm drill.

Note: The handrail and bracket can be pre-fixed with the help of clamping tools, so that multiple bracket installation points can be marked and positioned at the same time.



Step3:Remove the bracket from the post and then use the self-tapping screws in the accessory to fix the bracket to the handrail.


Fix the post and bracket again.

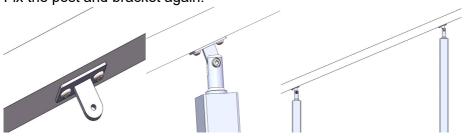




Install with wire rope and fittings


For Level Wheel Protector Sleeve



For Stud Tensioner Horizontal mounting and Angle

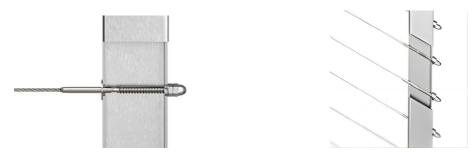

For Turnbuckle Tensioner and Fixed Terminal

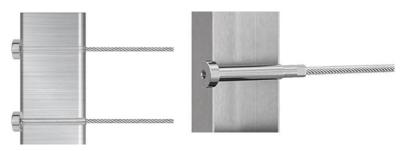

Address: Baoshanqu Shuangchenglu 803long 11hao 1602A-1609shi

Shanghai

Imported to AUS: SIHAO PTY LTD, 1 ROKEVA STREETEASTWOOD

NSW 2122 Australia

Imported to USA: Sanven Technology Ltd. Suite 250, 9166 Anaheim

Place, Rancho Cucamonga, CA 91730

UK REP

Pooledas Group Ltd Unit 5 Albert Edward House, The Pavilions Preston, United Kingdom

EC REP

SHUNSHUN GmbH Römeräcker 9 Z2021, 76351 Linkenheim-Hochstetten, Germany

Made In China



TOUGH TOOLS, HALF PRICE

Technical Support and E-Warranty Certificate www.vevor.com/support