



BluePhonic

Libre User Manual

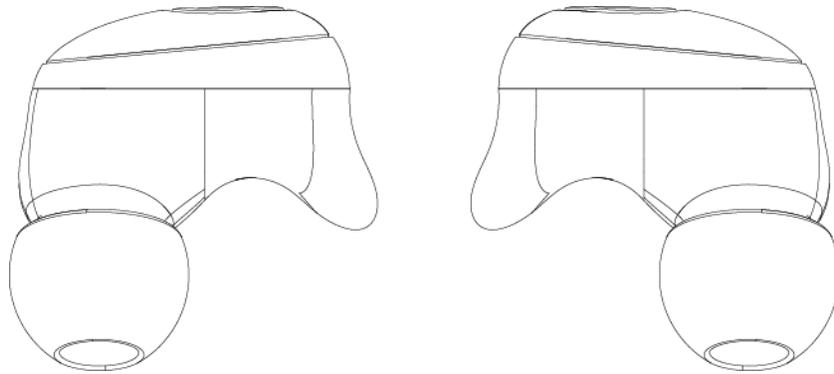


Please read the instructions
carefully before using
the product

Earbuds Structural Component Description

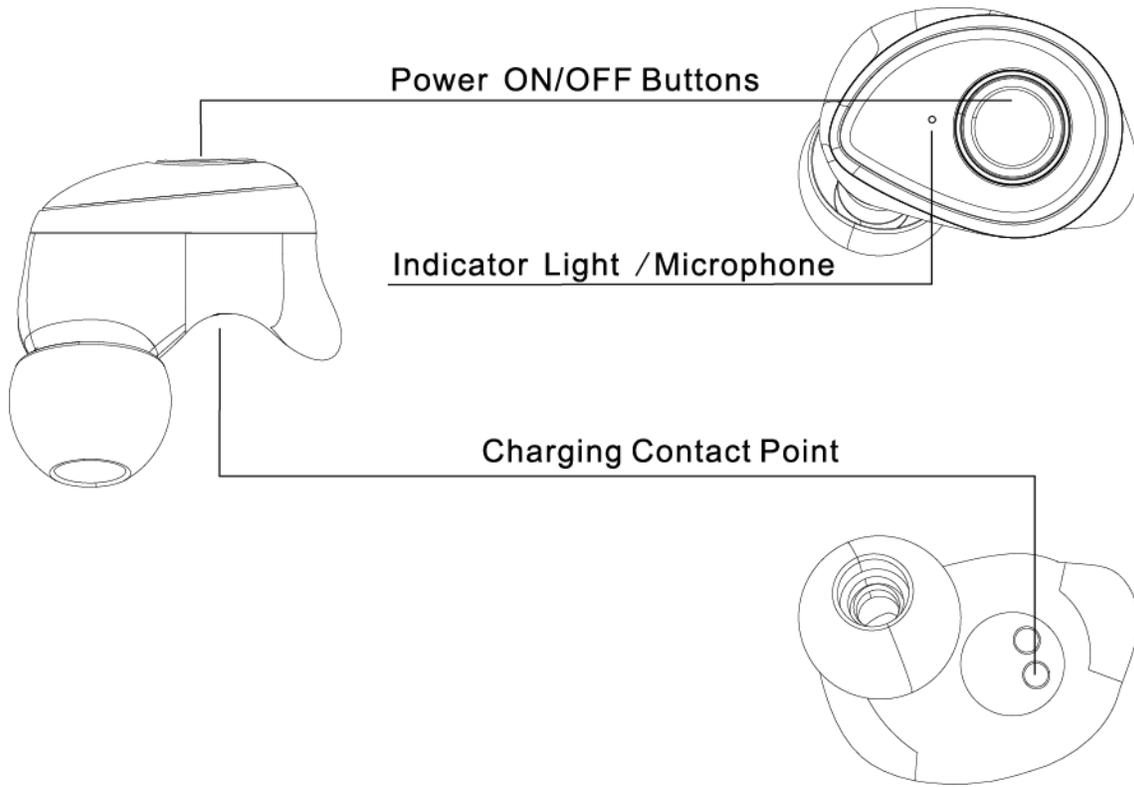

Charging case Structural Component Description

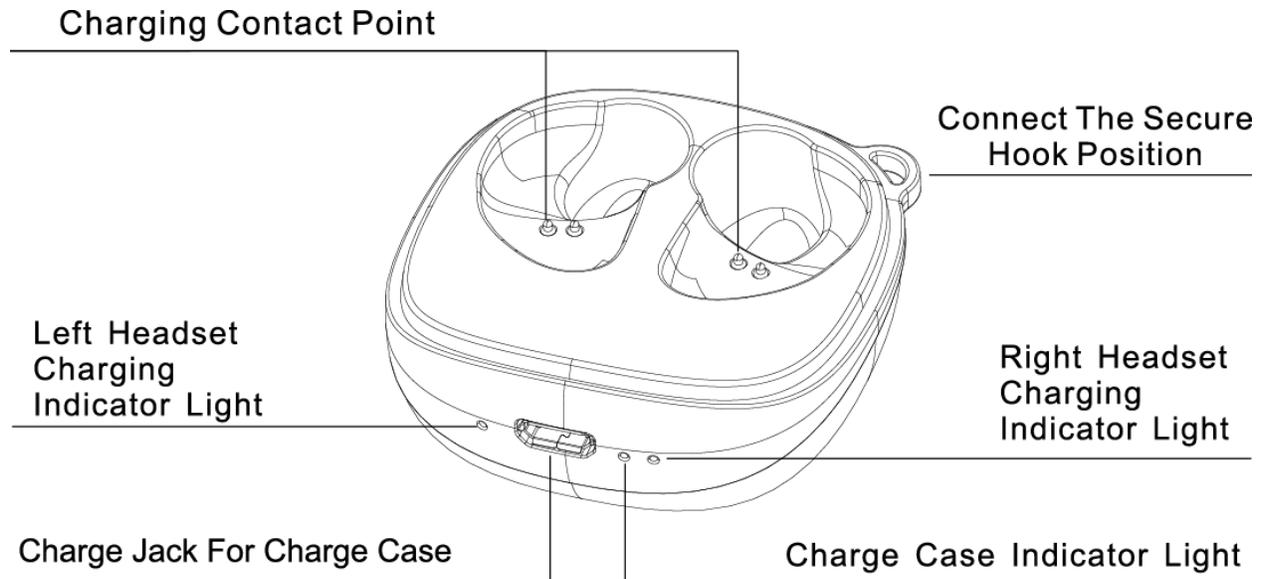

HOW TO CHARGE

Once you receive the Bluephonic Libre true wireless earbuds, charge the charging case with the USB charger that comes with the package.

Make sure that both earbuds are located in the slots properly inside the case.

1. Place the Libre into the charging slots of the charging case individually, the earbuds will be charged automatically
2. Once the charger case is closed it will start charging the earbuds automatically
3. Make sure The LED light of the charging case is Red while charging
4. When earbuds are fully charged, the red LED lights will turn to blue.

Attention: When the earbuds has been put into the charging case, if the charging case right and left LED shines it shows the earbuds is charging. To prevent over discharge, do not keep the earbuds in the charger case for more than 6 months at a time.

LOW POWER WARNING

Red LED flashes when battery charge is low, accompanied by a “Battery low, please recharge” prompt tone.

HOW TO PAIR EARBUDS WITH YOUR DEVICE

IMPORTANT - Right earbud **cannot work** without pairing the left earbud first.

You can use the left earbud as single earbud, but you cannot use the right earbuds as a single.

After you have charged the earbuds, take out the earbuds out of the charging case

STEP ONE

1. Put the earbuds in your ears, press on **both** earbuds main button.

Press "Long press" for about 4 seconds to turn them on.

You will hear the "**POWER ON**" prompt tone in both earbuds.

2. Both earbuds will automatically enter the pairing mode - You will hear "**PAIRING**"

3. Both earbuds will automatically complete the connection.

The right channel earphone prompts "**RIGHT CHANNEL**", and the left channel earphone prompts "**LEFT CHANNEL**", Then you will hear "**CONNECTED**"

4. Once the connection is successful, the left channel earphone is kept in a pairing state

The right channel earphone is in the connected standby state.

DO NOT try to pair the earbuds to your Bluetooth device before the earbuds are paired to each other.

STEP TWO

Now you can activate the mobile phone Bluetooth search function, find the earbuds “Libre” and select it to pair. You will hear the “**SECOND DEVICE CONNECTED**” prompt tone.

FEATURES

TURN ON/OFF

Long press on right and left earbuds main button for 2 seconds to turn on;

Long press on right and left earbuds main button for 4 seconds to turn off (When you are finished with the earbuds, turn off either one of the earpieces and the other one will turn off at the same time).

ANSWER PHONE CALL

When you receive a phone call, accompanied by the “call reminder” voice prompt, click the main button on the left/right channel earbuds.

HANG UP PHONE CALL

While in the call, press the main button once, and get the the “end of call” prompt tone.

REFUSE PHONE CALL

As your phone rings, long press the main button until you hear the “Du” prompt tone. Release the button and the phone call will be refused.

AUDIO TRANSFER

During a call, long press the main button of the left/right channel earbuds until you hear the “Du” prompt tone, then release the button. Repeating this process enables you to switch between mobile phone and earbuds audio.

CALL AND SILENT MODE BUTTON

During a call, double-click left/right channel earbuds main button and you will hear the “open silent mode” prompt. If you repeat this process you will hear the “closed silent mode” prompt tone.

NEXT SONG

When playing music, double-click the main button to skip to the next song.

PLAY/PAUSE

When playing music, click the main button once to control the pause/play function.

SCAVENGING PAIRING RECORDS

In the pairing state, double-click the main button once and you should see a single flash from the red LED light.

AUTO RECONNECTION

After boot up, the earbuds will auto-pair with the last paired device. If you are using a single earpiece, short press the main

button for a prompt tone. After 5 seconds, the earbuds will reconnect automatically.

THREE-WAY CALLING

In a phone call, if you receive another call you can short click the main button once to retain the current (A) call and connect the new (B) phone call. Double click main button to switch between A/B phone calls.

SIRI OPEN/CLOSE SOUND CONTROL

Long press on left and right channel main button until you hear the “Du” prompt tone (approx. one second) then release. The sound control can be cancelled by repeating the operation.

IOS BATTERY DISPLAY

After connecting to a device with the iOS system, the earbuds battery charge status will be displayed on the iOS device.

Indicator light

LEFT&RIGHT PAIRING MODE

(Red and blue LED) fast flashing at the same time, lasts about 60 seconds.

POWER OFF

Red led light flashes slowly and then goes out.

IN A PHONE CALL

When phone call is received, blue LED flashes slowly. When you answer the phone call, blue LED light goes out.

FINISHED CHARGED

Red LED goes out.

CHARGING

Red LED stays on continuously.

Specifications

Product No: Bluephonic Libre

Bluetooth Version: Bluetooth V5.0+EDR

Charging Case: 51x50x31mm

Charging case battery capacity: 3.7V/700mAh Li-polymer

Earbuds battery capacity: 3.7V/50mAh Li-polymer

Support agreement: A2DP, AVRCP, HSP, HFP

Operating frequency: 2.4G ISM(2.402-2.480ghz)

Ohms: $32 \pm 15\% \Omega$

Sensitivity: $100 \pm 3\text{DB}$

Frequency range: 20-20KHZ

Output power: 3-5mw

Fully charging time for charging case: 5V/1A
about 3 hrs

Earbuds fully charging time: About 1.5 hours

For comments & questions: www.bluephonic.com