



F97 SERIES







MECHANICAL KEYBOARDS

We recommend that you read this manual thoroughly before using the product.

Start Reading →

LED Indicator Status Description

The indicator is located between **G** and **H**

| | | | | | |
|--|--|---|--|--|---|
|  Red Light Blinking |  Blue Light Blinking/Flashing |  Turquoise Light Blinking/Flashing |  Yellow Light Blinking/Flashing |  Pink Light Blinking/Flashing |  White Light On/Blinking |
| Low Battery Level | Bluetooth Device #1 Re-Connecting / Pairing On | Bluetooth Device #2 Re-Connecting / Pairing On | Bluetooth Device #3 Re-Connecting / Pairing On | 2.4GHz Device Re-Connecting / Pairing On | CapsLock On&Off / Special Keys Combination Enabled |

Hold **FN** first, then corresponding keys to enable special keys combination.



Short Press: Hold FN first, then the corresponding key, and release both keys.



Long Press: Hold FN first, then the corresponding key. Hold for 5 seconds until the indicator starts blinking.

🔗 Three Ways of Connecting Devices

Bluetooth Mode

① Toggle the keyboard Mode Switch to the wireless side.   (🔊)

② Short Press  +  to make the indicator blink in blue,


then Long Press  +  to make the indicator flash in blue.

③ Select the pairing device [IQUNIX F97 BT 1]. The indicator turns off when the keyboard is paired successfully.




In order to complete the pairing of the keyboard with a second or third new Bluetooth device, repeat the instructions from Step ② and replace the "FN+1" with "FN+2" or "FN+3". The devices will be shown as [IQUNIX F97 BT 2] and [IQUNIX F97 BT 3].

2.4GHz Mode


① Toggle the keyboard Mode Switch to the wireless side. 

② Plug the 2.4GHz receiver into your computer.




③ Press **FN** + **\$ 4** to enter 2.4GHz pairing mode. The indicator turns off when the keyboard is paired successfully.

Wired Mode

① For Wireless Version, toggle the keyboard Mode Switch to the wired side. 

② Plug the USB cable into your device.

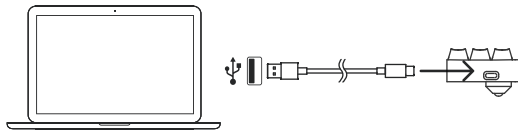

*When being plugged to the computer, the keyboard will start to charge automatically.


*Caution: The rated power for the charger must not exceed 5V=1A.

*Connection to a higher power output will damage the keyboard.

Special Keys Combinations



Long Press FN+TAB: Switch Between Mac/Windows Layout

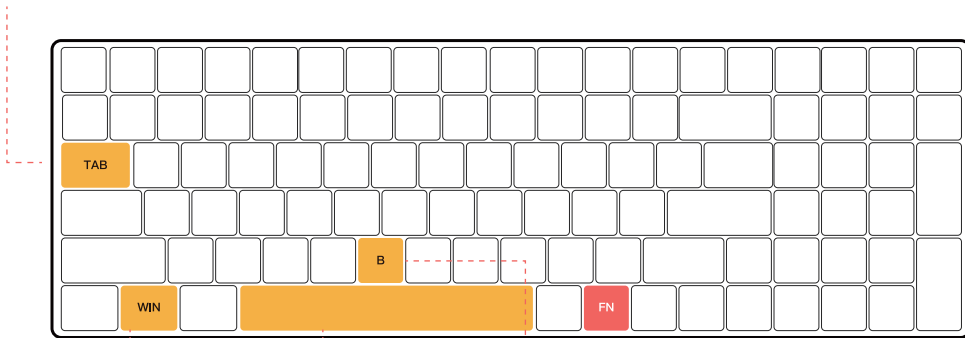


Long Press FN+Win:
WinLock

Long Press FN+Space:
Reset to Default


Short Press FN+B: Battery Level Check
The LED Indicator blinks 1, 2, 3,...10 times,
which stands for 10%, 20%, 30%,...100% battery level.

Backlight Keys Combinations (Short Press)

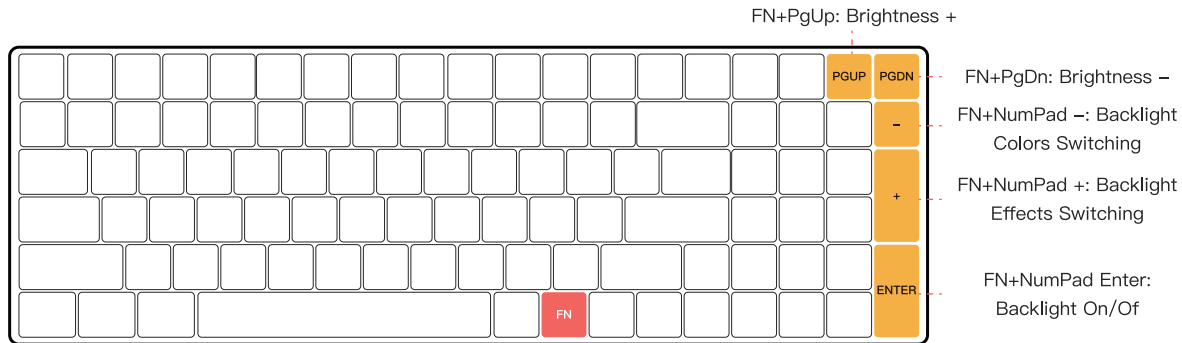

*Available for Backlit version only.

Keyboard Layout

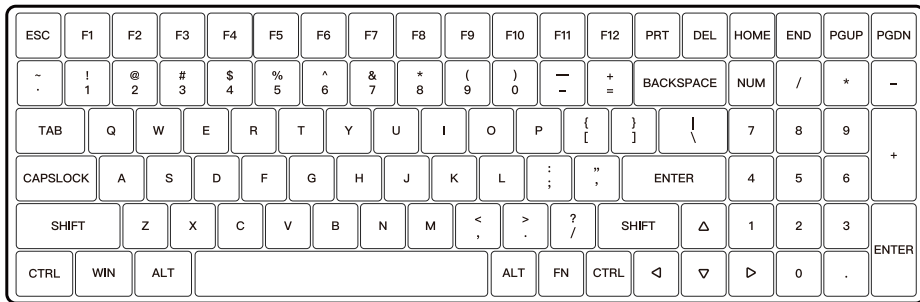

Follow us: IQUNIX



To learn more details, please reach out to us on official website or social media.

Official website: www.IQUNIX.store