




Black Electric Multi Motor Corner Desk Frame

Instruction Manual

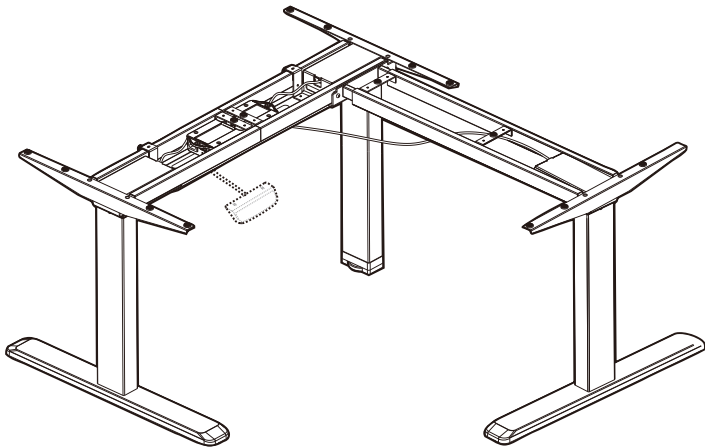

SKU: DESK-V133E



Scan the QR code with your mobile device or follow the link for helpful videos and specifications related to this product.

<https://vivo-us.com/products/desk-v133e>

GET IN TOUCH | Monday-Friday from 7:00am-7:00pm CST



help@vivo-us.com



www.vivo-us.com
Chat live with an agent!



309-278-5303



WARNING!

If you do not understand these directions, or if you have any doubts about the safety of the installation, please call a qualified technician. Check carefully to make sure there are no missing or defective parts. Improper installation may cause damage or serious injury. Do not use this product for any purpose that is not explicitly specified in this manual and do not exceed weight capacity. We cannot be liable for damage or injury caused by improper mounting, incorrect assembly, or inappropriate use.

ELECTRICAL SAFETY INSTRUCTIONS























THIS PRODUCT IS POWERED BY ELECTRICITY. IN ORDER TO AVOID BURNS, FIRE AND ELECTRIC SHOCK, PLEASE READ THE FOLLOWING INSTRUCTIONS CAREFULLY.

- DO NOT CLEAN PRODUCT WHILE POWER IS CONNECTED.
- DO NOT DISASSEMBLE OR REPLACE COMPONENTS WHILE POWER IS CONNECTED.
- NEVER OPERATE THE SYSTEM WITH A DAMAGED CORD OR PLUG. PLEASE CONTACT YOUR SELLER TO REPLACE DAMAGED PARTS.
- NEVER OPERATE SYSTEM IN DAMP ENVIRONMENTS OR IF ANY ELECTRICAL COMPONENTS HAVE MADE CONTACT WITH LIQUIDS.
- ALTERATIONS OF THE GIVEN POWER UNIT ARE NOT ALLOWED.
- OUTDOOR USE IS PROHIBITED.

WARNING: CHOKING HAZARD

SMALL PARTS - NOT FOR CHILDREN UNDER 3 YEARS. ADULT SUPERVISION IS REQUIRED.

PACKAGE CONTENTS

			
A (x1) Telescopic Crossbar	B (x1) Extension Crossbar	C (x3) Side Bracket	D (x2) Lifting Column
			
E (x1) Corner Lifting Column	F (x2) Foot	G (x1) Fixing Plate	H (x1) Control Unit
			
I (x1) Power Cord	J (x1) Motor Extension Cable	K (x1) Cable Tray	L (x2) Hook
			
M (x1) Control Panel			
			
S-A (x12) M6x10 Screw	S-B (x10) M6x16 Screw	S-C (x16) 7/8" Screw	S-D (x2) 3/4" Screw
			
S-F (x4) M4x5 Screw	S-G (x3) Cable Clip	S-H (x16) Anti-Vibration Pad	S-I (x1) Allen Wrench
			
			S-J (x3) Soft Pad


WARNING

PINCH POINT

DO NOT place hands on or near support bars. Moving parts can crush and cut. Pinch points are created during lifting and lowering the work surface. Failure to follow these instructions may result in serious personal injury.



TOOLS NEEDED




DO NOT EXCEED WEIGHT CAPACITY.
Failure to do so may result in serious injury.

330lbs
(149.69kg)

ASSEMBLY STEPS



STEP 1

Place Telescopic Crossbar **(A)** and Extension Crossbar **(B)** over Side Brackets **(C)** as shown, making sure the screw posts on Side Brackets **(C)** fit into the holes in the crossbars.





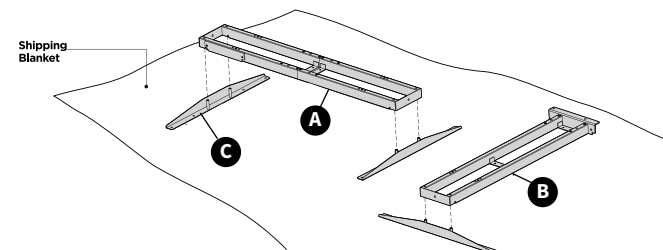


The Telescopic Crossbar **(A)** has a mounting plate located on the side, place the Corner Lifting Column **(E)** onto this side of the Telescopic Crossbar **(A)**. With the Extension Crossbar **(B)** placed on the same side as the mounting plate on the Telescopic Crossbar **(A)**, Align the holes on the end of Extension Crossbar **(B)** with the holes on Corner Lifting Column **(E)** and Telescopic Crossbar **(A)**.

Loosely install all the following screws before fully tightening. Install M6x16 Screws **(S-B)** through the Extension Crossbar **(B)** and column holes. Install M6x10 Screws **(S-A)** through the remaining column holes as well as through the Extension Crossbar bracket and into the Telescopic Crossbar **(A)** mounting plates. Tighten using the Allen Wrench **(S-I)**.

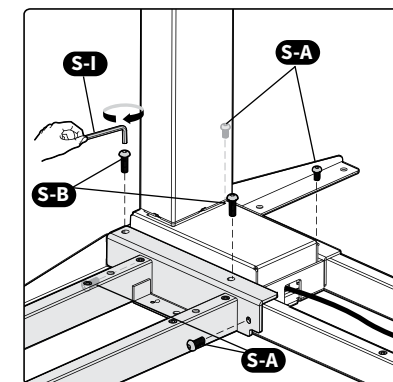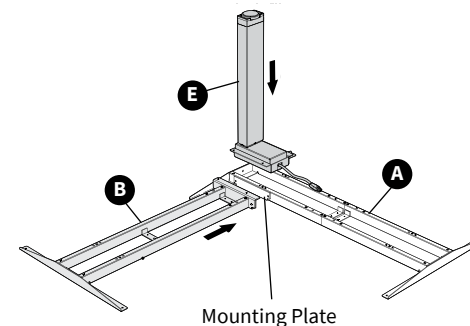


STEP 2

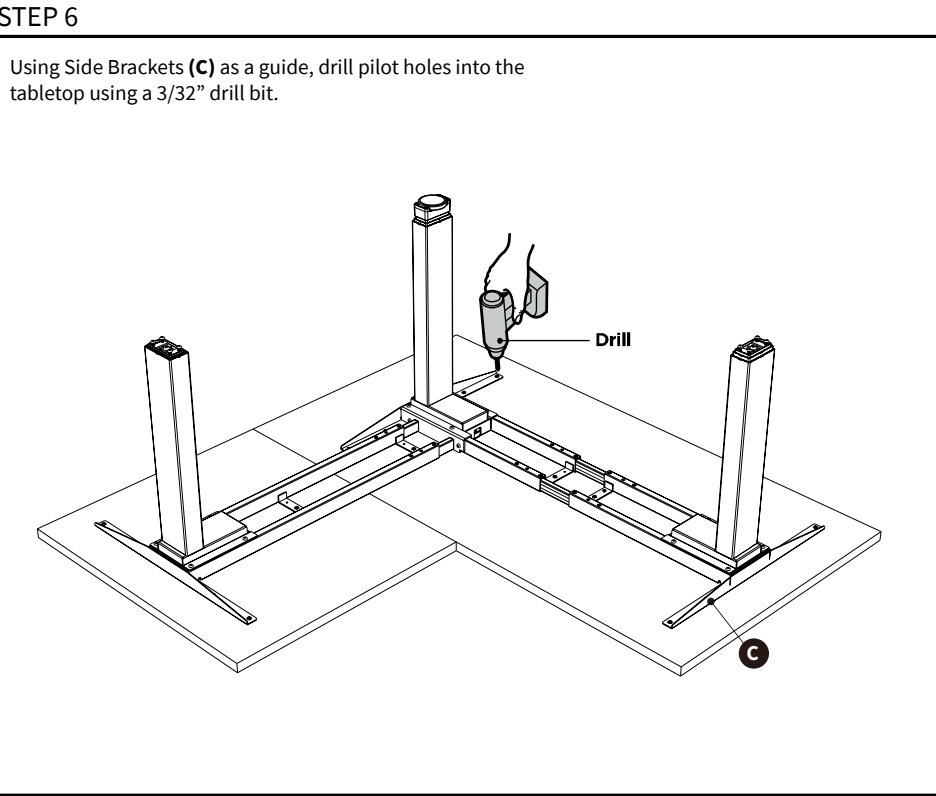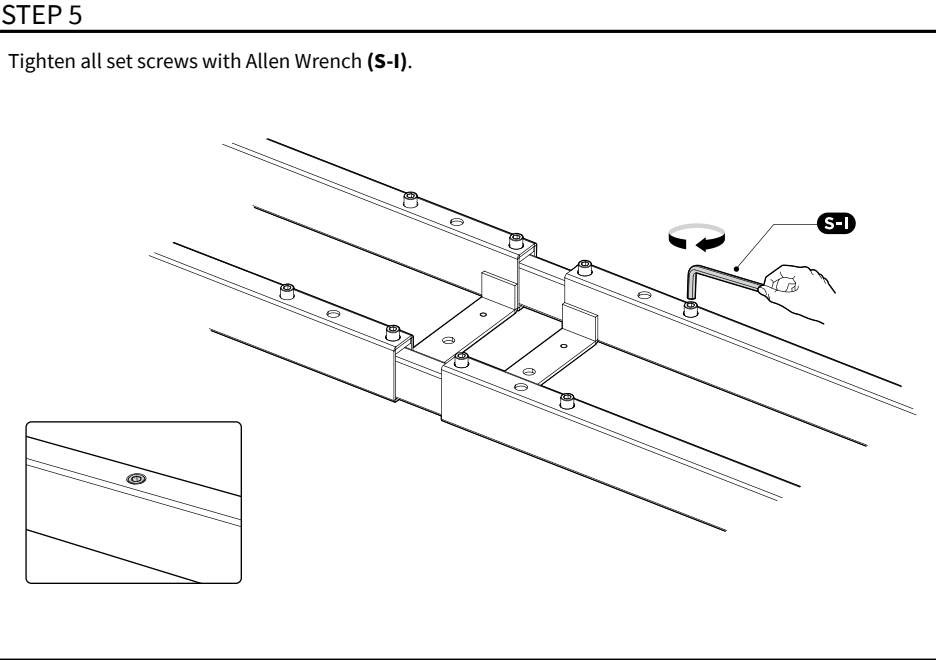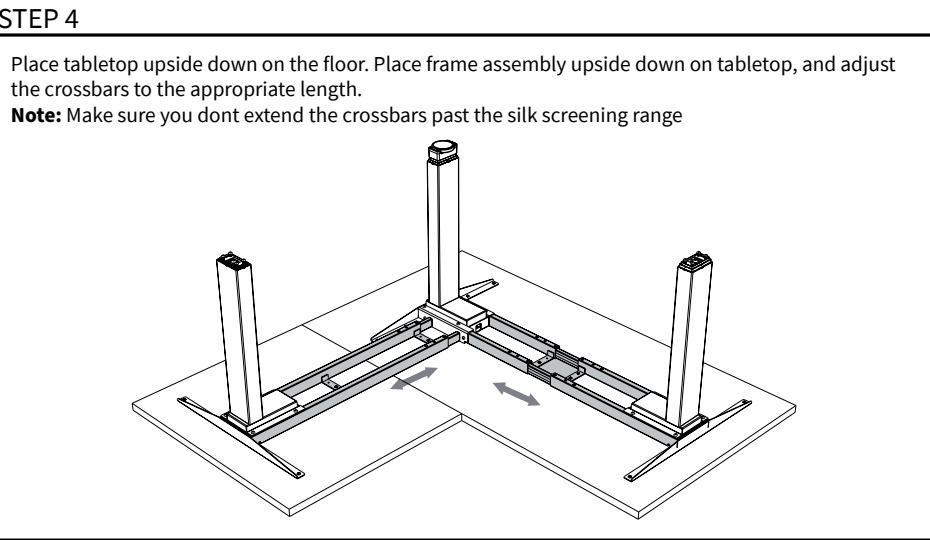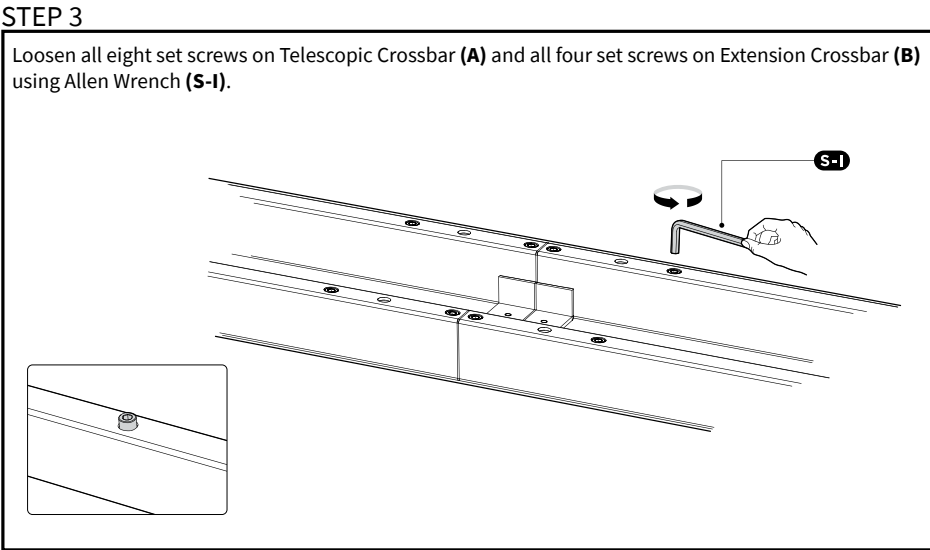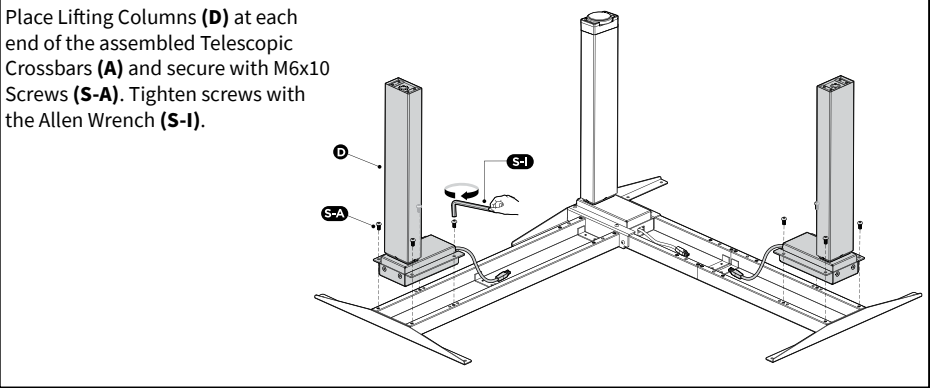


STEP 7

Place Feet (F) on Lifting Columns (D) as shown. Insert M6x16 Screws (S-B) into the four mounting holes on each foot and tighten with Allen Wrench (S-I).

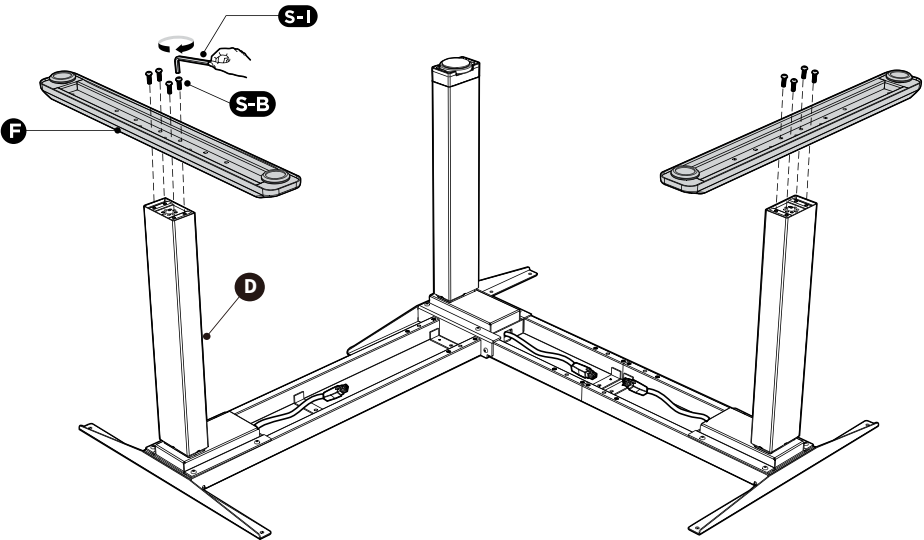


STEP 8

Attach the Fixing Plate (G) to the frame using M4x6 Flat Head Screws (S-E). Tighten screws with a philips screwdriver.

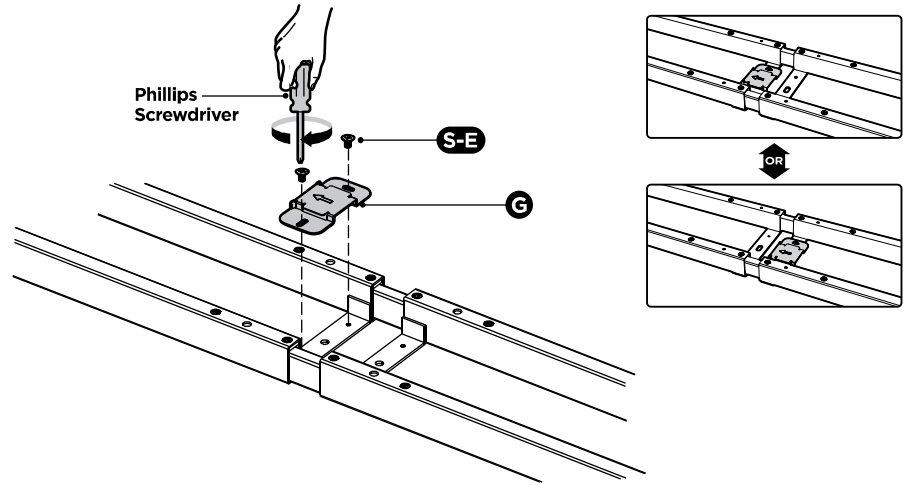




STEP 9

Connect Control Panel (M), Lifting Columns (D) and Power Cord (I) to the Control Unit (H). If needed, use Motor Extension Cable (J) to connect the farthest lifting column.

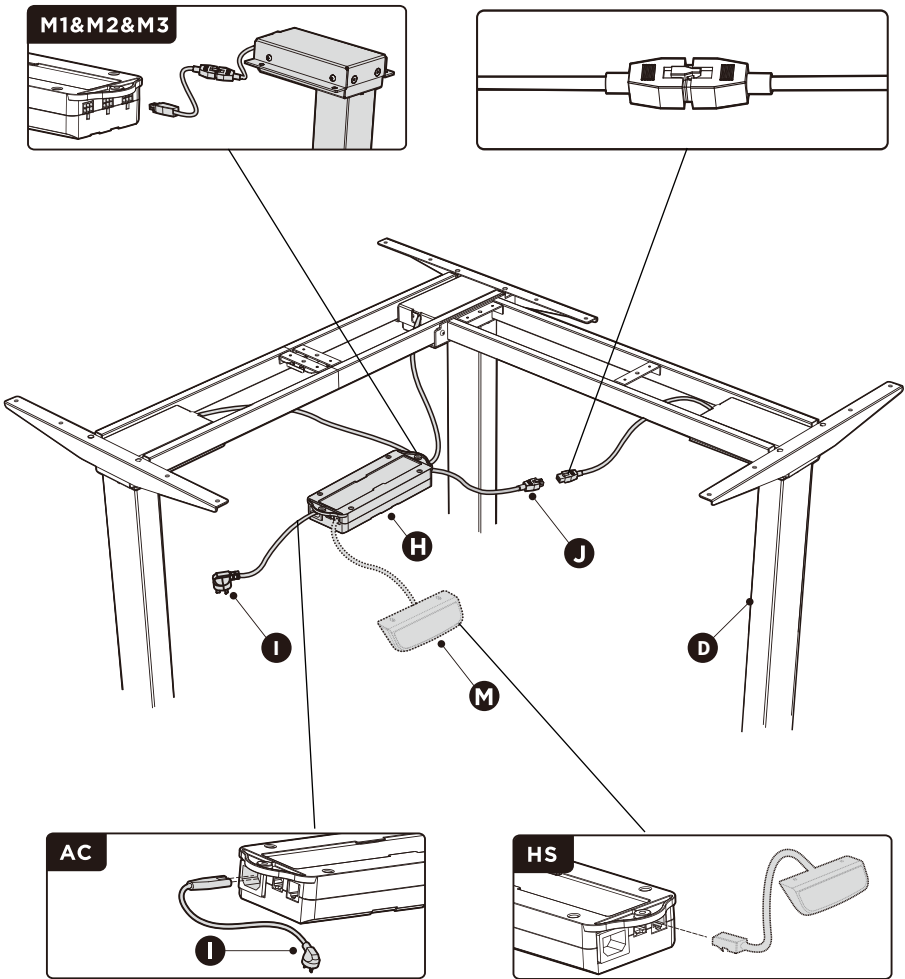


STEP 10

Slide Control Unit (**H**) onto Fixing Plate (**G**).

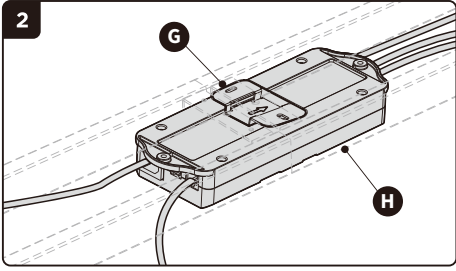
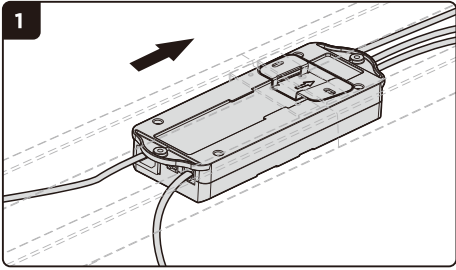
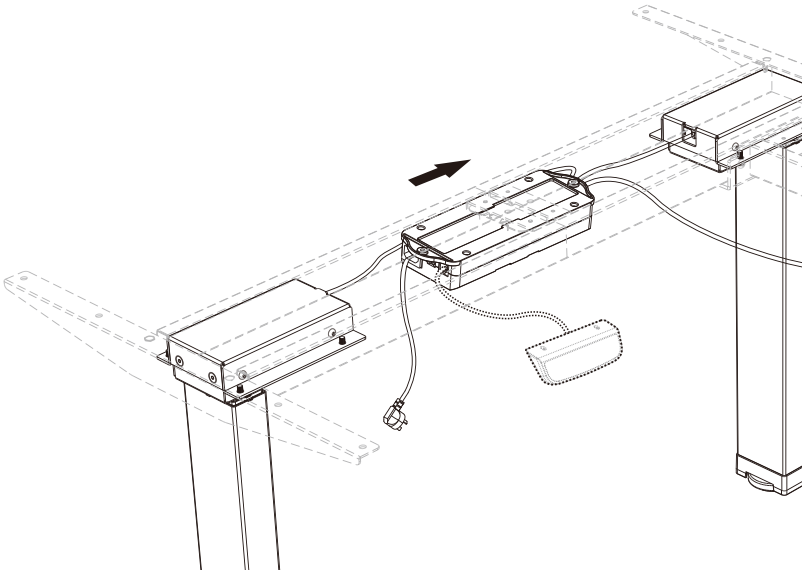


STEP 11

OPTIONAL: Remove paper backing from soft pads (**S-J**) and stick them to the inside and top of hooks (**L**).





Fix Hooks (**L**) to Cable Tray (**K**) with M4x5 Screws (**S-F**). Tighten all screws. Hang the cable management tray assembly onto the frame as shown.

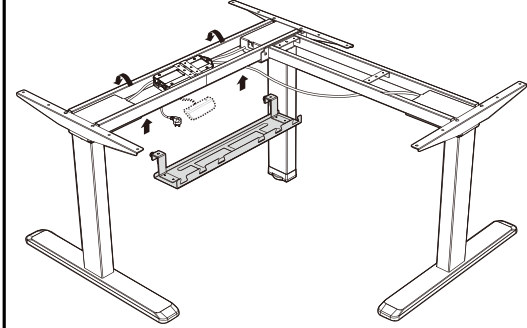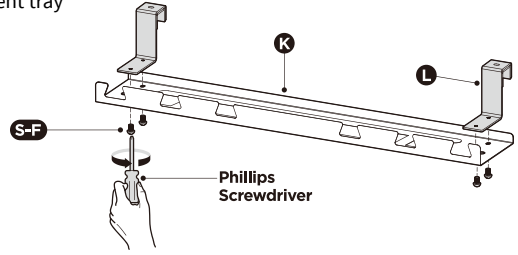


STEP 12

Tighten thumbscrews on Hooks (**L**) to secure the shelf.

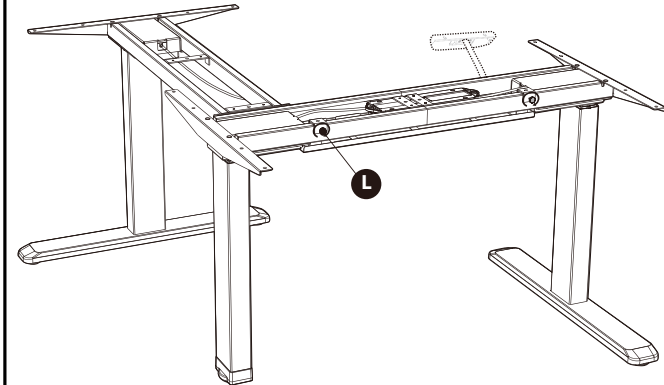


STEP 13

Insert Anti-Vibration Pads (**S-H**) into frame assembly.

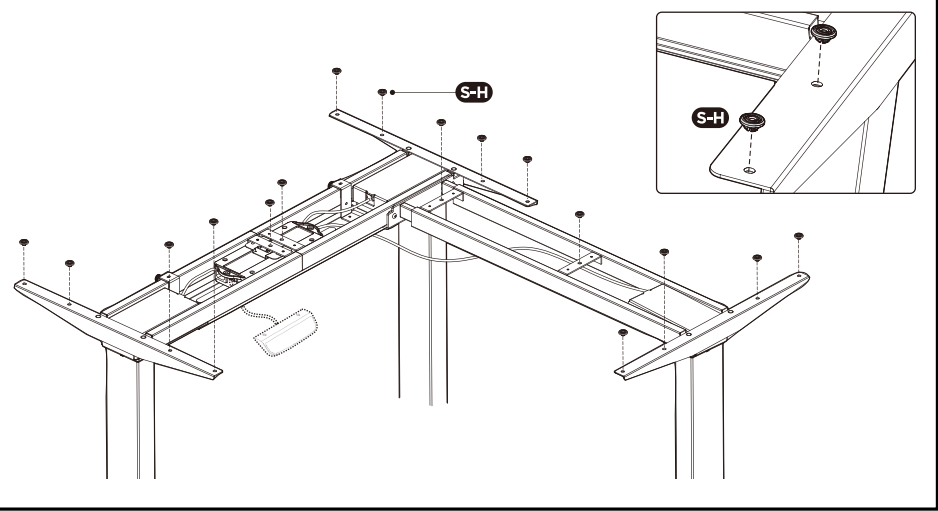


STEP 14

Attach the desktop with 7/8" Screws (**S-C**) using a phillips screwdriver. Place Control Panel (**M**) at the desired location and mark drilling locations with a pencil. Drill 5/8" (16mm) deep pilot holes under the desktop with a 5/64" (or 2mm) drill bit. Attach Control Panel (**M**) to the desktop using the 3/4" Screws (**S-D**). Add Cable Clips (**S-G**) to organize cables if needed.

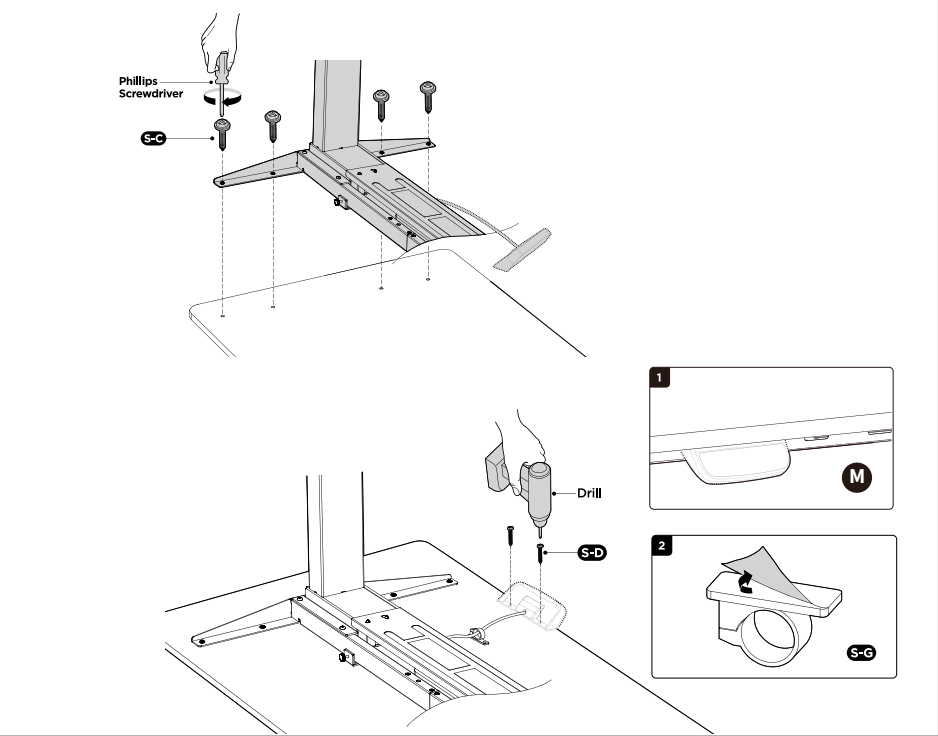

STEP 15

Connect Power Cord (**I**) to a wall outlet to power on desk for operation. Each foot pad can be adjusted independently for fine tuning. Slightly turn the foot pad to lower or raise the base. Use a level to ensure the desktop is even.

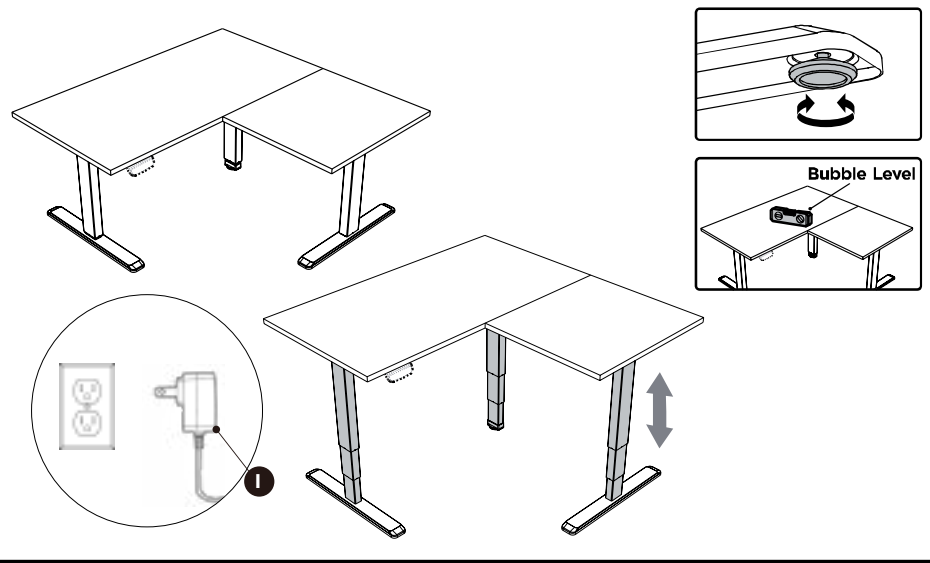

CAUTION!



Do not exceed desk weight limit.



Keep area of vertical motion free of obstacles.



Keep weight on desk balanced for correct operation and longer life of components.



Leave enough slack in cables to allow for full range of vertical motion.

Failure to follow these instructions may result in property damage and/or personal injury.



Love your new VIVO setup and want to share?
Tag us in your photo! **@vivo_us**

LAST UPDATED: **09/28/2021**
REV4.1



Open **Monday - Friday 7:00am - 7:00pm CST**,
our dedicated support team can offer immediate assistance with rapid response times. If any
parts are received damaged or defective, please contact us. We are happy to replace parts to
ensure you have a fully functioning product.



309-278-5303

AVG. RESOLUTION TIME (*within office hrs*): **5M 4S**



www.vivo-us.com
Chat live with an agent!

AVG. RESOLUTION TIME (*within office hrs*): **< 15 M**



help@vivo-us.com

AVG. RESPONSE TIME (*within office hrs*): **1HR 8M**

- 23% within < 15m
- 38% within < 30m
- 61% within < 1hr
- 83% within < 2hr
- 92% within < 3hr

FOR MORE VIVO PRODUCTS, CHECK OUT OUR WEBSITE AT: www.vivo-us.com