


TINYTUNE CHROMATIC TUNER PEDAL

User's Manual

Dear Musician,

Thank you for choosing the TinyTune, and welcome to the KLIQ! To register your product warranty, please visit www.kliqmusicgear.com/warranty. To get the most out of your new tuner, please carefully read this manual prior to first use, and keep it for future reference.

PANEL & FUNCTIONS

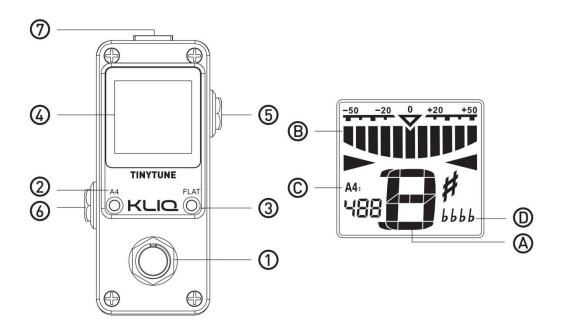

- ① On / Off Switch
- ② A4 Button
- ③ Flat Button
- 4 Screen
- ⑤ Input Jack
- **6** Output Jack
- ⑦ 9V ⊕ ⊕ DC Adapter Jack

Display Indicators:

- A Note Name
- B Tuning Meter
- © A4 Reference Pitch
- Flat Tuning

TinyTune User's Manual Page 1

USING THE TUNER

- 1. Connect a 9V DC Power Adapter into the pedal. Please make sure the adapter's polarity is center-negative.
- 2. Plug your instrument into the Input Jack, and your next pedal or amplifier to the Output Jack.
- 3. Hit the On / Off Switch to toggle the power. Please note, when the tuner is on, no sound will pass through to the output.
- 4. Play a single note on your instrument. The note will be displayed on the Note Name Indicator (a). The red Indicators on the left of the Tuning Meter (b) will light up if the pitch is flat. The yellow indicators on the right of the Tuning Meter (b) will light up if the pitch is sharp. Adjust the tuning so that the center blue indicator Lights up on the Tuning Meter (b), along with two blue triangles on both sides of the note name. This means the note you're playing is perfectly in tune.

A4 CALIBRATION AND FLAT TUNING

- Each time you press the A4 Button ②, the calibration value will increase in 1 Hz steps, with the current value shown by the A4 Reference Pitch Indicator ⑤. This setting range is between 430 and 450 Hz.
- Press the Flat Button ③ to select the desired setting from "b", "bb", "bbb", and "bbbb", which will be shown by the Flat Tuning Indicator ⑤.

SPECIFICATIONS

- Tuning Range: A0 (27.50Hz) C8 (4,186.01Hz)
- Tuning Precision: ±0.5 cent
- A4 Pitch Calibration: 430-450Hz (1Hz steps)
- Flat Tuning: "b", "bb", "bbb", and "bbbb"
- Power Source: 9V DC Adapter
- Dimensions: 3.66 x 1.50 x 1.22 inch / 93 x 38 x 31 mm
- Weight: 4.39oz / 123g

THIS PRODUCT COMPLIES WITH FCC PART 15 RULES. OPERATION OF THIS PRODUCT IS PERMITTED IN USA PROVIDED THIS PRODUCT DOES NOT CAUSE HARMFUL INTERFERENCE AND PROVIDED THIS PRODUCT ACCEPTS INTERFERENCE FROM OTHER DEVICES, EVEN IF THAT INTERFERENCE IS DETRIMENTAL TO PERFORMANCE OF THIS PRODUCT.

For assistance with this product, please get in touch with us by emailing support@kliqmusicgear.com, or by visiting www.kliqmusicgear.com/contact.

TinyTune User's Manual Page 2