


WIRELESS BONE CONDUCTION HEADPHONES

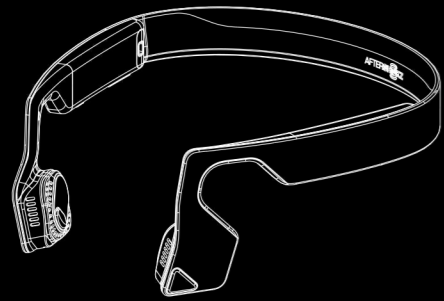

BLUEZ 2S

OPEN EAR EXPERIENCE

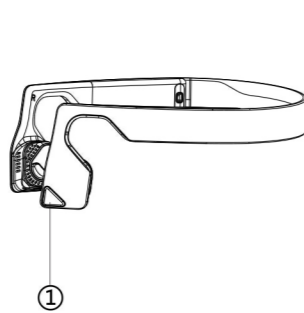


Fig.1

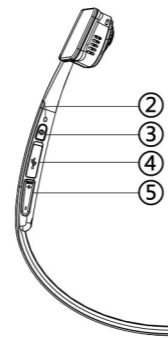


Fig.2



Fig.3

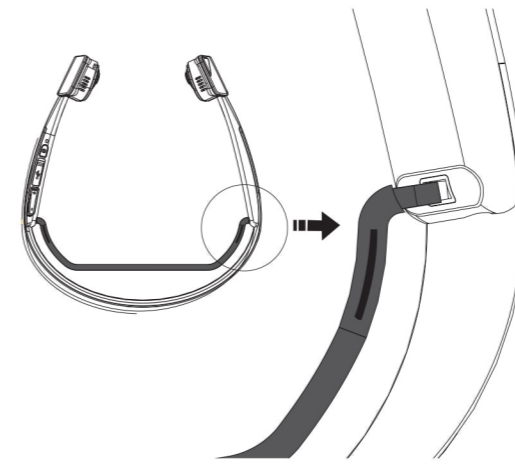


Fig.4

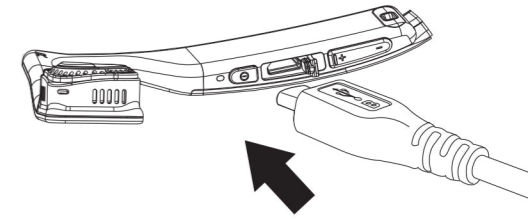


Fig.5

WIRELESS BONE CONDUCTION HEADPHONES

Part description (Fig.1 Fig.2)

- ① Multi-Function Button(MFB)
- ② LED Indicator
- ③ Power Button
- ④ Micro-USB Charging Port
- ⑤ Volume Control

Accessories

Adjustable Tension Band / Micro-USB Charging Cable / Reflective Stickers
Weatherproof Storage Pouch / Warranty Registration Card

What's special?

- ▶ OpenFit™ offers unmatched ambient sound awareness and extended comfort
- ▶ Stereo Bluetooth headphones with wireless phone and music functions
- ▶ Sweat resistant design blocks out moisture and precipitation

How to wear (Fig.3)

Begin by holding the headphones horizontally, with the transducer side facing up, closest to your body. Lift the headphones over your head, so the back of the wraparound headband sets in place at the base of it and the transducers rest on your cheekbones in front of your ears (not nested inside or covering your ears).

- ⑥ RESTS ON CHEEKBONES
- ⑦ CURLS OVER EARS
- ⑧ WRAPS BEHIND HEAD

Note(Fig.4)

The Adjustable Tension Band is recommended for those who prefer a more secure fit around the back of their heads. The Adjustable Tension Band is afflexible silicon band with two tough pins at each end, which is packed together with Micro-USB Charging Cable in a plastic zippered bag.

How to operate

Turn on/off:

Hold Power Button for 2 seconds to turn on/off, which is followed by "Welcome to Bluez 2S" / descending beeps, respectively.

Pairing:

1. While off, press and hold the Power Button for 5 seconds, at which point the LED Indicator will begin flashing in alternating red/blue and Audrey's voice will prompt by the word: "pairing".
2. Locate the Bluetooth menu on the device and select "Bluez 2S by AfterShokz". Enter "0000" if password is required.
3. Bluez 2S will be connected within seconds and Audrey's voice will prompt by the word "connected".

Note

If Power Button is pressed and held for 2 seconds and then release, Bluez 2S will turn on and automatically reconnect the previously paired device in 10 seconds.

If out of range (more than 33 feet / 10 meters) while connected to a device, Bluez 2S will disconnect from the device, there will be a single beep every 10 seconds. If returned back within range within 3 minutes, it will automatically reconnect and you can hear a voice prompt "connected". If Bluez 2S is disconnected for a long time (more than 3 minutes), you need to press Multi-Function Button on the headset to reconnect the device.

Charging: (Fig.5)

Connect Bluez 2S to a standard USB port on your PC or a wall charger via the Micro-USB Charging Cable. Bluez 2S will be fully charged within 2 hours. The LED Indicator will show solid red when charging, and will turn solid blue when charging is completed.

Note

Though the headphones may have power right out of the box, it's recommended that Bluez 2S be fully charged before their first use.

The battery is designed to last the life to the product. It should only be removed by a recycling facility. Any attempt to remove or replace your battery may damage the product and void your warranty.

Other actions

Action	Control	Voice prompt
Check battery status (*1)	Click Volume Up/Down Button	"Battery high", "Battery medium", "Battery low" or "Charge me".
Pause/play music	Click Multi-Function Button	Single beep
Change music EQ setting (*2)	Press and hold both volume up and volume down button for 2 seconds while playing music	"Equalization changed"
Adjust transducer volume (*3)	Click Volume Up/Down Button	Single beep
Skip to next song	Double click Multi-Function Button	Single beep

Answer or end a call	Click Multi-Function Button	Two beeps or single beep
Reject a call	Press and hold Multi-Function Button for 2 seconds	Two beeps
Mute/un-mute microphone	Press and hold both Volume Up and Down Button for 2 seconds	"Mute on" or "mute off"
Redial last number	Double click Multi-Function Button	"Last number redial"
Voice dial	Hold Multi-Function Button for 2 seconds	"Voice dial"
Answer the second incoming call and hang up current call	Press and hold Multi-Function Button for 2 seconds	Single beep
Answer the second incoming call and hold on the current call	Click Multi-Function Button to answer the second incoming call, and click it again to switch to the previous phone call	Single beep
Reset (*4)	Enter pairing mode, then press and hold Multi-Function Button, Volume Up and Volume Down Buttons for 3 seconds	Two beeps

Note

1. You can only check speaker volume status while Bluez 2S is in standby mode. Bluez 2S will notice you "charge me" every 2 minutes when low battery, and the LED Indicator flashes slowly.

2. EQ setting will reset to default if Bluez 2S is re-paired.
3. Volume Control is only valid while Bluez 2S is playing music or in the call.
4. Reset erases all paired devices stored in your headset.
5. Some features are phone / network dependent.

LED indicator

Color	Status
Red (slow flash)	Low battery
Red (solid)	Charging
Blue (solid)	Charging complete
Blue and Red (flash)	Pairing mode
Blue (quick flash)	Incoming call

Specifications

Playback time	up to 6 hours
Fully charging time	2 hours
The standby time	up to 10 days
Wireless range	33 feet / 10 meters
Bluetooth version	Bluetooth 3.0
Compatible Bluetooth profiles	A2DP, AVRCP, HSP, HFP
Transducer sensitivity	100±3dB
Microphone sensitivity	-40±3dB
Weight	1.45 ounces / 41 grams