

# K34 Series - Ballast Pan Strip T8 LED Tube Kit

## Design

- Made in USA
- 4' Ballast covers for 4.25" channel
- Pre-wire option for power to one or both ends
- One-piece center bracket
- Quarter turn ballast cover design
- Sockets snap-in & twist locking

## Application


- Retail
- Warehouses
- Aisles

## Components


- Ballast Cover (1 or 2)
- Brackets (2 or 3)
- Lamp Holders (2 to 8)
- Tek Screws (4 or 8)

## Dimensions

- Ballast Cover: (L) 46.50" x (W) 4.38" x (H) 0.50"
- Brackets: (L) 4.28" x (W) 2.50" x (H) 1.75"

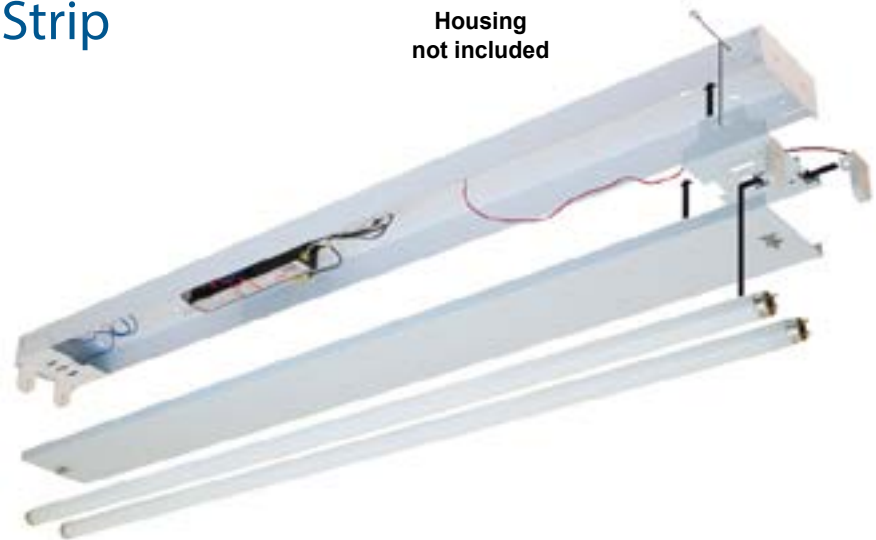

Housing  
not included



PW1 (optional)  
2 Lamp 4'  
Configuration

Input Wattage/Lumens		
Fix Config.	System Wattage	Lumens
1 Lamp	18	2000
2 Lamp	36	4000
3 Lamp	54	6000
4 Lamp	72	8000

\*Information based on LeanLight LED tube.

## Fixture Ordering Guide

### K34-UB04-WA-FLS

Series	Lamps	Wattage	Length	Material	Options
K34	01 - 1 Lamp	B - T8	02 - 2'	WA - 91% White Aluminum	FLN = Non-Shunted Lamp Holders  FLS = Shunted Lamp Holders  PW1 = Non-Shunted Sockets, Pre-Wired for power to one end  PW2 = Shunted Sockets, Pre-Wired for power to two ends
	02 - 2 Lamp		04 - 4'		
	04 - 4 Lamp		08 - 8'		