

Slapstik v2



BATTERY AND POWER

1. Your Bumpboxx Slapstik V2 features a rechargeable battery.
2. Charge your battery using the included Type-C charging cable and the included 5v  2a USB Wall Charger.
3. One of four LED indicator lights will flash white while charging, which LED depends on current charge level, each light represents 25% battery. All 4 lights will stay solid when fully charged.
4. Full charge cycle takes 4-6 hours.
5. Full battery could be used for up to 22 hours of playtime: up to 5-7 hours at max volume, up to 8-10 hours at 75% volume, up to 22 hours or more at 50% volume or less volume with the LED function on; up to 6-8 hours at max volume, up to 9-11 hours at 75% volume, up to 24 hours or more at 50% volume or less volume with the LED function off.
6. Please charge the battery for 4-6 hours before using it for the first time.
7. Your Bumpboxx Slapstik V2 doubles as a battery bank (See Phone Charging section for instructions)

BLUETOOTH CONNECTION

1. Once powered on, your Bumpboxx Slapstik V2 will start in Bluetooth mode and is ready for pairing with a mobile device.
2. Scan for "Slapstik V2" on your mobile device.
3. Pair via Bluetooth.
4. Once paired, the volume and tracks can be controlled by both the Slapstik V2's control panel (tap for volume control and hold for track control) or by the paired mobile device.

Note: If you are unable to establish a connection, please tap the  button, then go back to step 2.

MODE CONTROL

1. **Bluetooth** - Connect your wireless device via Bluetooth. (See Bluetooth Connection section for instructions).
2. **TWS Mode** - Link 2 Bumpboxx Slapstik V2 devices for a True Wireless Stereo experience. (See TWS Pairing section for instructions).
3. **LED Control** - Tap the LED button, while the unit is playing to scan through 5 different LED modes.


PHONE CHARGING

1. Un-clip your included Bumpboxx charging cable or use your own Type-C charging cable.
2. Plug in any side to your Bumpboxx Slapstik V2 Type-C In/Out port.
3. Plug in the opposite end to your mobile device. (Note, some Type-C to Type-C charging cables are unidirectional, if it is not charging, swap the direction of the cable).

TWS PAIRING

1. Power on both Bumpboxx Slapstik V2 devices. They will automatically start in Bluetooth mode. Make sure both Bumpboxx Slapstik V2 devices have an open Bluetooth connection. (Please turn off Bluetooth on all previously paired cell phones within range or tap the TWS button on your Slapstik V2 to disconnect).
2. Hold the TWS button on your primary unit (the one closest to your device) for 2 seconds and release. You will hear a chime once the primary unit enters TWS search mode. If you successfully establish a TWS connection, the primary unit will have a solid white TWS status indicator LED and a flashing BT status indicator LED. The secondary unit should have a slow flashing white TWS status indicator LED. (If this is unsuccessful, hold the TWS button on both units for 8 seconds to soft reset until both units power down. Power the units back on and then go to back step 1.).
3. Just like you would normally do, find your Bumpboxx Slapstik V2 via your Bluetooth list on your phone and pair to it.
4. Crank up the volume and enjoy.

PANEL FUNCTIONS

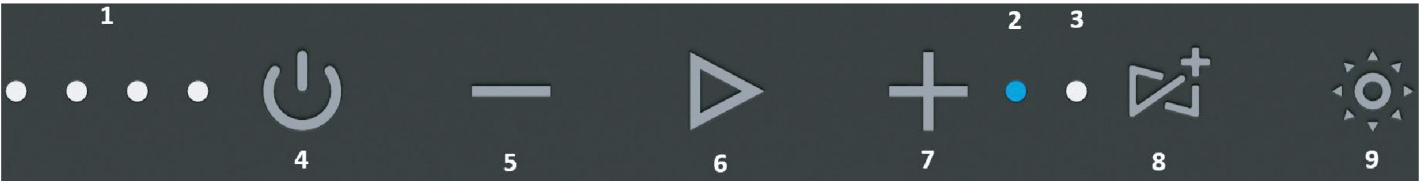

- 1. **Battery Life Meter and Charging Indicator LEDs** - Each light represents 25% Battery Life.
- 2. **BT Status Indicator LED** - Flashing blue light means you have an open connection. Solid blue light means the unit is connected to a device.
- 3. **TWS Status Indicator LED** - When the LED is off, it signifies that the device is not connected and is prepared for pairing. A steady white light indicates a successful connection as the primary unit, while a slow pulsating white light signifies a connection as a secondary unit to the.
- 4. **Power Button** - Hold 3 seconds to power On or Off. To switch EQ settings, tap once while music is playing to select between: Bumpboxx, Rock, or Pop settings.
- 5. **Volume Down/Previous Track** - Tap to decrease volume or hold to go to the previous track.

PANEL FUNCTIONS

- 6. **Play/Pause Button** - Tap once to play or tap once while music is playing to pause.
- 7. **Volume Up/Next Track** - Tap to increase volume or hold to skip to the next track.
- 8. **TWS Button** - Tap button once to disconnect from Bluetooth device, hold 2 seconds to connect or disconnect TWS, or hold 8 seconds to perform a soft reset of Bluetooth and TWS history.
- 9. **LED Mode Button** - Tap once to switch between 5 LED Modes or hold 2 seconds to power LED's off.
- 10. **Type-C In/Out Charger Port**
- 11. **Aux Input**
- 12. **USB Input**

SPECIFICATIONS

- **Speakers:** 2x 2" Full Range Driver
- **Bass:** 3.5" Passive Radiator
- **Peak Power:** 40w
- **Waterproof IPX7 Rating**
- **TWS Pairing Capabilities**
- **Bluetooth Version:** 5.3
- **Bluetooth Range:** Up To 30 Feet
- **LED Mode:** 5 Settings
- **Battery Life:** Up To 22 Hours
- **Recharge Time:** 4-6 Hours **Charging:** Type-C 5v  2a **Charger**
- **Battery:** 12000mAh
- **Dimensions:** 9" x 2.25" x 4" & 1lb 14oz

ACCESSORIES

Type-C to Type-C Charging Cable With Clip x1

Carabiner x1 5v  2a

Type-C Wall Plug x1

QR Card x1

AUTOMATIC SHUTOFF

1. If there is no activity for 30 minutes, the unit will automatically power off.
2. During the charging period, the unit will automatically power off if inactive after 30 minutes.
3. When the battery life has depleted, the unit will automatically power off.

BEST CARE INSTRUCTIONS

- Charge your Bumpboxx Slapstik V2 4-6 hours before your first use.
- It is perfectly safe to use your unit during the initial charging process.
- If moisture should occur, use a dry towel to wipe the surface dry.