
Bug Shelter Pitching Guide

Pitching with a YAMA tarp pitched in the a-frame fashion, or the Cirriform Tarp

Before getting started, please see the "Rigging" tab on the product's page for information about installing the rigging!




- For wider pitches, clip the shock cord directly to the tarp's corner tie-out.
- Shorten the effective length of the shock cord by running it through the tarp's tieout and then clipping it back to itself.
- To take up slack in the shock cord, try passing it through the tarp's corner tieout before clipping it off to the stake.
- 1. Connect shock cord (red) from top corners (4) of tub to tarp's corners.
- 2. Connect shock cord (red) from Bug Shelter's apexes (2) to tarp's ridgeline.

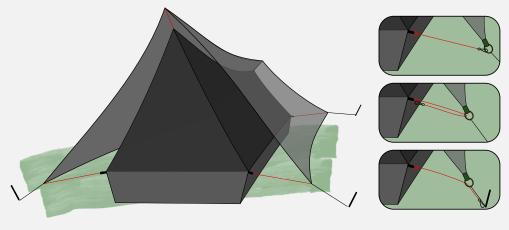



- 1. Clip the shock cords (red) at the tub's corners back to the tub's corners to fold them in half and create a big loop.
- 2. Stake out these loops so the floor is pulled taut and evenly between the corners.
- 3. Attach guylines (blue; not included) to the Bug Shelter's apexes and stake them out.
- 4. Place your poles under the guylines and tension the lines to raise the apexes and tub. To secure the line, wrap it around your trekking pole above the basket, or use our "guyline grommets" (not included).
- If you're not achieving the full height of the tub, you might need to raise the apexes higher and/or bring the corner stakes in closer to the tub.
- For better stability, place the poles closer to the shelter and increase tension at the corners.

Pitching with the optional stand-alone rigging kit

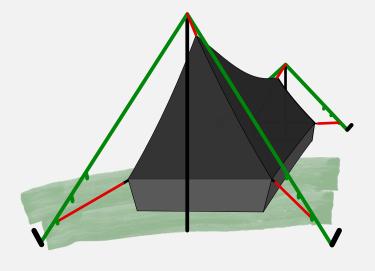

- 1. Clip the shock cords (red) from the tub's corners to the loops closest to the ends of the rigging kit cordage.
- 2. Stake out the ends of the rigging kit cordage so the tub is pulled evenly taut.
- 3. Insert your pole tips into the grommets on the rigging kit.
- 4. Connect shock cord (red) from Bug Shelter's apexes (2) to the loops attached to the grommets.
- For better stability, move the stakes further forward at the front and rearward at the rear
- For more information, please see the stand-alone rigging kit's product page.