


# MEMS MICROPHONE BREAKOUT BOARD

(4 x 5, 1.20 mm)

SKU: ICB80001



## **Description**

This is a breakout board that was designed to be a DIP adapter specifically for InvenSense parts, INMP401 or ADMP401.

#### **Technical Details**

Footprint Dimensions		
Body (mm):	4 x 5	
Pitch (mm):	1.20	
Thermal Pad (mm):	n/a	
Breakout Board Dimensions		
Board Dimensions (mil):	320 x 440	
Board Thickness (mil):	62	
Through-Hole Spacing (mil):	100 mil (X-axis)	
	n/a (Y-axis)	
Breakout Board Specifications		
Board Layers:	2	
Finish:	Immersion Gold	
Copper:	1 oz	
Traces (mil)	30	
Trace Lengths (mil):	<50	
Pin/Through-Hole Count:	3	





#### What's Included?

Parts Installed on Board:	None
Parts Included	3 PIN Break Away Header
(but not installed):	(Straight)

#### **Additional Features**

- Easily identifiable PIN 1 indicator and PIN numbers
- White silk "Label Pads" allow you to label the pins for quick reference
- Extended through-hole pads make for an easy connection point for surface mount parts
- Breadboard friendly pin spacing
- All boards have been E-tested for failures and are RoHS compliant

# **Scale Image**





1:1 SCALE

(Print this page to use the scale image to test the fit of the electronic part.)



## **Dimensions**



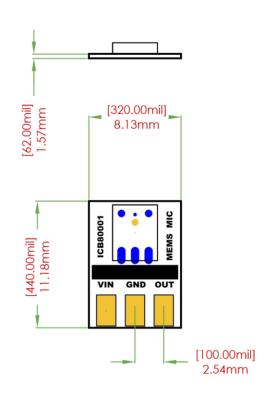

FOOTPRINT DIMENSIONS

BREAKOUT BOARD DIMENSIONS