



## HiBoost Consumer Booster Home 10K

### Overview

The HiBoost Home 10K is a 65dB, ultra wide band cell phone signal booster that covers up to 10,000 square feet with clear voice and high speed 2G, 3G and 4G data. It can also support large capacities of up to 150 cell phone users. With our Home 10K, enjoy clear calls and high speed data all around your house at the lowest price guaranteed.



### FCC Fulfillment

- FCC Grant Code OWW for this product series. To get detailed information, go to <https://apps.fcc.gov/oetcf/eas/reports/GenericSearch.cfm>
- FCC approved this equipment for use with all US carriers



### Key Features

- All 2G, 3G and 4G standards are supported
- Supports up to 150 users
- Does not require professional installation
- Low interference to cell tower
- FCC certified
- MGC special function
- Streamlined design
- Quality metal construction, strong and durable




### Booster Kit Includes

- HiBoost Home 10K signal booster
- Outdoor Wide Band Directional Antenna with 30 ft Low-loss HiBoost200 Cable
- Indoor Wide Band Panel Antenna with 30 ft Low-loss HiBoost200 Cable

## Specification

UL Frequency Range	698-716 / 776 – 787 / 824-849 / 1850-1915 / 1710-1755
DL Frequency Range	728-746 / 746 – 757 / 869-894 / 1930-1995 / 2110-2155
Supported Standards	CDMA, WCDMA, GSM, EDGE, HSPA+, EVDO, LTE and all cellular standards
Max. Gain	65dB
Max. Output Power	UL17~24dBm, DL12dBm
MGC ( Step Attenuation )	≥25 dB/1 dB step
I/O Port	N-Female
Impedance	50 ohm
Environment Conditions	IP40
Dimensions	8.6*6.5*2inch/218*165*50mm
Weight	≤5.0Lbs/2.2Kg
Power Supply	Input AC100~240V, 50/60Hz, Output DC 12V/3A

## Installation Example

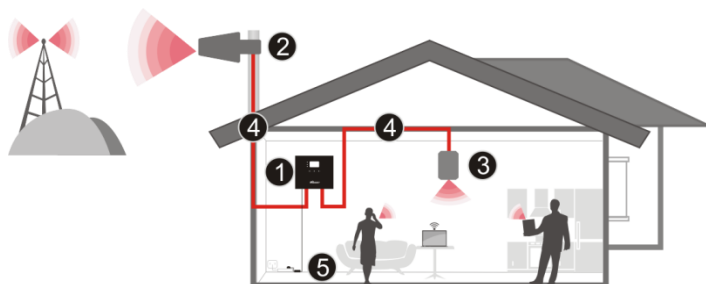

- ① Home 10K Signal Booster
- ② Outdoor Wide Band Directional Antenna
- ③ Indoor Wide Band Panel Antenna
- ④ 30 ft Low-loss HiBoost200 Cable
- ⑤ 12V/3A, AC/DC Power Supply

This is a **CONSUMER** device.

**BEFORE USE**, you **MUST REGISTER THIS DEVICE** with your wireless provider and have your provider's consent. Most wireless providers consent to the use of signal boosters. Some providers may not consent to the use of this device on their network. If you are unsure, contact your provider.

You **MUST** operate this device with approved antennas and cables as specified by the manufacturer. Antennas **MUST** be installed least 20 cm (8 inches) from any person.

You **MUST** cease operating this device immediately if requested by the FCC or a licensed wireless service provider.

**WARNING.** E911 location information may not be provided or may be inaccurate for calls served by using this device.

This device may be operated **ONLY** in a fixed location for in-building use.