


Set Up Instructions


WLMST-H-L

Step 1: Assemble the 3-piece support pole using x4 connecting bars with x8 screws by inserting the bars into the grooves and pushing the poles together.


Note: Placement of the flat bars below.

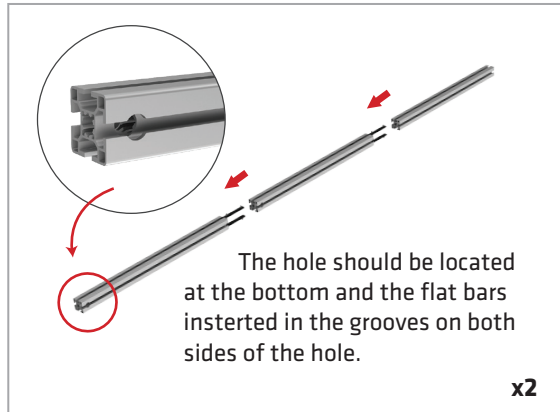


Step 2: Tighten the screws on the connector bars to secure the 3-piece support pole together.

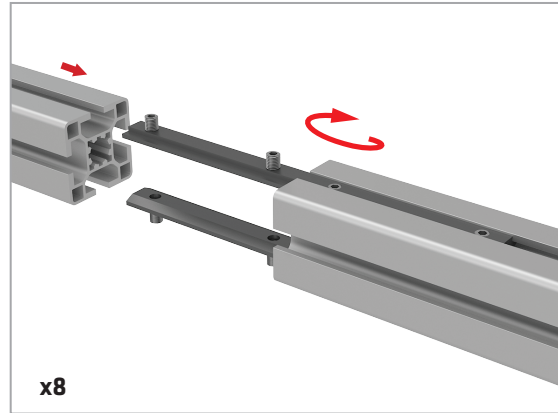

Step 3: Insert the round column nut into the hole at the bottom of the pole. Position the holes in the column nut to face up and down.

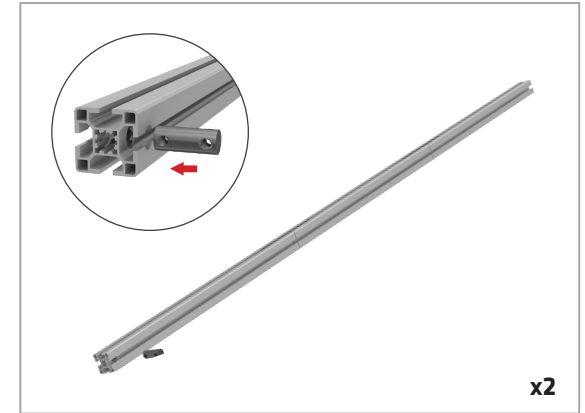


Step 4: Align the support poles with the holes in the base and insert screws through the bottom of the base. Tighten screws to secure.

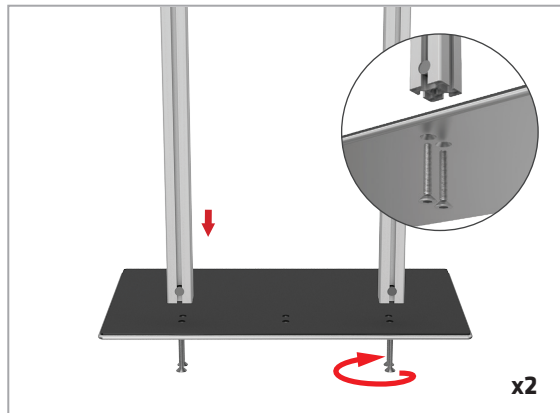

If you are installing the TV Stand behind a WaveLine Display with pass through holes already cut into the graphic, then skip to **Step 9**.



Step 5: To install the VESA Mount insert the screw through the hole and into the wedge. Place the wedge into the groove of the pole and rotate. Tighten screw.

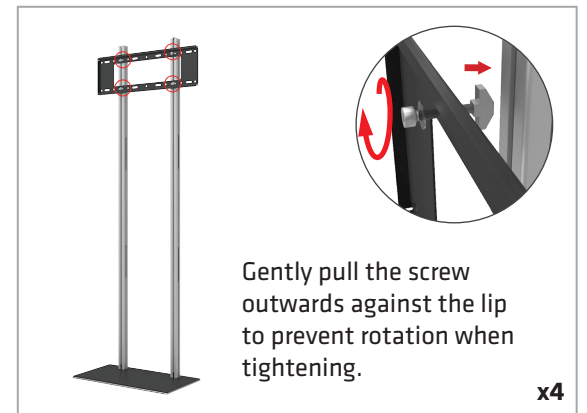

Set Up Instructions

WLMST-H-L


Step 6: Attach x2 - VESA Mounting Bars to the desired position on the back of the TV with x4 screws. Use the same position on each side of the TV for both mounting bars.



Step 7: Hinge TV with VESA Bars onto the VESA Mounting Plate until the TV hangs freely on its own.




Step 8: Secure the bars onto the mounting plate with x2 locking screws to keep TV from moving.

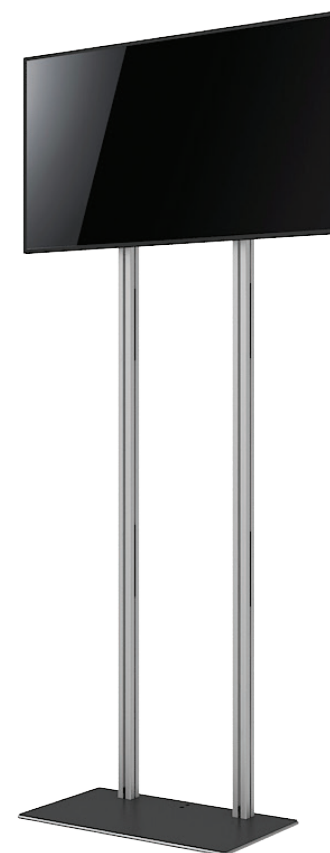


Set Up Instructions

WLMST-H-L

Step 9: Place the stand without the Vesa Mounting Plate behind the display and align the support poles up with the holes in the graphic.

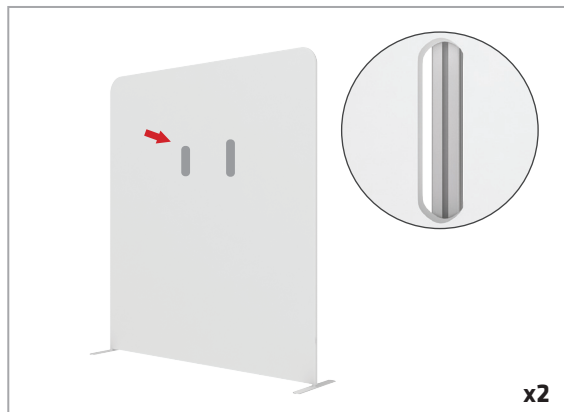

Step 10: To install the VESA Mount insert the long screw through the hole and plastic cylinder extension into the wedge. Place the wedge into the groove of the pole and rotate. Tighten screw.

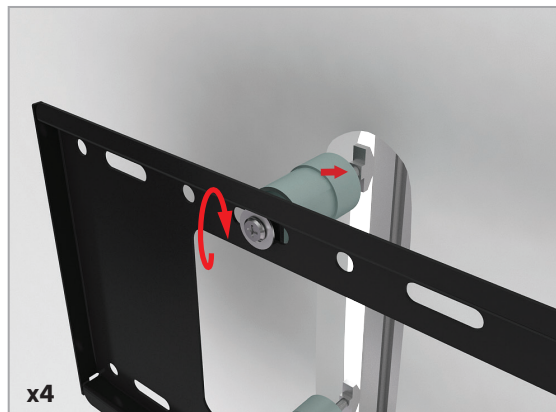

Step 11: Refer back to steps 6,7 and 8 to complete the installation.

