

**CODE NUMBER**

3830002

**DESCRIPTION**

Mobile Handwashing Station with SF-2250 Sensor-operated Faucet and Corian® Sink Deck with Vitreous China Undermount Bowl.

**DETAILS**

- Material: Corian
- Power Type: AC or DC (18VDC rechargeable battery included)

**FEATURES**

Mobile Handwashing Station with the following features:

- Completely self-contained model (can be fully powered by rechargeable battery; can be used with water jugs and does not require external water supply)
- Dimensions: 34 1/2" W x 26 3/16" D x 56 3/16" H
- Set up to use either battery (18VDC rechargeable battery included) or AC power (twist lock plug supplied, site needs to purchase twist lock connector)
- Sloan® SF-2250 Sensor-operated Faucet
- Purell® CS-8 Wall-mounted Sensor Foam Soap Dispenser
- Touchless enMotion® Paper Towel Dispenser
- Corian® sink deck with vitreous china undermount bowl
- Trash bag holder
- Pull handle for easy relocation
- Lockable caster wheels
- Set up to use either external water supply (3/4" water connection) or two 5 gallon water jugs (jugs not included)
- 16 gallon greywater tank
- Pump-powered drain
- Includes back panel graphics with CDC handwashing guidelines
- BAA (Buy American Act) compliant

Standard colors:

- Sink Deck: Corian Silver Gray
- Enclosure Powder Coat Color: Textured Gray (PMS 431C)

Optional Sink deck colors:

- Glacier White
- Linen
- Sandstone
- Cameo White

Optional enclosure colors:

- Textured Blue
- Bronze
- Black
- Dark Gray



**COMPLIANCES & CERTIFICATIONS**



(BAA Compliant)

**RECOMMENDED SPECIFICATION**

Mobile Handwashing Station model no. MH-2000. Product to be fabricated with Corian solid surface top and undermount vitreous china bowl. Includes Sloan sensor-operated faucet. Includes wall-mounted sensor foam soap dispenser and sensor-operated paper towel dispenser. Includes 16 gallon greywater tank. Set up to use either external water supply or two 5 gallon water jugs (jugs not included). Supplied with enclosure and lockable caster wheels. Set up to use either battery (18VDC rechargeable battery included) or AC power (twist lock plug supplied, site needs to purchase twist lock connector).

**DOWNLOADS**


- [MH-2000 Installation Instructions](#)
- [Additional Downloads](#)

**NOTES**

All information contained within this document subject to change without notice.



**ROUGH-IN**

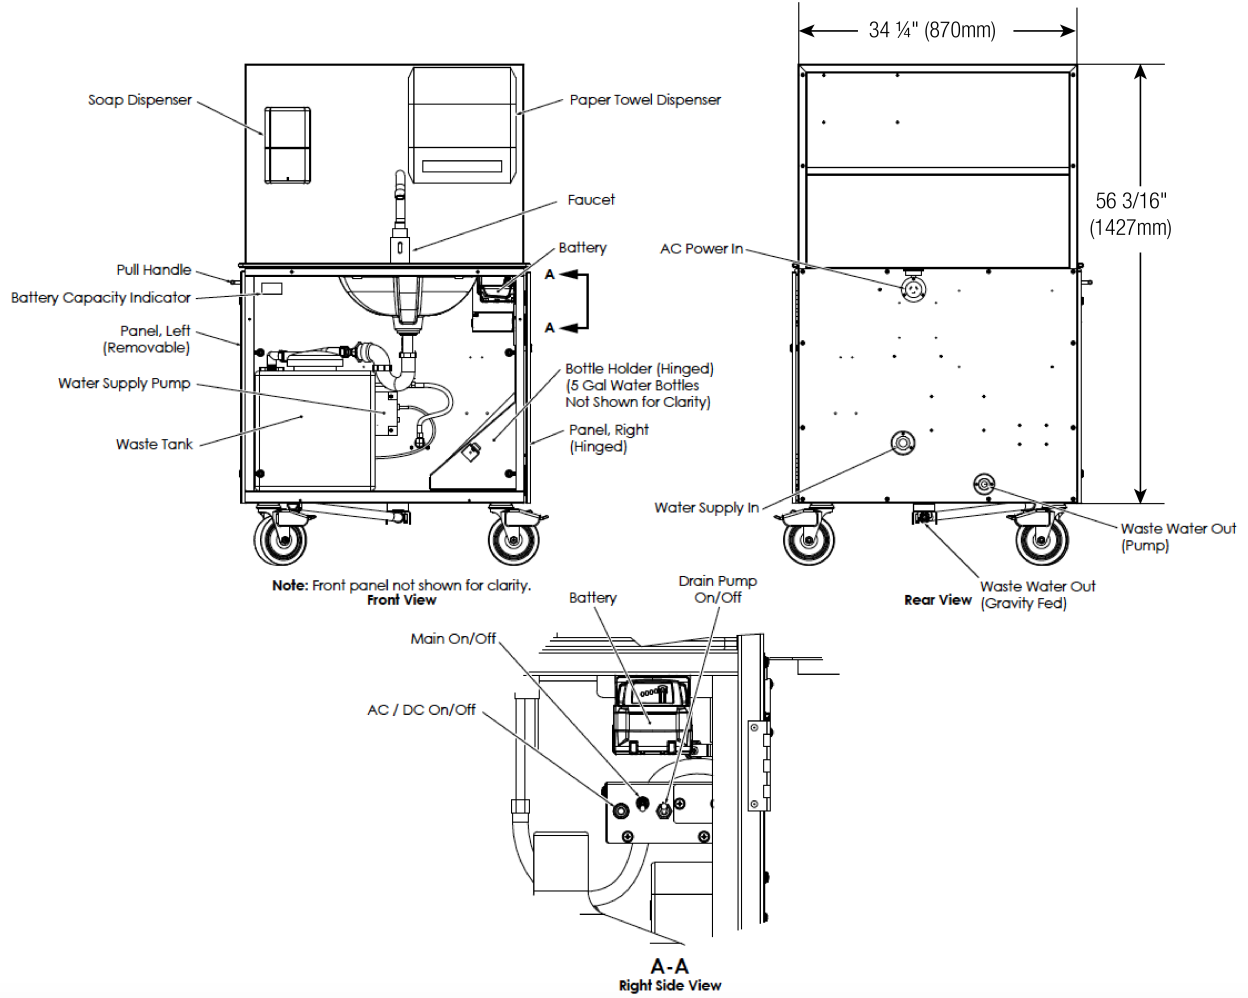

**SLOAN  
REPAIR  
.COM**

TOLL FREE: 800-442-6622  
[www.store.sloanrepair.com](http://www.store.sloanrepair.com)