

Passive 10/100 Data and Power Injector Splitter Kit

The Passive PoE Injector & Splitter Set allows you to connect and power any device (Wi-Fi, IP Camera, Intercom and Access Control reader) that supports a 12 to 15VDC power input.

Use the injector to inject power over the cat5e/6 cable and splitter to split the power at the device to power it up via an external DC jack.


Product Image



Features

- 1 x 10/100Mbps Injector with standard Female DC connector
- 1 x 10/100Mbps Splitter with standard Male DC connector
- Voltage Range: 12-15VDC
- Transmission Distance: 0 to 50m (Cable dependant)
- LED status indicator
- Operating Temperature – 10 °C to 55 °C

Application

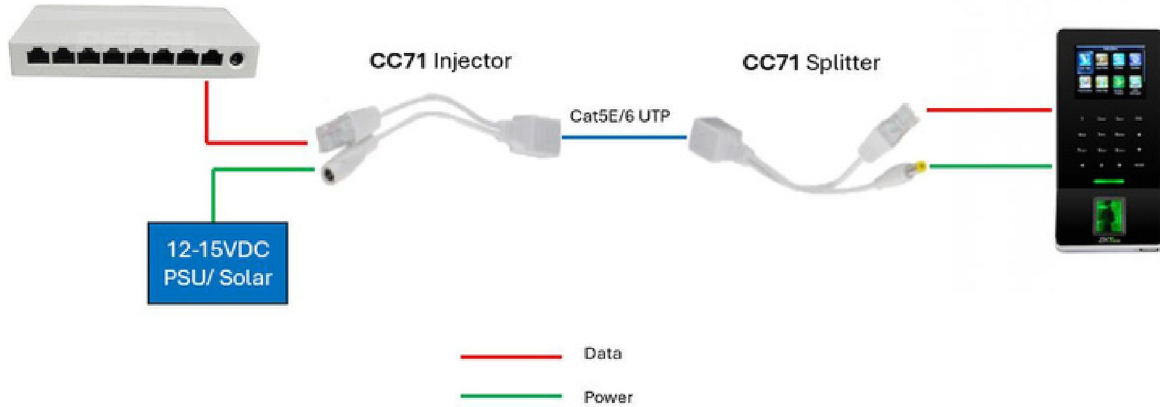

Technical Specifications

| Hardware | |
|-------------------------|---|
| Ports | 1 x RJ45 LAN Port with Standard Female Power Connector 1 x RJ45 LAN Port with Standard Male Power Connector |
| Power support | Power input: 12VDC to 15VDC Power output: matched to Input power Maximum Current -1000mA (not fused) |
| Transmission Distance | Up to 50m (Dependent on cable) |
| Transmission Speed | 10/100Mbps |
| Application | Ideal for IP Cameras, Intercoms phone, Wi-Fi Access Points and Access Control Readers |
| Physical Specifications | Size(L*W*H) : 41mm x 24.5mm x 21.6mm |
| Working Environment | Operating Temperature: -10°C ~55°C |
| | LED Status Indicator |
| | Storage Temperature: -40°C ~85°C |