


Congratulations on the purchase of your Underwater Kinetics Lighthouse work and safety light! This waterproof high intensity tilt and swivel LED hand light includes a magnetic base to provide you with maximum versatility for a safe and efficient work environment. The durable design will give you many years of trouble-free lighting.

Technical Data UK4AA eLED

Batteries: 4x Alkaline AA /LR6/mignon or Energizer AA Ultimate Lithium
 Lamp type: High-Intensity LED
 Size: 8.4 x 2.0 x 1.60 in; 21.4 x 5.1 x 4.1 cm
 Weight: 8.1 oz; 231 g (with batteries and clip)
 Materials: ABS, poly carbonate, copper alloys, stainless steel
 Immersion depth: 10 feet / 3 m

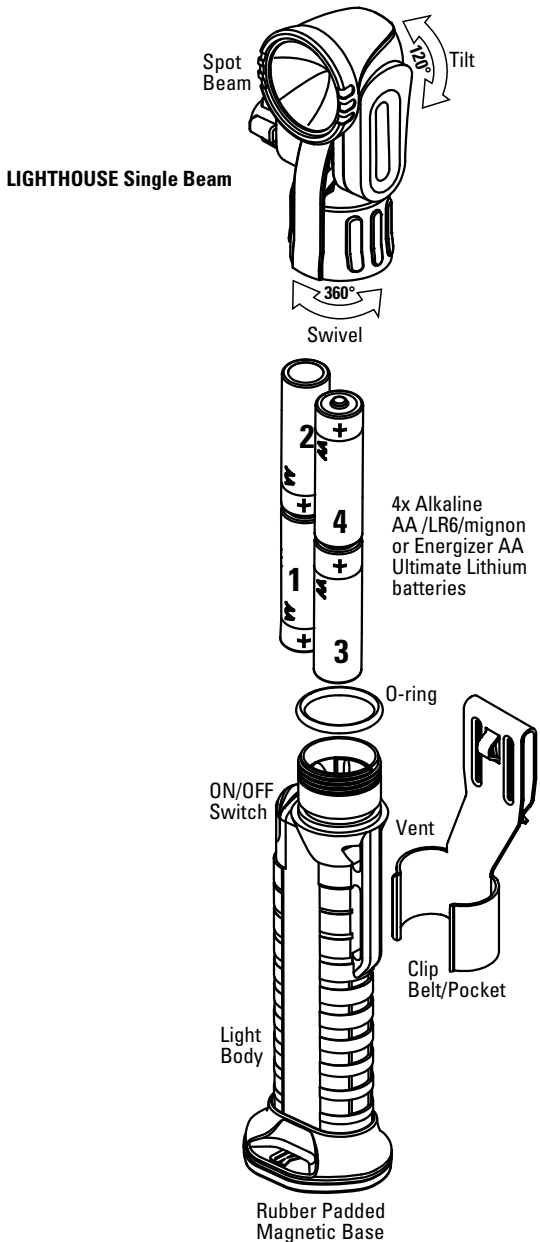

OPERATING INSTRUCTIONS AND IMPORTANT INFORMATION

Battery Installation

To install batteries, hold the case in the position shown. (1) Drop two batteries with the positive + end down into the case. (2) Then drop two batteries with positive + end facing up into the case. Place the Lamp Head over the mouth of the light and twist it onto the case.

ON/OFF

To operate the light push in on the black rubber switch located on the case near the head to turn the light ON and OFF.

Tilt & Swivel Lamp Head

The Lamp Head can be tilted up or down 120° and locked into position with the Lock Knob. It can also be rotated from side to side 360° for the best lighting position.

Rubber Padded Magnetic Base

A powerful magnet is located in the base of the Lighthouse so that it can be attached to any steel or magnetic surface. It is not attracted to aluminum, copper or other non ferrous metals.

Belt/Pocket Clip

A stainless steel or nylon Belt/Pocket Clip can be snapped onto the side of the Lighthouse. First, insert one side of the clip through the slot on the side of the Case. Then snap the clip around the case as shown in the illustration.

O-Ring Seal

The O-ring and threads must always be kept clean. Lightly lubricate the O-ring which seals the rubber covered bezel and case with silicone grease.

Pressure Equalizing Vent

Air and gas from battery leakage can pass freely in and out of the LightHouse through a black triangle shaped vent in the side of the light. Do not allow dirt or grease to accumulate on the vent or it will not operate properly.

Care and Maintenance

- Keep area around the O-ring clean.
- If the light floods, empty it immediately, rinse with fresh water and dry completely before assembly
- Do not store batteries in the light for long periods of time when not in use; they may leak and damage the light.

US - Limited Lifetime Warranty

Underwater Kinetics products are engineered for maximum performance and durability. All products carry a Limited Lifetime Warranty to the original retail purchaser to be free from defective material and workmanship under normal and intended use. In addition, the Underwater Kinetics Limited Warranty covers materials used in its products to the original purchaser, from the date of purchase, as follows: plastics for 10 years; rubber for 3 years, LED and electronics for 2 year, rechargeable batteries for 90 days.

In the event the original retail purchaser detects a defect in the material or workmanship, the product along with proof of purchase date should be returned to an authorized Underwater Kinetics dealer or directly to Underwater Kinetics with the postage prepaid. Underwater Kinetics agrees to repair or replace at Underwater Kinetics' sole discretion any product found to be defective in material or workmanship within the time period specified above. For the complete Limited Lifetime Warranty write to Underwater Kinetics or go to the web site www.uwk.com.

Address all correspondence and returns to:
 Underwater Kinetics, 13400 Danielson Street, Poway, CA 92064
 Tel: (858) 513-9100, (800) 327-7388; e-mail: info@uwk.com;
 web: www.uwk.com; e-mail info@uwk.com

CAUTION

Batteries can vent hydrogen gas and possibly cause an explosion (1) if they are installed without the proper polarity, (2) if they are not the same type, brand name and age or (3) if they are completely discharged.

- Load batteries according to the diagram.
- Discard all batteries as soon as they are drained or no longer produce light.
- Do not mix batteries of different type, brand or age.