




RGB Backlit Switch-Art Scene-Pad Installation



1 Connect the receiver to the lights



2 Hold the LINK button until the LED starts flashing



3 Then press a button on the Scene-Pad within 25 sec


To unlink a button: Repeat steps 2&3.

To clear all links in a Receiver: Hold the Link Button until the LED is ON solid (10 sec) then release.

A Receiver can link up to 30 different buttons.

Mounting options: standard 2x4 mounting holes or double-sided tape


INSTALLATION & BACKLIGHT SETUP:

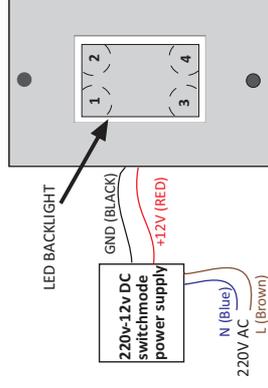

Button Operation: 4 Scene Buttons
Press in the marked areas "1,2,3,4"

Backlit LED Setup


- 1 Push and hold the center of the button for 10 seconds. Backlit LED will start flashing.
- 2 Release the center of the button, the led back-light will cycle through the RGB colours.
- 3 Press and release any of the corner buttons once the desired colour is displayed.



1 Remove Screws

2 Mount using 6mm screws and wall plugs


MOUNTING

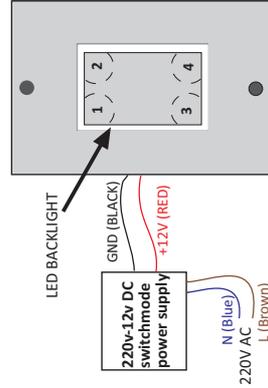

Button Operation: 4 Scene Buttons
Press in the marked areas "1,2,3,4"

Backlit LED Setup


- 1 Push and hold the center of the button for 10 seconds. Backlit LED will start flashing.
- 2 Release the center of the button, the led back-light will cycle through the RGB colours.
- 3 Press and release any of the corner buttons once the desired colour is displayed.




1 Remove Screws

2 Mount using 6mm screws and wall plugs


INSTALLATION & BACKLIGHT SETUP:

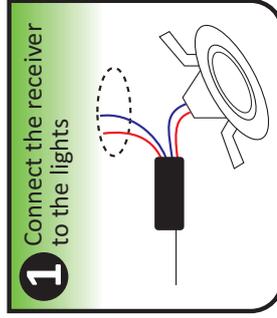

1 Connect the receiver to the lights

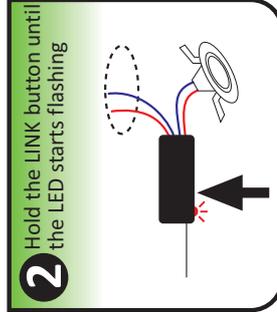

2 Hold the LINK button until the LED starts flashing

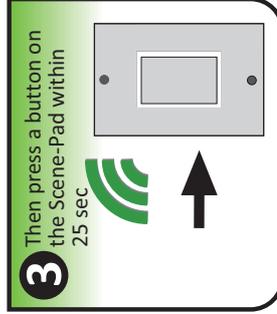

3 Then press a button on the Scene-Pad within 25 sec


To unlink a button: Repeat steps 2&3.

To clear all links in a Receiver: Hold the Link Button until the LED is ON solid (10 sec) then release.


A Receiver can link up to 30 different buttons.

Mounting options: standard 2x4 mounting holes or double-sided tape


SCENE SAVING:

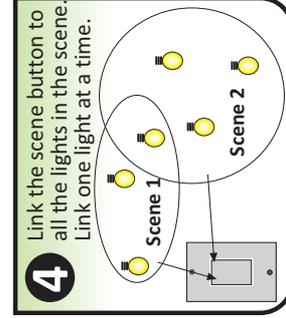

4 Link the scene button to all the lights in the scene. Link one light at a time.

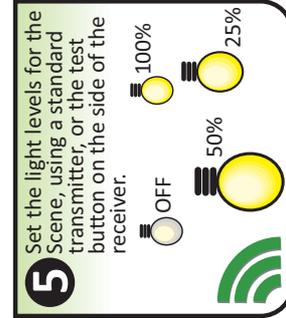


5 Set the light levels for the Scene, using a standard transmitter, or the test button on the side of the receiver.

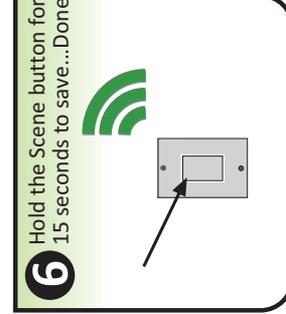


6 Hold the Scene button for 15 seconds to save... Done


SCENE SAVING:

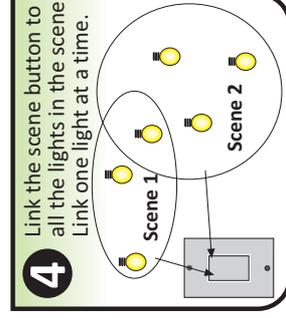

4 Link the scene button to all the lights in the scene. Link one light at a time.

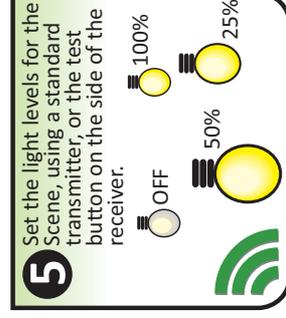

5 Set the light levels for the Scene, using a standard transmitter, or the test button on the side of the receiver.

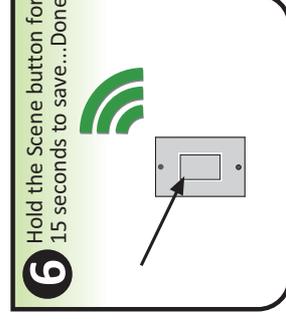

6 Hold the Scene button for 15 seconds to save... Done