

Nothing But LED Canopy Luminaire is the most economic fixture of its kind and offers exceptional performance, efficiency, and a unique design. Features such as high lumens per watt, outstanding efficacy, and field serviceability, make it an ideal commercial canopy solution. The contractor-friendly canopy luminaire includes fasteners and a locking collar, making installation easy, secure, and water-tight. It can be surface mounted easily from below the canopy deck and also has the ability to be pendant mounted.

- Up to 130 Lumens per watt
- Rugged low-profile die-cast aluminum housing
- Direct surface or recessed mount

- Sosen VA driver
- IP65 Waterproof Rated
- Universal 100-277Vac



SKU # Model #		Watts	Lumens	CCT	IP	Input Voltage	Certifications
1510119	BLT-CP3B-150WWASA1-a57	150W	20221m	5700K	IP65	100-277Vac	UL & DLC

Specifications

VIEWING ANGLE	110°
INPUT VOLTAGE	100-277V AC, 50 - 60Hz
POWER FACTOR	>0.9
DRIVER MODEL	Beyond Brand Driver
WATERPROOF RATING	IP65



LED TYPE	2835 (0.5W)
HOUSING	Aluminum
HOUSING COLOR	White


CORRELATED COLOR TEMPERATURE (CCT)

Others

OPERATING TEMPERATURE	APPLICATION	CRI	BEAM ANGLE	DIMMABLE
-4°F TO 113°F	Outdoor	>80	110°	No


Warranty & Qualification

WARRANTY	UL LISTED	DLC
5-Year Limited	Yes	Yes

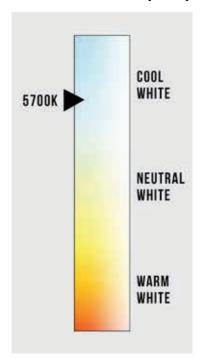




Dimensions

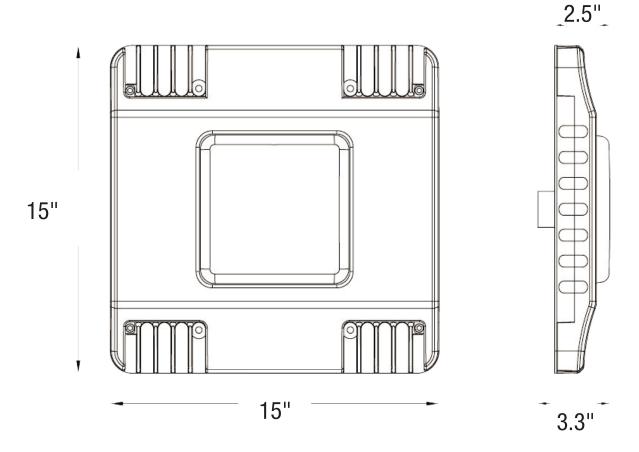


Packaging

Tolerance of Carton Size: ±0.590551 in, Tolerance of Weight: ±10%.

Model	Pcs/Box	Dimensions	Weight	Pallet Quantity	Pallet Weight	Pallet Dimensions
150W	1	17" X 17" X 5"	14 Lb			

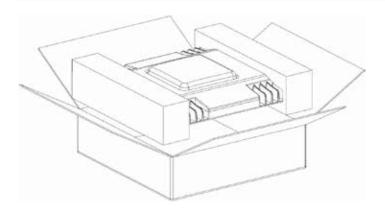


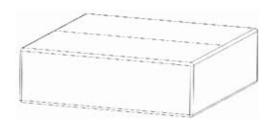




Distribution Diagram

I	DATA OF LA	MP		PHOTOME	TRIC DATA Eff: 109	9.55 lm/W
MODEL	ODEL BLT-CP3-150WSSPAA1		Imax (cd)	5162	S/MH(C0/180)	1.36
NOMINAL POWER (W) 150		LOR (%)	100.0	S/MH (C90/270)	1.36	
RATED VOLTAGE (V) 120		TOTAL FLUX(lm)	16060	η UP, DN (CO-180)	0.2,50.2	
NOMINAL FLUX(lm) 16059.6		CIE CLASS	DIRECT	η UP, DN (C180-360)	0.2,49.4	
LAMPS INSIDE 1		η up (%)	0.4	CIBSE SHR NOM	1.50	
TEST VOLTAGE(V) 120.0		η down (%)	99.6	CIBSE SHR MAX	1.50	

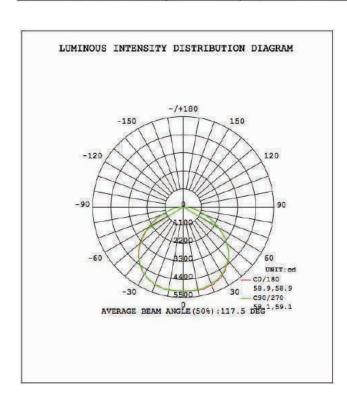

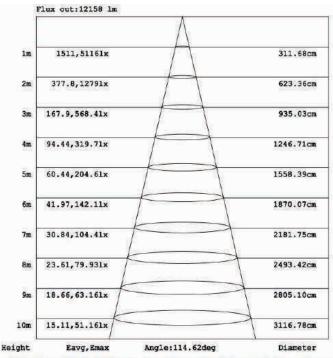

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance






Multiple Mounting Options







Pendant



Surface



Suspension



User Notice

- Please turn off the power before installing or changing assembly parts.
- The input voltage and lamps should be matching. Before connecting the power line, please make sure the wiring section is insulated.
- Only professionals should install and disassemble the lamps.

Trouble Shooting

- Flickering light Turn off the power and turn on again in 3 minutes. If the same phenomena occurs, then call Support.
- Not working Please check all power connections.



Application



